



Silicon Bridge Rectifiers

KBJ25A--KBJ25M

FEATURES

- Rating to 1000V PRV
- Surge overload rating to 200 Amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead solderable per MIL-STD-202 method 208



Lead-free

MECHANICAL DATA

- Polarity: Symbols molded on body
- Weight: 0.23 ounces, 6.6 grams
- Mounting position: Any

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	KBJ25A	KBJ25B	KBJ25D	KBJ25G	KBJ25J	KBJ25K	KBJ25M	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward Output current @T _A =25°C	I _{F(AV)}	25.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	200.0							A

Thermal Characteristics

Characteristic	Symbol	KBJ25A	KBJ25B	KBJ25D	KBJ25G	KBJ25J	KBJ25K	KBJ25M	UNITS
Typical junction capacitance per element	C _J	85							p F
Typical thermal resistance	R _{θJC}	0.6							°C/W
Operating junction temperature range	T _J	- 55 ---- + 150							°C
Storage temperature range	T _{STG}	- 55 ---- + 150							°C

Electrical Characteristics (@T_A = 25°C unless otherwise specified)


Characteristic	Symbol	KBJ25A	KBJ25B	KBJ25D	KBJ25G	KBJ25J	KBJ25K	KBJ25M	UNITS
Maximum instantaneous forward voltage @12.5A	V _F	1.1							V
Maximum reverse current @T _A =25 °C	I _R	10.0							μ A
at rated DC blocking voltage @T _A =100°C		1.0							mA



Silicon Bridge Rectifiers

KBJ25A--KBJ25M

PACKAGE OUTLINE DIMENSIONS

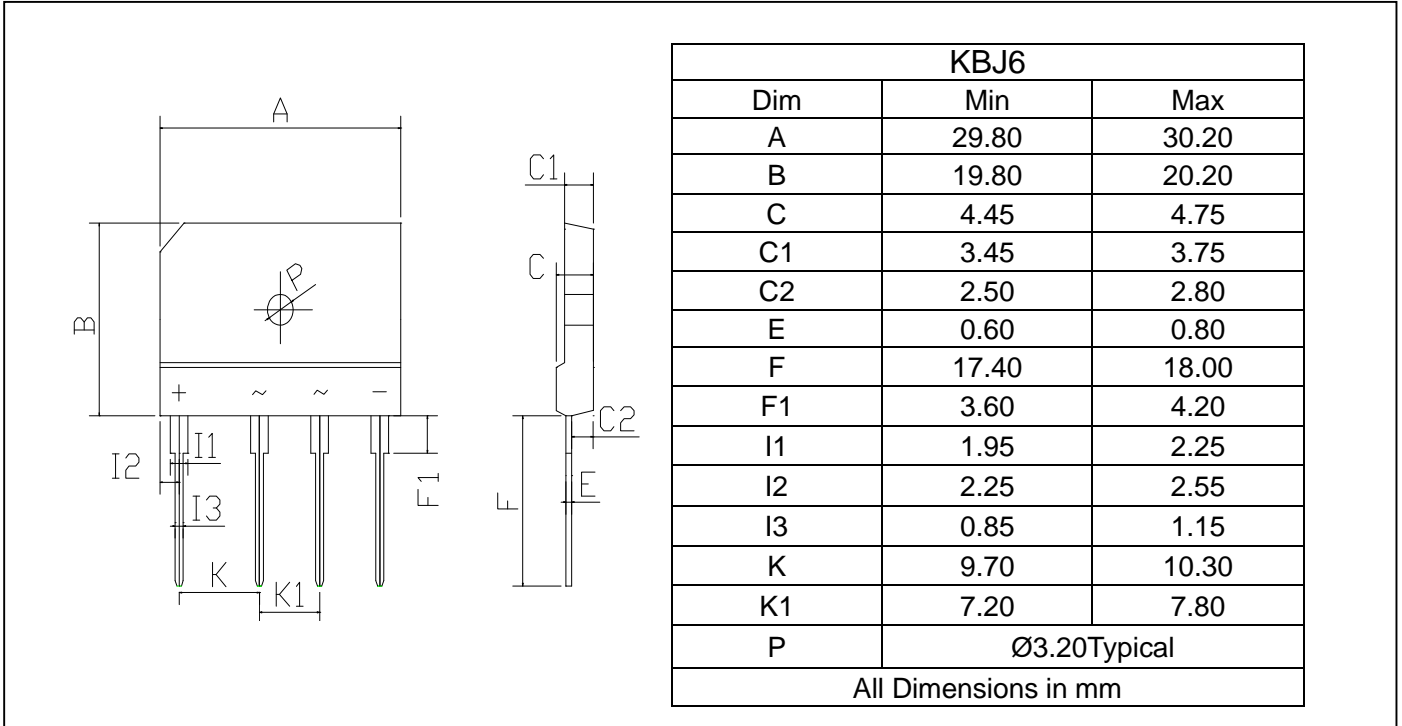

PACKAGE INFORMATION

Device	Package	Shipping
KBJ25A--KBJ25M	KBJ6	250 Units/Box



Silicon Bridge Rectifiers

KBJ25A--KBJ25M

FIG.1 – PEAK FORWARD SURGE CURRENT

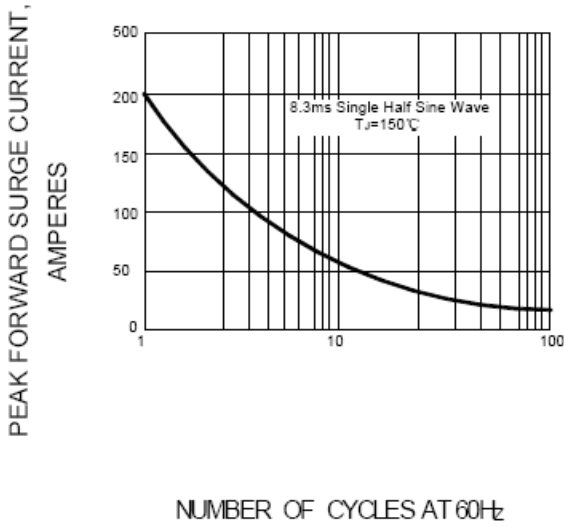


FIG.2 – FORWARD DERATING CURVE

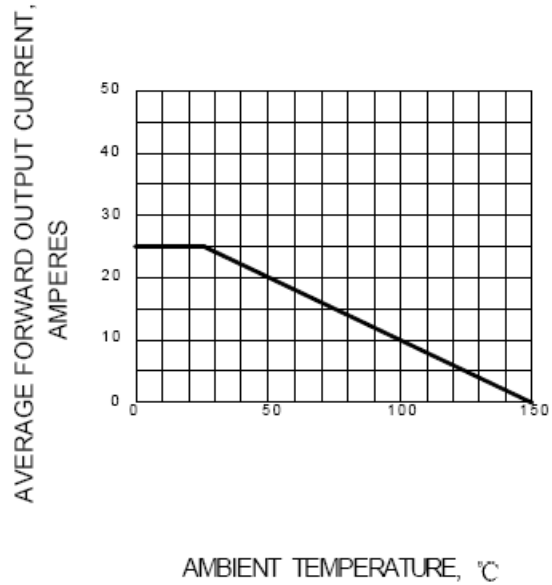


FIG.3 – TYPICAL FORWARD CHARACTERISTIC

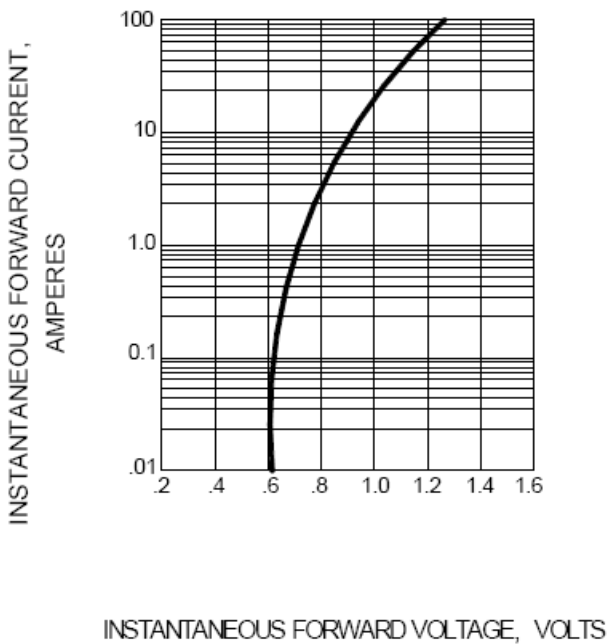


FIG.4 – TYPICAL JUNCTION CAPACITANCE

