





# KBJ6005 THRU KBJ610

## Silicon Bridge Rectifiers Glass Passivated Bridge Rectifiers

### Voltage Range 50 to 1000 Volts

### Current 6.0 Amperes

#### RATINGS AND CHARACTERISTIC CURVES ( KBJ6005 THRU KBJ610 )

FIG. 1 - FORWARD CURRENT DERATING CURVE

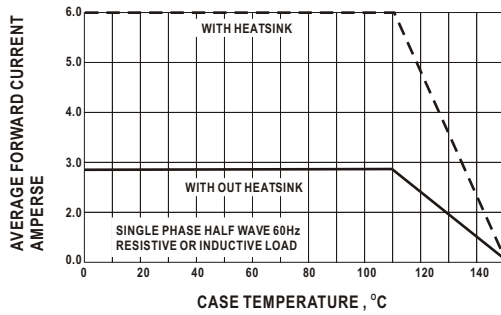


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

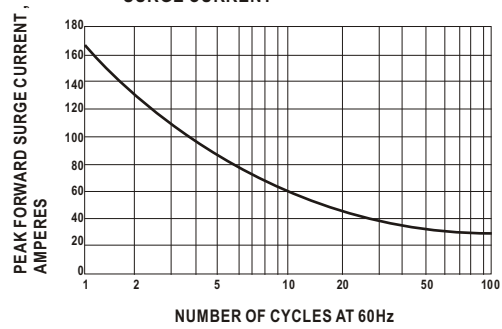


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

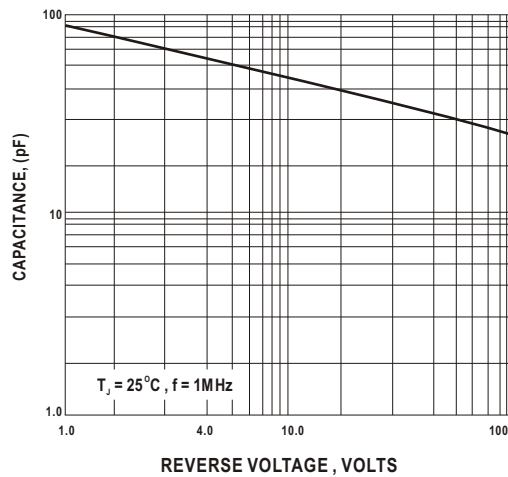


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS


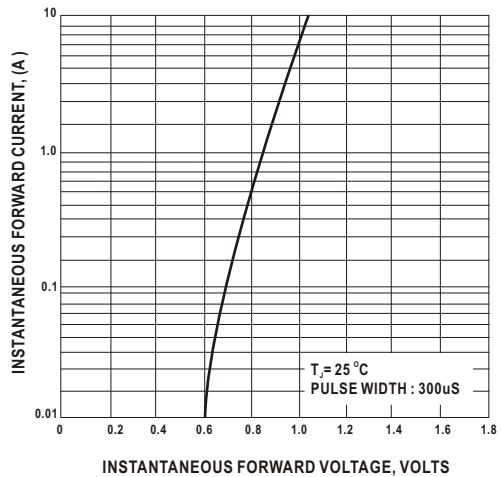


FIG. 5 - TYPICAL REVERSE CHARACTERISTICS

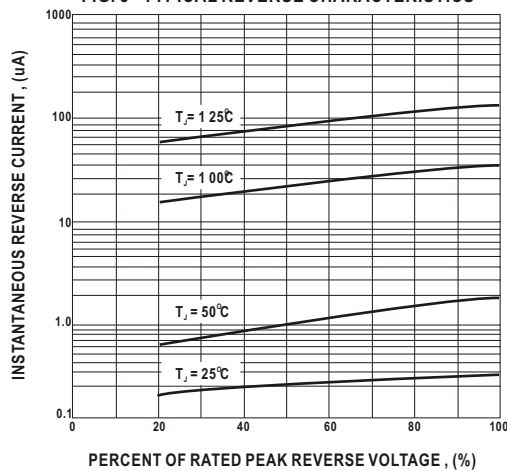

[Http://www.upm.com.tw](http://www.upm.com.tw)

E-mail: [upm.tw@msa.hinet.net](mailto:upm.tw@msa.hinet.net)