

KBL4005 THRU KBL410

SINGLE-PHASE BRIDGE RECTIFIER

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 4.0 Ampere


FEATURES

- ◆ High forward surge current capability.
- ◆ Ideal for printed circuit board.
- ◆ High temperature soldering guaranteed:
260°C/10 second, 0.375" (9.5mm) lead length
at 5 lbs. (2.3kg) tension.
- ◆ Electrically isolated base-1500 Volts.

Mechanical Data

- ◆ Case: Transfer molded plastic.
- ◆ Terminal: Lead solderable per MIL - STD - 202E
method 208°C.
- ◆ Mounting position: Any.
- ◆ Weight: 0.22 ounce, 6.21 gram.

KBL

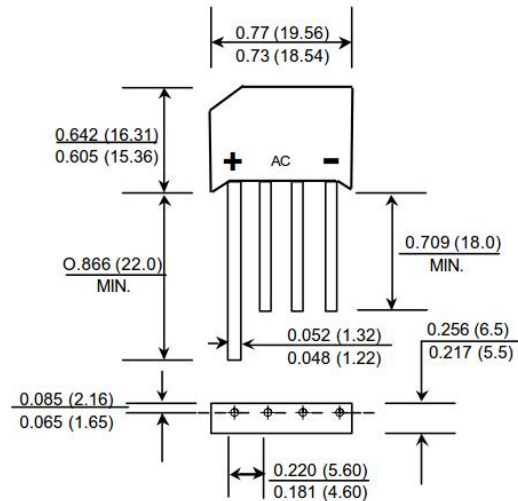

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

PARAMETER	SYMBOL	KBL4005	KBL401	KBL402	KBL404	KBL406	KBL408	KBL410	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Output Current at 40°C T_A (Note 1)	$I_{(AV)}$	4.0							A
Peak Forward Surge Current 8.3ms single half sine-wave Super Imposed on Rated Load	I_{FSM}	150							A
Maximum forward Voltage Drop Per Element at 4.0A Peak	V_F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking voltage	I_R	5.0							μA
Maximum Reverse Current at Rated DC Blocking voltage and 150°C T_A	I_R	1.0							mA
Operating Temperature Range T_J	T_J	-65 to +125							°C
Storage Temperature Range T_{STG}	T_{STG}	-65 to +150							°C

Note: 1. Mounting conditions, 0.5" lead length maximum.

KBL4005 THRU KBL410

SINGLE-PHASE BRIDGE RECTIFIER

REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 4.0 Ampere

RATING AND CHARACTERISTIC CURVES KBL4005 THRU KBL410

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

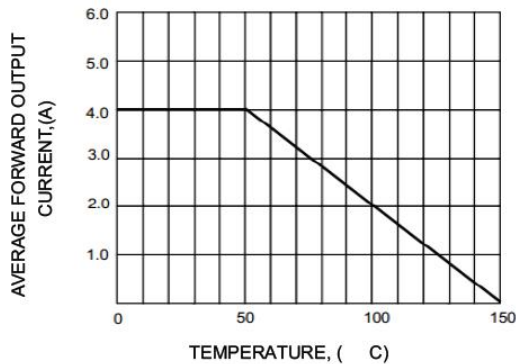


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER ELEMENT

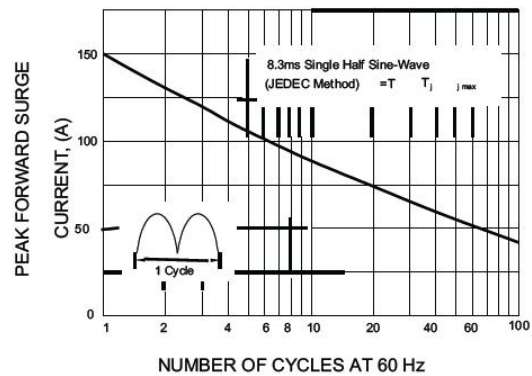


FIG.3-TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

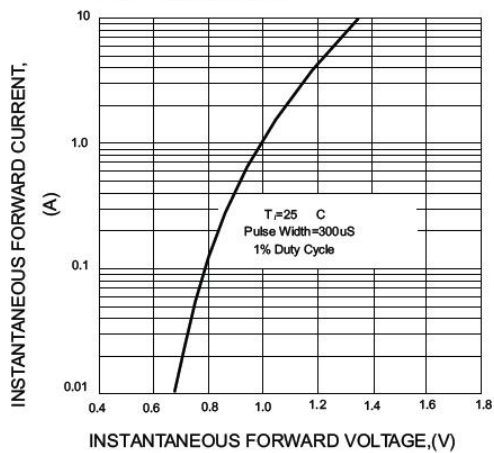


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT


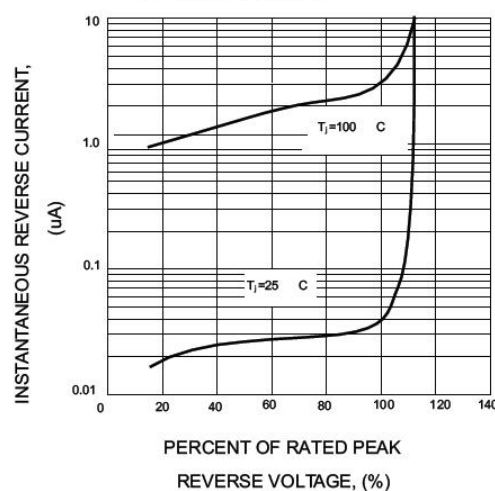


FIG.5-TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

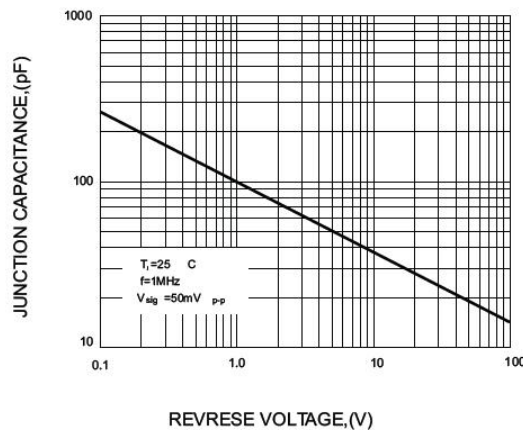

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.