


KBPC25005~KBPC2510

HIGH CURRENT SINGLE-PHASE SILICON BRIDGE RECTIFIERS
 REVERSE VOLTAGE: 50V to 1000V
 FORWARD CURRENT: 25A

KBPC

Features

- Surge overload 300 Amperes peak
- Low power loss, high efficiency
- Low reverse leakage current

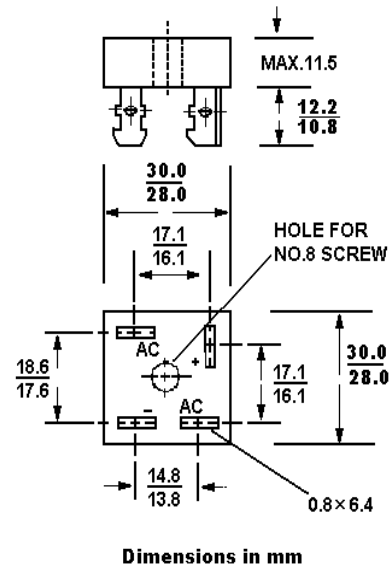


Absolute Maximum Ratings and Characteristics

Rating at 25°C ambient temperature unless otherwise specified. resistive or inductive load 60 Hz.,
 For capacitive load current by 20%.

Characteristic	KBPC 25005	KBPC 2501	KBPC 2502	KBPC 2504	KBPC 2506	KBPC 2508	KBPC 2510	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T _C = 55 °C	25							A
Peak Forward Surge Current, 8.3ms single half Sine-wave superimposed on rated load	300							A
Maximum Forward Voltage at 12.5A DC and 25?	1.2							V
Maximum Reverse Current at T _A = 25°C at Rated DC Blocking Voltage T _A = 125°C	10 1000							uA
Typical Junction Capacitance (Note 1)	300							pF
Typical Thermal Resistance (Note 2)	1.9							? /W
Operating Temperature Range T _J	-55 to +125							°C
Storage Temperature Range T _S	-55 to +150							°C

Notes: 1. Measured at 1 MHz and applied reverse voltage of 4.0VDC.

2. Thermal resistance from junction t case per leg.








®

РАДИОТЕХ


Тел.: (495) 795-0805
 Факс: (495) 234-1603
 Эл. почта: info@rct.ru
 Веб: www.rct.ru

RATINGS AND CHARACTERISTIC CURVES

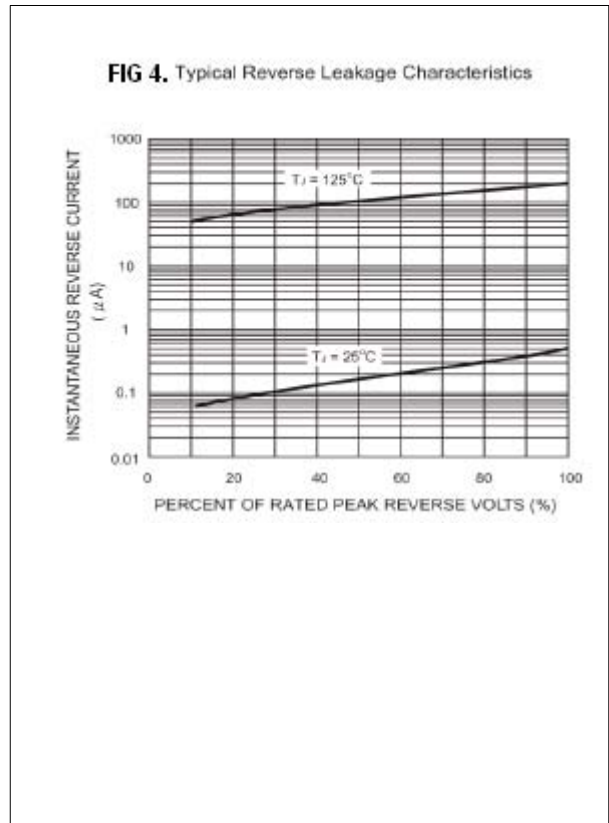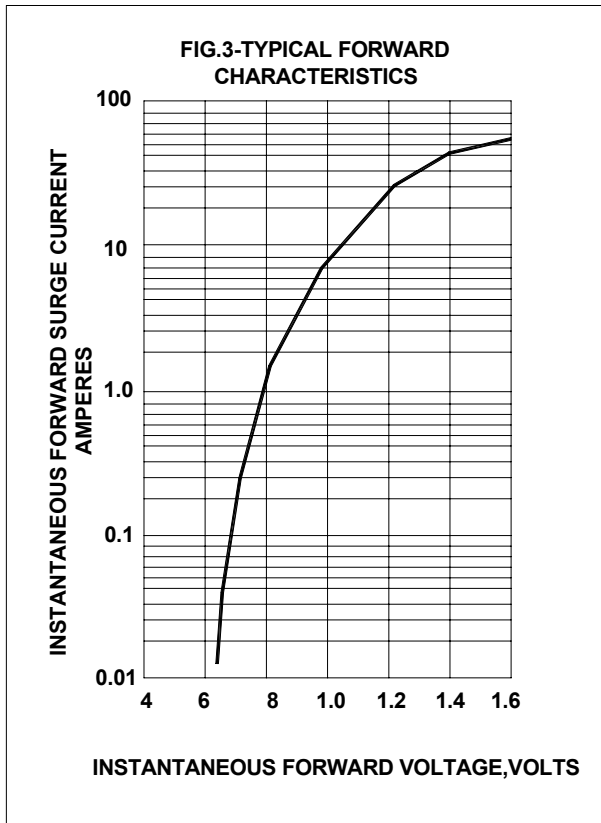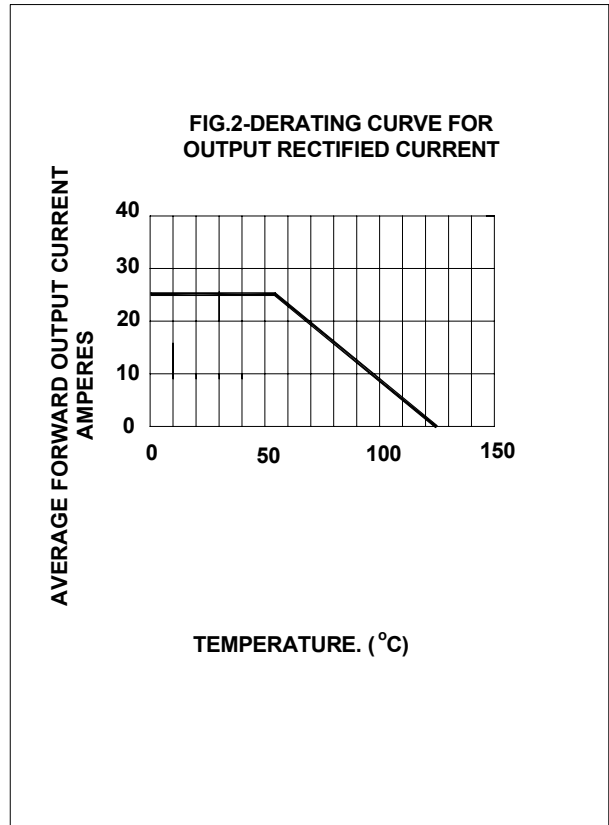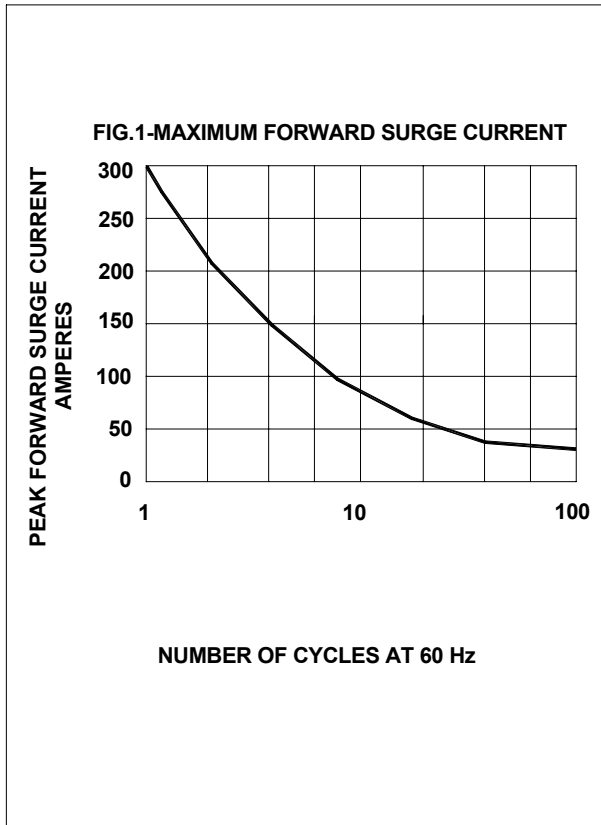

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001
Certificate No. 7116



ISO 9001 : 2000
Certificate No. 5529-1999-02-002-Int

Dated : 19/07/2005