

# KBPC300 THRU KBPC310


## 3.0A BRIDGE RECTIFIERS

### Features

- Diffused junction
- High current capability
- High case dielectric strength
- High surge current capability
- Ideal for printed circuit board application
- Plastic material has underwriters laboratory flammability classification 94V-O

### Mechanical Data

- Case: Molded Plastic
- Terminals: Plated leads solderable per MIL-STD-202, Method 208
- Polarity: Marked on body

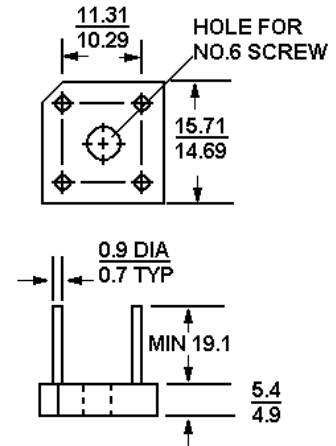

Dimensions in mm

### Absolute Maximum Ratings and Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load, For capacitive load, derate current by 20%.


	Symbols	KBPC 300	KBPC 301	KBPC 302	KBPC 304	KBPC 306	KBPC 308	KBPC 310	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Average rectified output current (note1) at $T_C = 50^\circ C$	$I_O$	3.0							A
Non-repetitive Peak forward surge current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50							A
Maximum instantaneous forward voltage drop per leg at 1.5A	$V_F$	1.2							V
Maximum DC reverse current at rated DC blocking voltage per leg	$I_R$	$T_C = 25^\circ C$							$\mu A$
		$T_C = 100^\circ C$							mA
Rating for fusing ( $t < 8.3ms$ )(note 2)	$I^2t$	10							$A^2s$
Typical junction capacitance(note3)	$C_j$	55							pF
Typical thermal resistance per leg (note 4)	$R_{\theta JC}$	25							K/W
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +125							$^\circ C$

Notes: 1. Mounted on metal chassis

2. Non-repetitive, for  $t > 1ms$  and  $< 8.3ms$

3. Measured at 1.0MHz and applied reverse voltage of 4.0V.DC

4. Thermal resistance junction to case per element




®

РАДИОТЕХ


Тел.: (495) 795-0805  
Факс: (495) 234-1603  
Эл. почта: info@rct.ru  
Веб: www.rct.ru

# KBPC300 THRU KBPC310


Forward Current Derating Curve

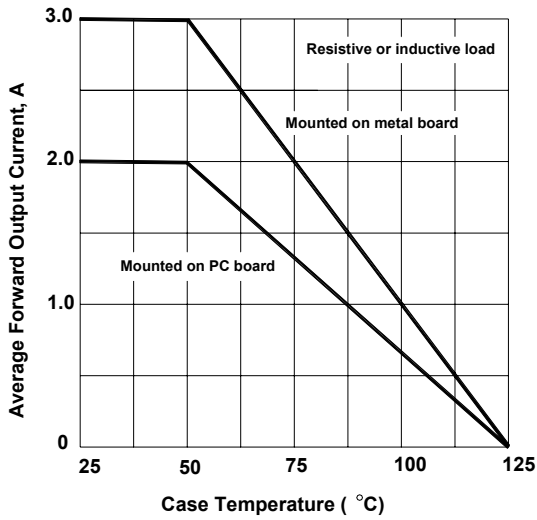



Typical Forward Characteristics, per element

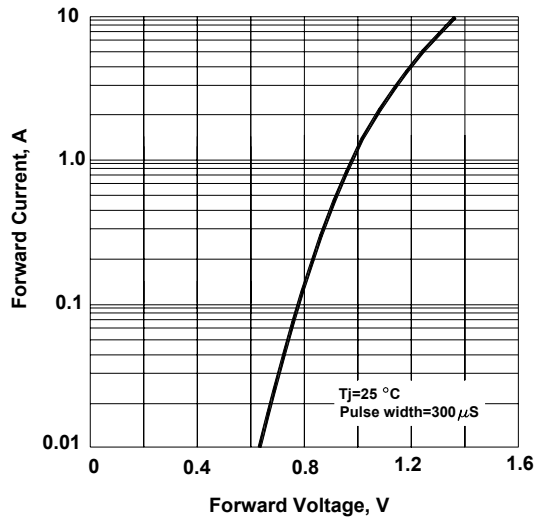

Max Non-repetitive Peak Forward Surge Current

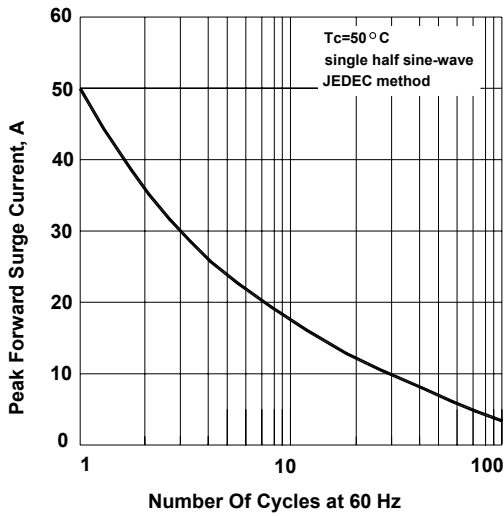


Typical Reverse Characteristics, per element

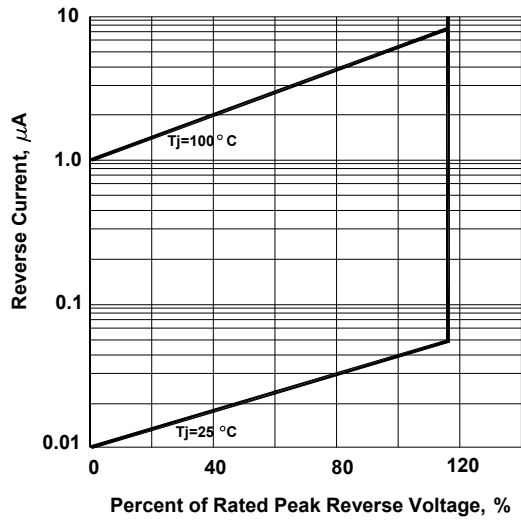

## SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002  
Certificate No. 05103



ISO 14001  
Certificate No. 7116



ISO 9001 : 2000  
Certificate No. 558-1999-02-02

Dated: 19/04/2003