


## Single-Phase Bridge Rectifier, 35A KBPC3506 Thru KBPC3512

### FEATURES

- UL recognition file number E320098 
- Universal 3-way terminals: snap-on, wire wrap-around, or PCB mounting
- High surge current capability
- Low thermal resistance
- Solder dip 260°C, 40s
- Compliant to RoHS



### TYPICAL APPLICATIONS

General purpose use in AC/DC bridge full wave rectification for power supply, home appliances, office equipment, industrial automation applications.

### MECHANICAL DATA

**Case:** KBPC, KBPC-W



Epoxy meets UL 94 V-O flammability rating

**Terminals:** Nickel plated on faston lugs or silver plated on wire leads, solderable per J-STD-002 and JESD22-B102. Suffix letter "W" added to indicate wire leads (e.g. KBPC3506W).

**Polarity:** As marked

**Mounting Torque:** 20 inches-lbs. max. (M5 screw)

**Weight:** 21g (0.74 ozs)

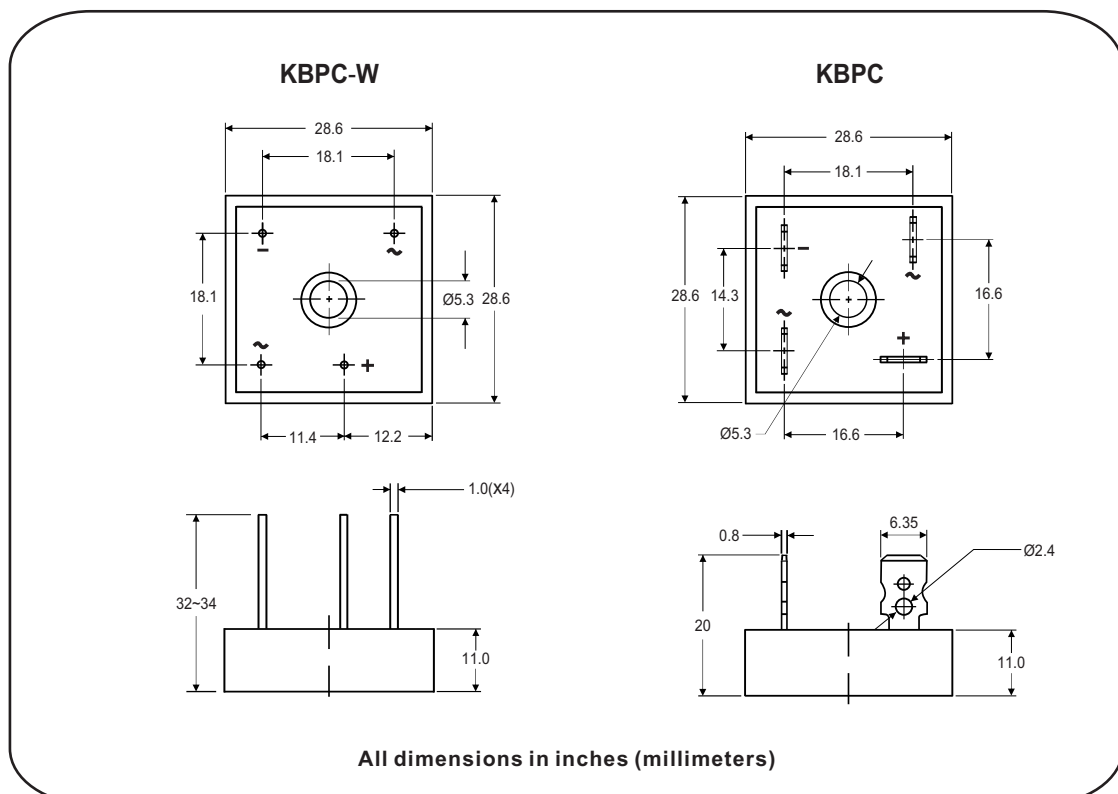

| PRIMARY CHARACTERISTICS |               |
|-------------------------|---------------|
| $I_{F(AV)}$             | 35A           |
| $V_{RRM}$               | 600V to 1200V |
| $I_{FSM}$               | 400A          |
| $I_R$                   | 5 $\mu$ A     |
| $V_F$                   | 1.1V          |
| $T_{J\ max.}$           | 150°C         |

| MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)               |             |            |     |      |      |                  |
|--|-------------|------------|-----|------|------|------------------|
| PARAMETER  | SYMBOL      | KBPC35     |     |      |      | UNIT             |
|  |             | 06         | 08  | 10   | 12   |                  |
| Maximum repetitive peak reverse voltage  | $V_{RRM}$   | 600        | 800 | 1000 | 1200 | V                |
| Maximum RMS voltage  | $V_{RMS}$   | 420        | 560 | 700  | 840  | V                |
| Maximum DC blocking voltage  | $V_{DC}$    | 600        | 800 | 1000 | 1200 | V                |
| Maximum average forward rectified output current (Fig.1)                         | $I_{F(AV)}$ | 35         |     |      |      | A                |
| Peak forward surge current single sine-wave superimposed on rated load           | $I_{FSM}$   | 400        |     |      |      | A                |
| Rating (non-repetitive, for t greater than 1 ms and less than 8.3 ms) for fusing | $I^2t$      | 660        |     |      |      | A <sup>2</sup> s |
| RMS isolation voltage from case to leads   | $V_{ISO}$   | 2500       |     |      |      | V                |
| Operating junction storage temperature range                                     | $T_J$       | -40 to 150 |     |      |      | °C               |
| Storage temperature range  | $T_{STG}$   | -25 to 125 |     |      |      | °C               |


| ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) |                           |        |        |    |    |    |         |
|---|---------------------------|--------|--------|----|----|----|---------|
| PARAMETER   | TEST CONDITIONS           | SYMBOL | KBPC35 |    |    |    | UNIT    |
|   |                           |        | 06     | 08 | 10 | 12 |         |
| Maximum instantaneous forward drop per diode                                  | $I_F = 17.5\text{A}$      | $V_F$  | 1.1    |    |    |    | V       |
| Maximum reverse DC current at rated DC blocking voltage per diode             | $T_A = 25^\circ\text{C}$  | $I_R$  | 5      |    |    |    | $\mu$ A |
|   | $T_A = 150^\circ\text{C}$ |        | 3000   |    |    |    |         |
| Typical junction capacitance per diode  | 4V, 1MHz                  | $C_J$  | 300    |    |    |    | pF      |

| THERMAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) |                       |        |    |    |    |      |
|--|-----------------------|--------|----|----|----|------|
| PARAMETER  | SYMBOL                | KBPC35 |    |    |    | UNIT |
|  |                       | 06     | 08 | 10 | 12 |      |
| Typical thermal resistance   | $R_{\theta JC}^{(1)}$ | 1.4    |    |    |    | °C/W |


## Notes

- (1) With heatsink
- (2) Bolt down on heatsink with silicone thermal compound between bridge and mounting surface for maximum heat transfer with M5 screw

**Fig.1 Maximum instantaneous forward voltage per leg**

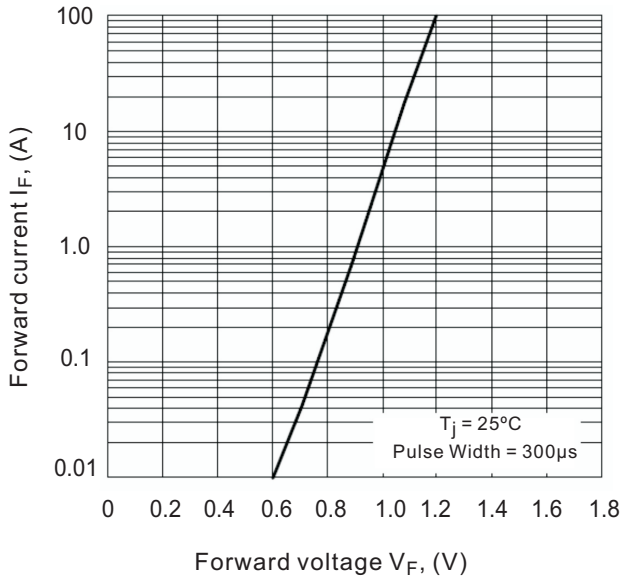

**Fig.2 Maximum output rectified current**

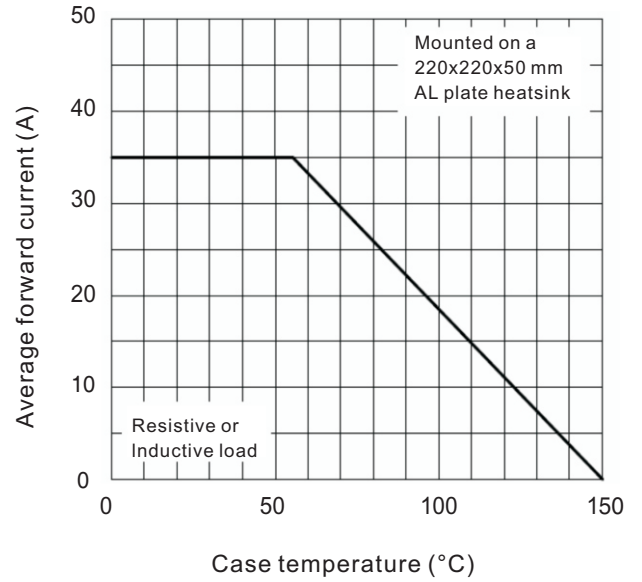

**Fig.3 Maximum non-repetitive peak-forward surge current per leg**

