



KBU1000G THRU KBU1010G

SINGLE PHASE 10 AMPS. GLASS PASSIVATED BRIDGE RECTIFIERS




FEATURES

- * High Surge Current Capability
- * Ideal for printed circuit board
- * Reliable low cost construction technique results in inexpensive product

VOLTAGE RANGE

50 to 1000 Volts
CURRENT
10.0 Amperes

KBU

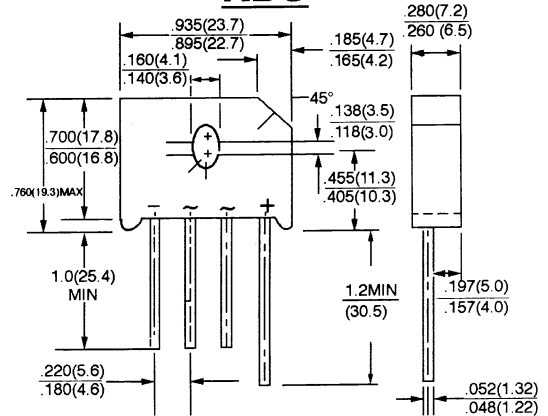

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	KBU 1000G	KBU 1001G	KBU 1002G	KBU 1004G	KBU 1006G	KBU 1008G	KBU 1010G	UNITS	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum D. C Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current @ $T_C = 75^\circ C^{(1,2)}$	$I_{F(AV)}$	10.0							A	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}					175				A
Maximum Forward Voltage Drop per element @ 5.0A	V_F					1.10				V
Maximum Reverse Current at Rated @ $T_A = 25^\circ C$ D. C. Blocking Voltage per element @ $T_A = 100^\circ C$	I_R					10 500				μA μA
Typical thermal resistance per leg (NOTE 2)	$R_{\theta JC}$					2.2				$^\circ C/W$
Operating Temperature Range	T_J					-55 to +150				$^\circ C$
Storage Temperature Range	T_{STG}					-55 to +150				$^\circ C$

NOTE:

- (1) Recommended mounted position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw
- (2) Units mounted on a 4.0 x 4.0 x 0.11" thick (10.2 x 10.2 x 0.3cm) Cu. Plate heatsink

RATINGS AND CHARACTERISTIC CURVES (KBU1000G THRU KBU1010G)

FIG.1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT - PER ELEMENT

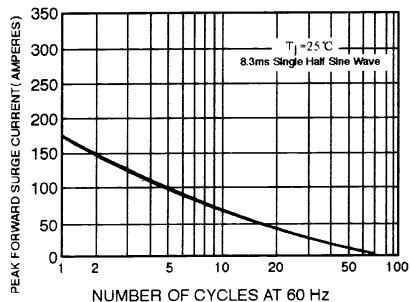


FIG.2 - TYPICAL FORWARD OUTPUT CURRENT DERATING CURVE

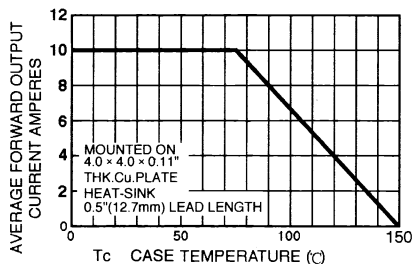


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS - PER ELEMENT

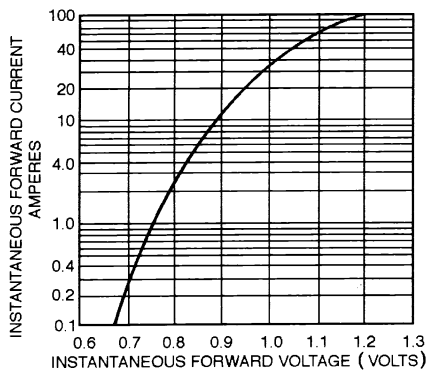


FIG.4 - TYPICAL REVERSE CHARACTERISTICS - PER ELEMENT

