

Silicon Bridge Rectifiers

KBU4005--KBU410

FEATURES

- Rating to 1000V PRV
- Surge overload rating to 150 Amperes peak
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead solderable per MIL-STD-202 method 208



Lead-free

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	KBU4005	KBU401	KBU402	KBU404	KBU406	KBU408	KBU410	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward Output current @T _A =50°C	I _{F(AV)}	4.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	150							A

Thermal Characteristics

Characteristic	Symbol	KBU4005	KBU401	KBU402	KBU404	KBU406	KBU408	KBU410	UNITS
Operating junction temperature range	T _J	- 55 ---- + 125							°C
Storage temperature range	T _{STG}	- 55 ---- + 150							°C

Electrical Characteristics (@T_A = 25°C unless otherwise specified)


Characteristic	Symbol	KBU4005	KBU401	KBU402	KBU404	KBU406	KBU408	KBU410	UNITS
Maximum instantaneous forward voltage @2.0A	V _F	1.0							V
Maximum reverse current @T _A =25 °C at rated DC blocking voltage @T _A =100°C	I _R	10.0 1.0							μ A mA



Silicon Bridge Rectifiers

KBU4005--KBU410

PACKAGE OUTLINE DIMENSIONS

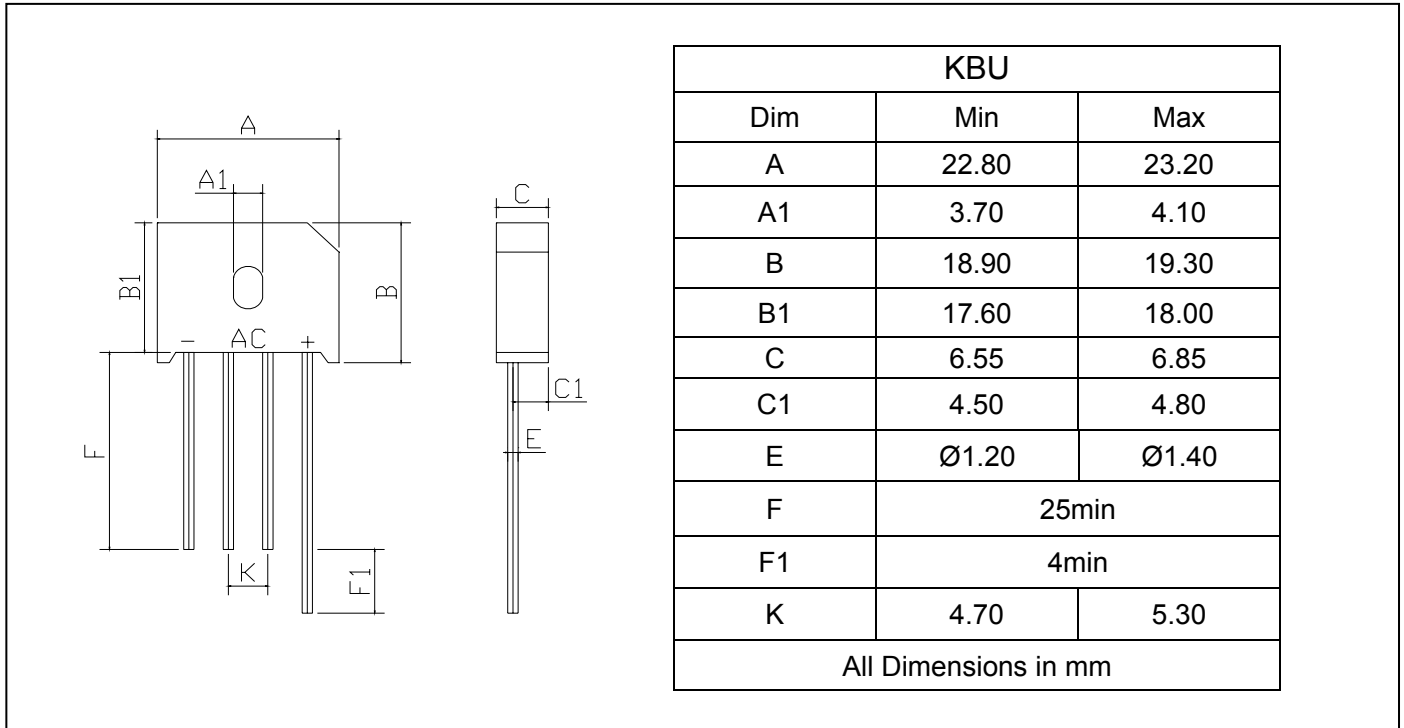

PACKAGE INFORMATION

Device	Package	Shipping
KBU4005--KBU410	KBU	400 Units/Box



Silicon Bridge Rectifiers

KBU4005--KBU410

FIG.1 – TYPICAL FORWARD CURRENT DERATING CURVE

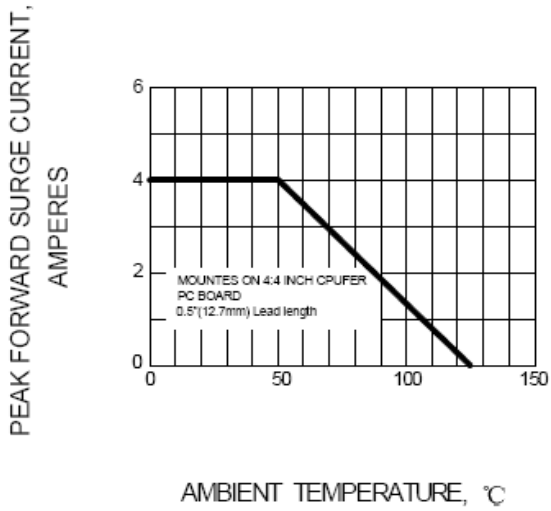


FIG.2 – MAXIMUM FORWARD SURGE CURRENT

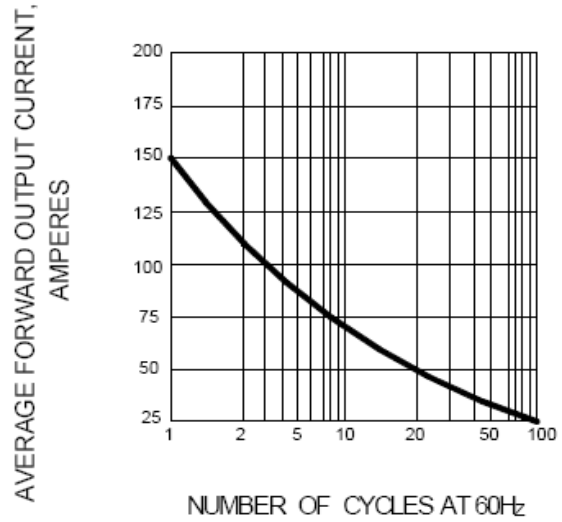


FIG.3 – TYPICAL FORWARD CHARACTERISTIC

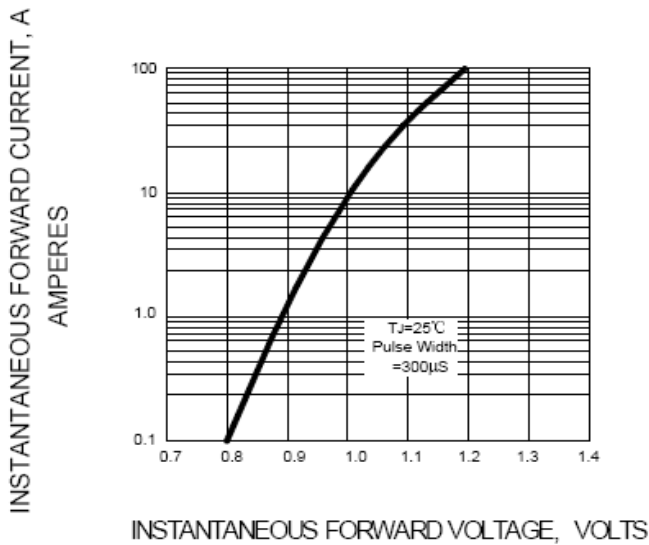


FIG.4 – TYPICAL REVERSE CHARACTERISTIC

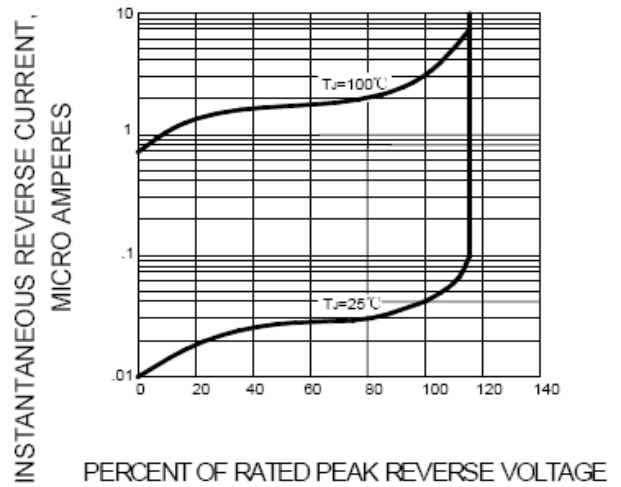


FIG.5 – TYPICAL JUNCTION CAPACITANCE PER ELEMENT

