

Possible Replacement GBU4A~GBU4M



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

KBU4A THRU KBU4M

Features

- Low Leakage and Low Forward Voltage
- Silver Plated Copper Leads
- Any Mounting Position
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Lead Free Finish/RoHS Compliant (NOTE 1) ("P" Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- UL Recognized File # E165989


Microsemi Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
KBU4A	KBU4A	50V	35V	50V
KBU4B	KBU4B	100V	70V	100V
KBU4D	KBU4D	200V	140V	200V
KBU4G	KBU4G	400V	280V	400V
KBU4J	KBU4J	600V	420V	600V
KBU4K	KBU4K	800V	560V	800V
KBU4M	KBU4M	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	4 A	$T_C = 100^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	150A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element	V_F	1.0V	$I_{FM} = 2.0A$; $T_J = 25^\circ\text{C}$ (Note 2)
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	10 μ A 100mA	$T_A = 25^\circ\text{C}$ $T_C = 100^\circ\text{C}$

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7
2. Pulse Test: Pulse Width 300 μ sec, Duty Cycle 1%

4 Amp Single Phase Bridge Rectifier 50 to 1000 Volts

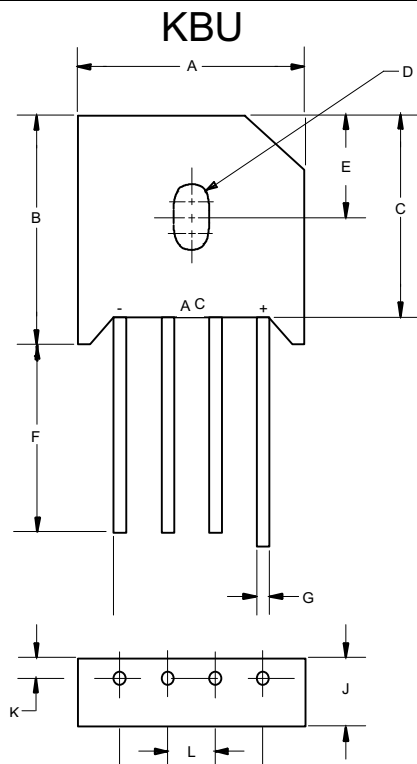

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.895	.935	22.7	23.7	
B	.600	.700	16.8	17.8	
C	.740	.780	18.8	19.8	NOM
D	.15 $\varnothing$ x .23L		3.8 $\varnothing$ x 5.7L		HOLE
E	---	.300	---	7.5	NOM
F	.100	---	25.4	---	
G	.048	.052	1.2	1.3	
H	.268	.280	6.8	7.1	
K	---	.140	---	5.3	NOM
L	.180	.220	4.6	5.6	3PL

Possible Replacement GBU4A~GBU4M



KBU4A thru KBU4M

Figure 1
Typical Forward Characteristics

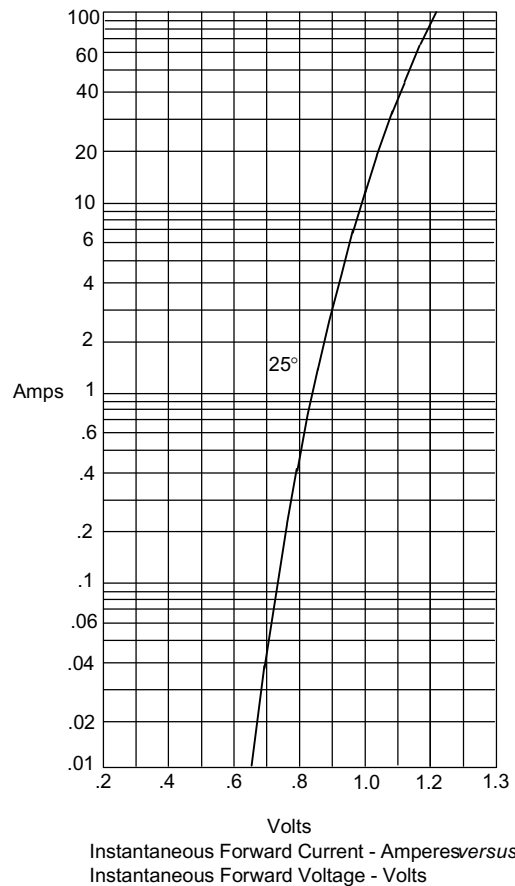


Figure 2
Typical Reverse Characteristics


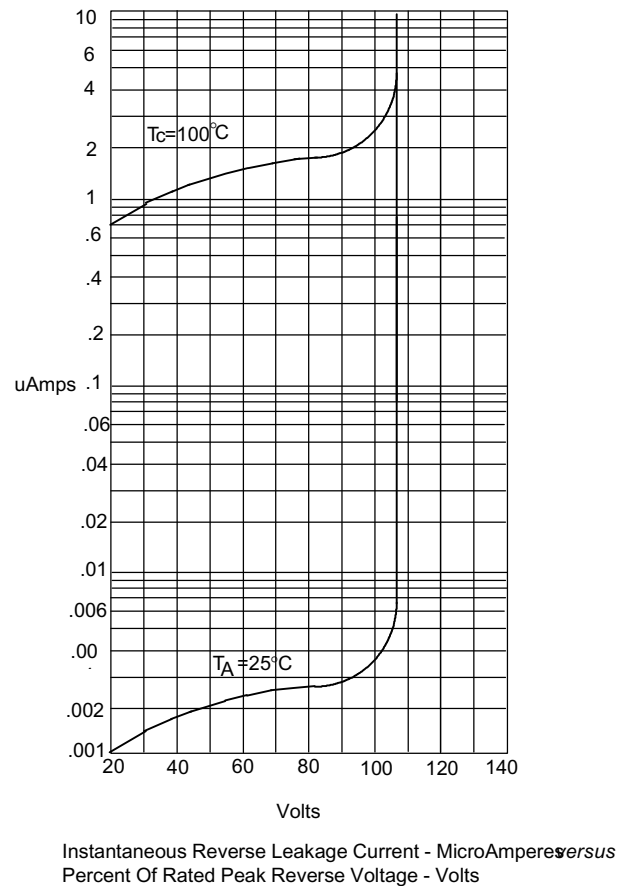


Figure 3
Forward Derating Curve



Possible Replacement GBU4A~GBU4M

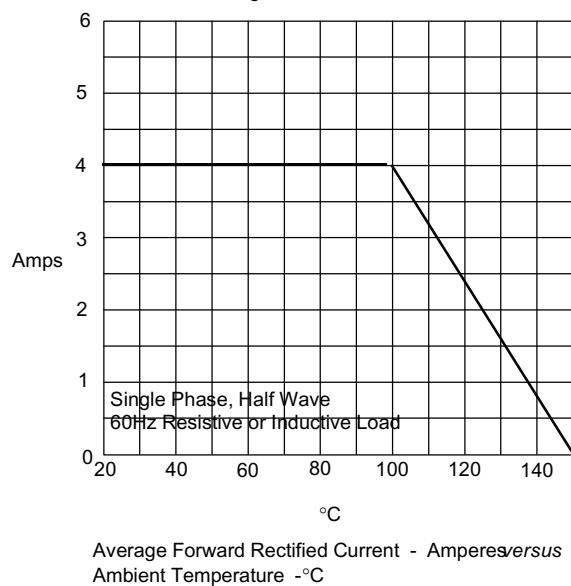

Ordering Information

Device	Packing
(Part Number)-BP	Bulk;15pcs/Tube

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.