



# KBU801 - KBU807

## Single Phase 8.0AMPS. Bridge Rectifiers


### KBU

### Features

- ✧ UL Recognized File #E-326243
- ✧ Ideal for printed circuit board
- ✧ High case dielectric strength
- ✧ Plastic material has Underwriters Laboratory flammability Classification 94V-0
- ✧ Typical IR less than 0.1uA
- ✧ High surge current capability
- ✧ High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs.,(2.3kg) tension
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode


### Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Pure tin plated, lead free, leads solderable per MIL-STD-202, Method 208
- ✧ Weight: 8.0 grams
- ✧ Mounting Torque: 5 in lbs max.

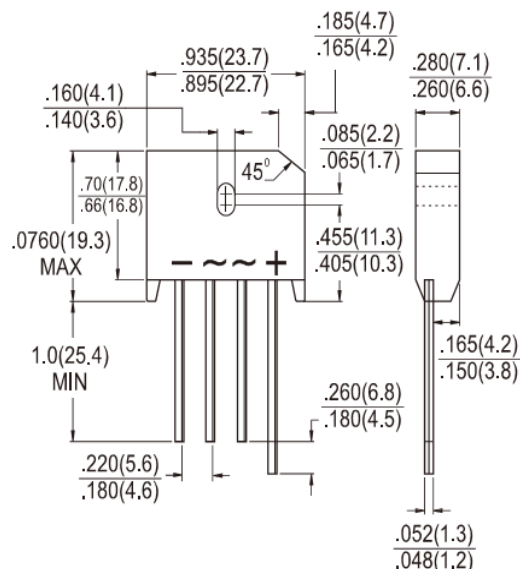

### Dimensions in inches and (millimeters)

#### Marking Diagram



- KBU80X = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

### Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	KBU 801	KBU 802	KBU 803	KBU 804	KBU 805	KBU 806	KBU 807	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_A=65^\circ C$	$I_{F(AV)}$	8							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	300							A
Rating of fusing (t<8.3mS)	$I^2t$	373							A <sup>2</sup> S
Maximum Instantaneous Forward Voltage (Note 1) @ 4 A @ 8 A	$V_F$	1.0 1.1							V
Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Blocking Voltage @ $T_A=125^\circ C$	$I_R$	10 500							uA
Typical Junction Capacitance per leg (Note 2)	Cj	400							pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$ $R_{\theta JC}$	18 3							°C/W
Operating Temperature Range	$T_J$	- 55 to + 125							°C
Storage Temperature Range	$T_{STG}$	- 55 to + 150							°C

Note 1 : Pulse Test with PW=300u sec, 1% Duty Cycle

Note 2 : Measured at 1MHz and applied Reverse bias of 4.0V D.C.

Note 3 : Unit case mounted on 4" x 6" x 0.25" Al plate heat sink.

## RATINGS AND CHARACTERISTIC CURVES (KBU801 THRU KBU807)

FIG.1 MAXIMUM DERATING CURVE FOR OUTPUT CURRENT

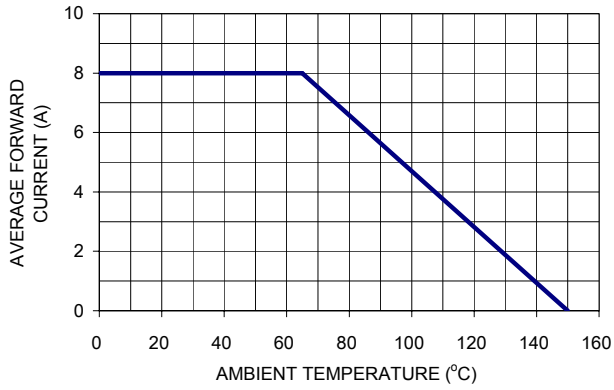


FIG. 2 MAXIMUM FORWARD SURGE CURRENT PER LEG

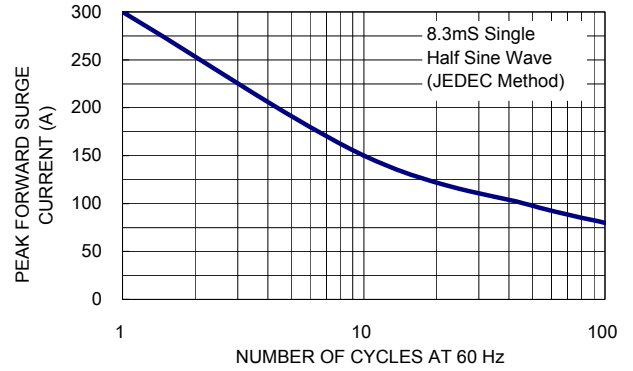


FIG. 3 TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

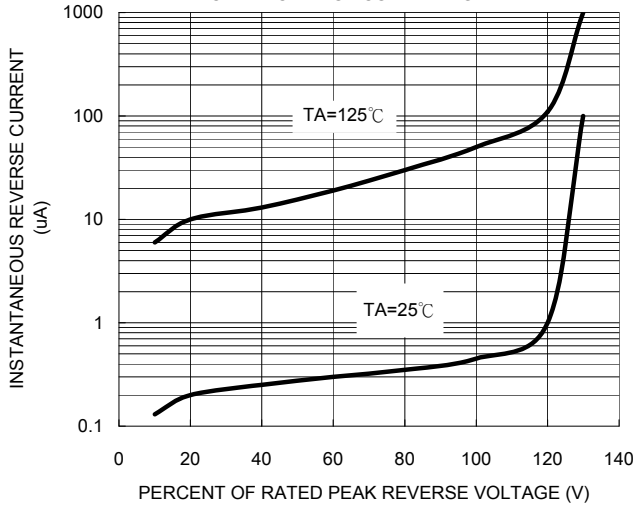


FIG. 4 TYPICAL FORWARD CHARACTERISTICS PER LEG

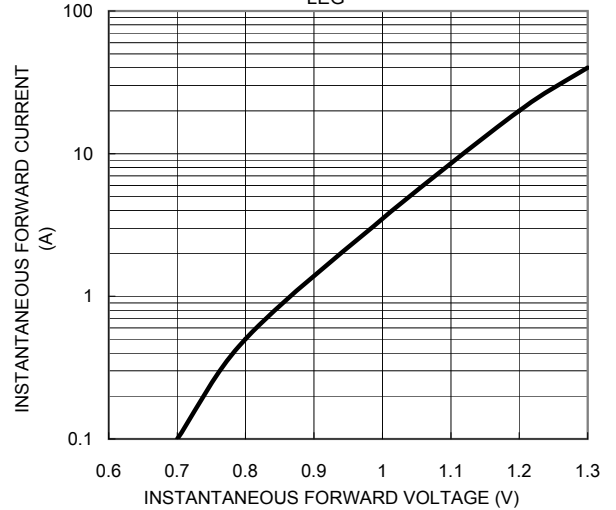


FIG. 5 TYPICAL JUNCTION CAPACITANCE

