
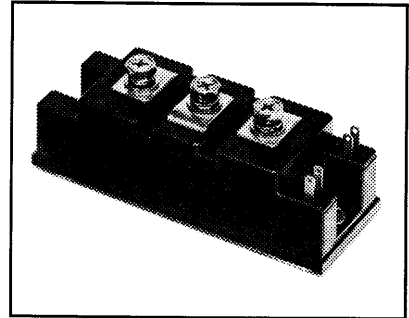


### Dual Darlington Transistor Module 75 Amperes/600 Volts

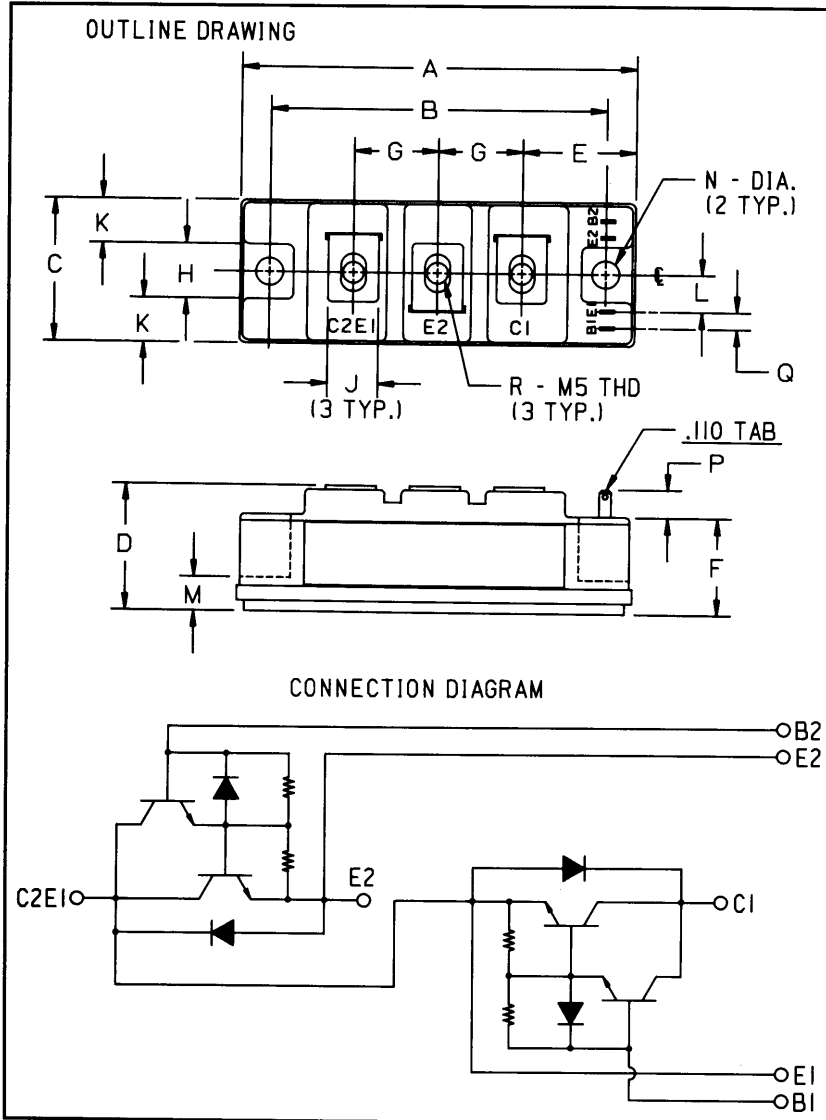

#### Description:

The Powerex Dual Darlington Transistor Modules are high power devices designed for use in switching applications. The modules are isolated, consisting of two Darlington Transistors with each transistor having a reverse parallel connected high-speed diode.

#### Features:

- Isolated Mounting
- Planar Chips
- Discrete Fast Recovery Feedback Diode
- High Gain ( $h_{FE}$ )
- Quick Connect Base-Emitter Signal Terminals
- Base-Emitter Speed-up Diodes

#### Applications:

- AC Motor Control
- DC Motor Control
- Switching Power Supplies
- Inverters

#### Ordering Information:

Example: Select the complete eight digit module part number you desire from the table - i.e. KD224575 is a 450  $V_{CEO(sus)}$  (600  $V_{CEV}$ ), 75 Ampere Dual Darlington Module.

Outline Drawing

Dimensions	Inches	Millimeters
A	3.701 Max.	94 Max.
B	3.150 ± 0.010	80 ± 0.25
C	1.339 Max.	34 Max.
D	1.181 Max.	30 Max.
E	1.063	27
F	0.906	23
G	0.787	20
H	0.512	13

Dimensions	Inches	Millimeters
J	0.472	12
K	0.413	10.5
L	0.344	8.75
M	0.315	8
N	0.256 Dia.	6.5 Dia.
P	0.256 Min.	6.5 Min.
Q	0.157	4
R	M5 Metric	M5

Type	$V_{CEO(sus)}$ Volts (X 10)	Current Rating Amperes (75)
KD22	45	75



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KD224575**  
**Dual Darlington Transistor Module**  
 75 Amperes/600 Volts

**Absolute Maximum Ratings,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Ratings	Symbol	KD224575	Units
Junction Temperature	$T_j$	-40 to 150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to 125	$^\circ\text{C}$
Collector-Emitter Sustaining Voltage	$V_{CEO(sus)}$	450	Volts
Collector-Emitter Sustaining Voltage, $V_{BE} = -2\text{V}$	$V_{CEV(sus)}$	600	Volts
Collector-Base Voltage	$V_{CBO}$	600	Volts
Emitter-Base Voltage	$V_{EBO}$	7	Volts
Collector-Emitter Voltage, $V_{BE} = -2\text{V}$	$V_{CEV}$	600	Volts
Continuous Collector Current	$I_C$	75	Amperes
Diode Forward Current	$I_{FM}$	75	Amperes
Continuous Base Current	$I_B$	4.5	Amperes
Diode Surge Current	$I_{FSM}$	750	Amperes
Power Dissipation (Each Transistor)	$P_t$	350	Watts
Max. Mounting Torque M5 Terminal Screws	—	17	in.-lb.
Max. Mounting Torque M6 Mounting Screws	—	26	in.-lb.
Module Weight (Typical)	—	210	Grams
V Isolation	$V_{RMS}$	2000	Volts

**Electrical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units	
Collector Cutoff Current	$I_{CEV}$	$V_{CE} = 600\text{V}, V_{BE} = -2\text{V}$	—	—	1	mA	
		$V_{CE} = 600\text{V}, V_{BE} = -2\text{V}, T_C = 125^\circ\text{C}$	—	—	5	mA	
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = 7\text{V}$	—	—	200	mA	
DC Current Gain	$h_{FE}$	$I_C = 75\text{A}, V_{CE} = 2\text{V}$	75	—	—	—	
		$I_C = 75\text{A}, V_{CE} = 5\text{V}$	100	—	—	—	
Diode Forward Voltage	$V_{FM}$	$I_{FM} = 75\text{A}$	—	—	1.85	Volts	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 75\text{A}, I_B = 1\text{A}$	—	—	2.0	Volts	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 75\text{A}, I_B = 1\text{A}$	—	—	2.5	Volts	
Resistive	Turn-on	$t_{on}$	$V_{CC} = 300\text{V}$	—	—	2.5	$\mu\text{s}$
Load	Storage Time	$t_s$	$I_C = 75\text{A}$	—	—	12	$\mu\text{s}$
Switch Times	Fall Time	$t_f$	$I_{B1} = 1.5\text{A}, I_{B2} = -1.5\text{A}$	—	—	3.0	$\mu\text{s}$










**Thermal and Mechanical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Case-to-Sink	$R_{\theta(c-s)}$	Per 1/2 Module	—	—	0.15	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Transistor Part	—	—	0.35	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Diode Part	—	—	1.3	$^\circ\text{C/W}$



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KD224575**  
**Dual Darlington Transistor Module**  
**75 Amperes/600 Volts**

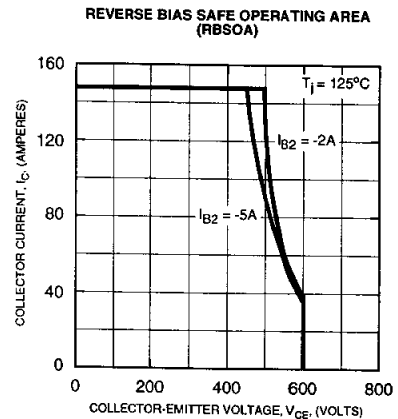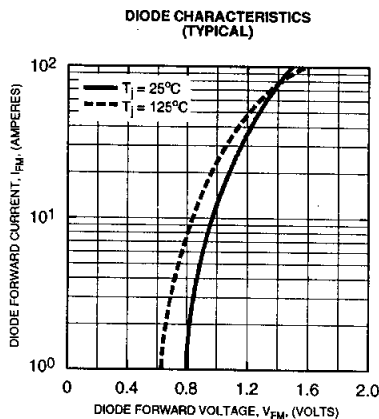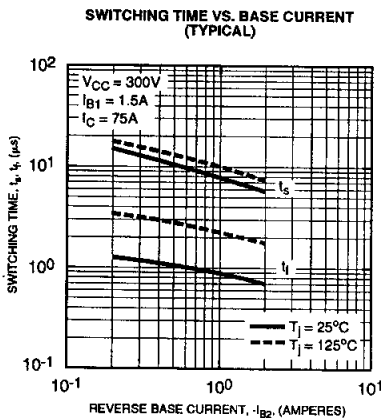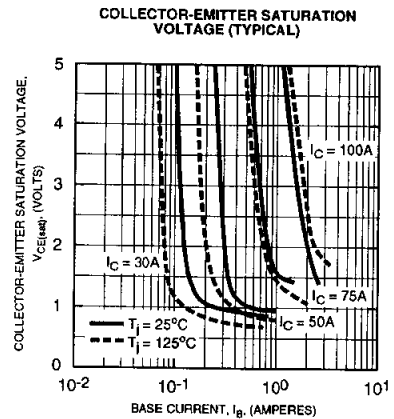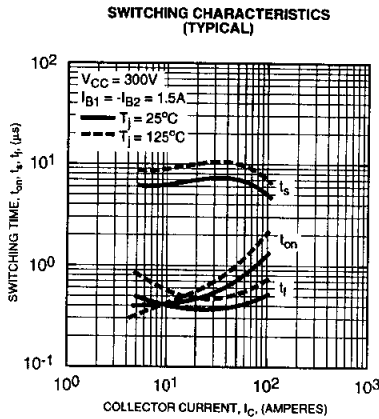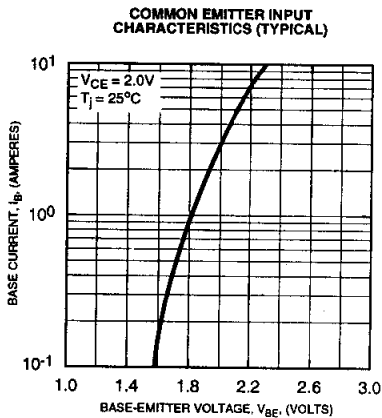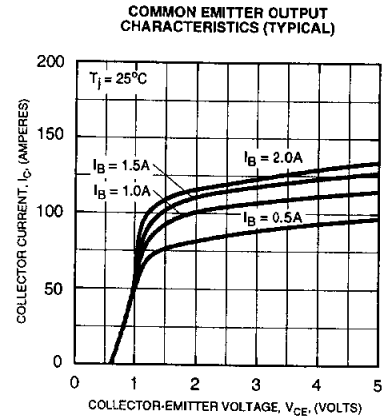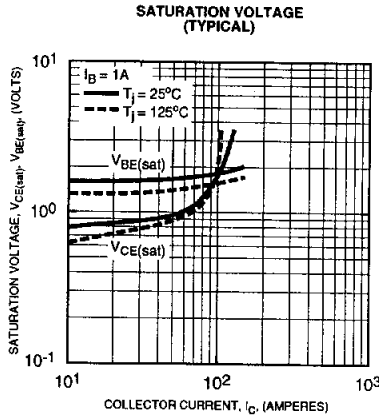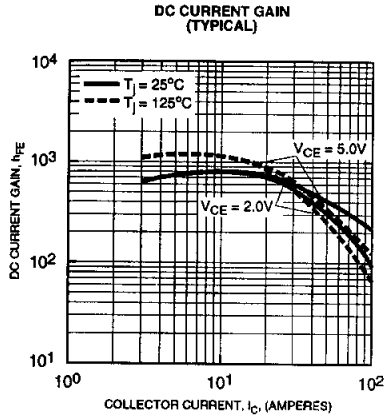

**KD224575**  
**Dual Darlington Transistor Module**  
 75 Amperes/600 Volts

