


RoHS

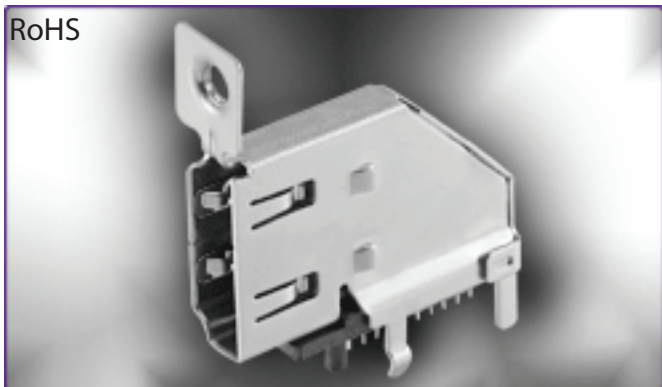

KDMIX-SL Series

HDMI™ SLIM UPRIGHT Through Hole Shield Flange With Spring

Features

- Metal shields provide better ESD protection
- 19 position receptacle
- Panel mount flange adds mechanical stability and
- Provides additional grounding
- Saves board space

Performance Specifications

Materials and Finish

Insulator : LCP,UL94V-0 Rated Thermoplastic,Color-Black

Contacts : Brass

Plating : 15µ" Gold plated over Nickel in contact area, matte tin plated in solder area.

Shell : Stainless Steel Solderable Nickel plated

Electrical Characteristics

Rated Voltage : 0.5A

Insulation Resistance : more than 100 Megohms at 500V DC

Dielectric Withstanding : 500V for 1 minute

Operating Temperature : -40°C to 105°C

KDMIX

KDMIX Series

Documentation & Ordering Information

Kycon Part #

Part Number Builder

Series	Shield Option	Spring Option	Insulator Option	Plating Option
Series KDMIX-SL - HDMI™ Slim	Shield Option FS - Through Hole Shield Tabs,Flange	Spring Option WS - With Spring	Insulator Option B - Black	Plating Option 15 - 15µ" Gold

KDMIX-SL Series Dimensions

Dimensions in mm

