

ULTRA HIGH SPEED SWITCHING APPLICATION.


FEATURES

- Small Package : ESM.
- Low Forward Voltage : $V_F=1.0V$ (Max.).


MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Maximum (Peak) Reverse Voltage	V_{RM}	20	V
Reverse Voltage	V_R	20	V
Maximum (Peak) Forward Current	I_{FM}	200 *	mA
Average Forward Current	I_O	100 *	mA
Surge Current (1 μ s)	I_{FSM}	300 *	mA
Power Dissipation	P_D	100	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

Note : * Unit Rating. Total Rating=Unit Rating x 0.7

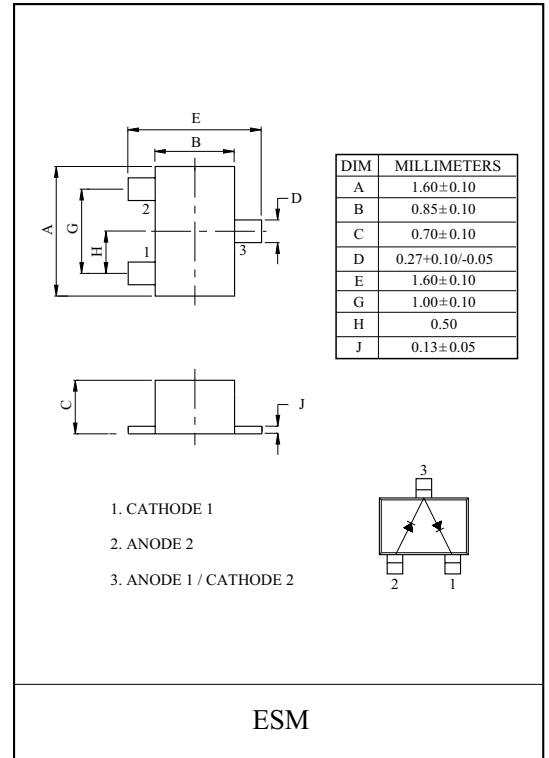

Marking



ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	V_F	$I_F=10mA$	-	-	1.0	V
Reverse Current	I_R	$V_R=15V$	-	-	0.1	μA

KDS142E

