


For antenna switches in mobile applications.

### FEATURES


- Low Operation Current.
- Small Package .

### MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	$V_R$	30	V
Forward Current	$I_F$	100	mA
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-55 ~ 150	°C

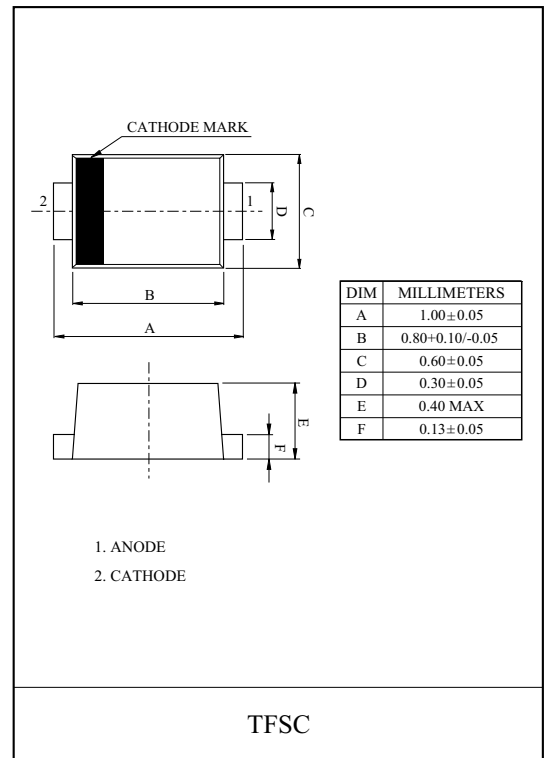

### Marking



### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Current	$I_R$	$V_R=30V$	-	-	0.1	μA
Forward Voltage	$V_F$	$I_F=2mA$	-	-	0.9	V
Total Capacitance	$C_T$	$V_R=1V, f=1MHz$	-	-	0.43	pF
Series Resistance	$r_s$	$I_F=2mA, f=100MHz$	-	-	1.8	Ω
ESD-Capability *	-	C=200pF, R=0 Ω, Both forward and reverse direction 1 pulse	100	-	-	V

\* Failure criterion :  $I_R > 100nA$  at  $V_R = 30V$ .

# KDV143F

