


VCO FOR UHF/VHF BAND.

FEATURES

- High Capacitance Ratio : $C_{1V}/C_{4V} = 2.0$ (Typ.)
- Low Series Resistance : $r_s = 0.39$ (Typ.)


MAXIMUM RATING (Ta=25)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|---------------------------|-----------|---------|------|
| Reverse Voltage | V_R | 10 | V |
| Junction Temperature | T_j | 150 | |
| Storage Temperature Range | T_{stg} | -55 150 | |

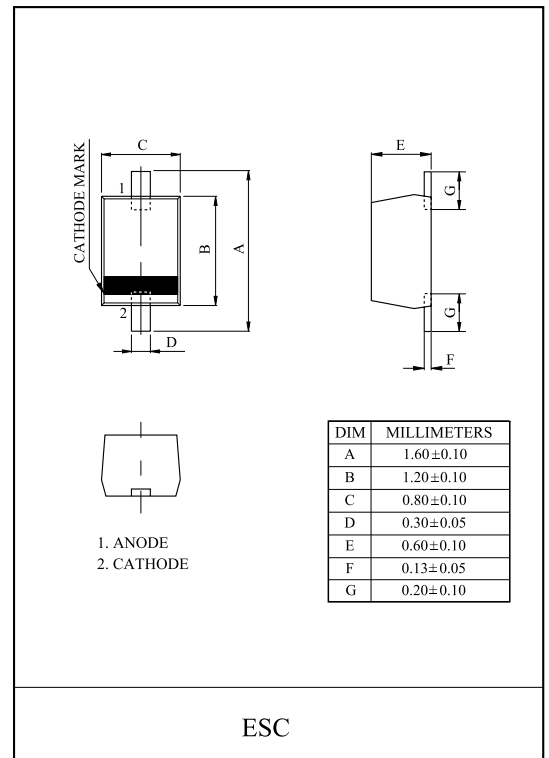


ELECTRICAL CHARACTERISTICS (Ta=25)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-------------------|----------|------------------------|------|------|------|------|
| Reverse Voltage | V_R | $I_R = 1 \mu A$ | 10 | - | - | V |
| Reverse Current | I_R | $V_R = 10V$ | - | - | 10 | nA |
| Capacitance | C_{1V} | $V_R = 1V, f = 1MHz$ | 15 | 16 | 17 | pF |
| | C_{4V} | $V_R = 4V, f = 1MHz$ | 7.3 | 8.0 | 8.7 | |
| Capacitance Ratio | K | - | 1.8 | 2.0 | - | |
| Series Resistance | r_s | $V_R = 1V, f = 470MHz$ | - | 0.39 | 0.5 | |

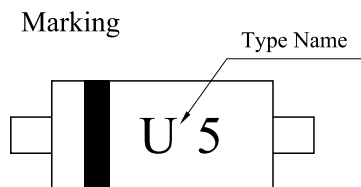


KDV273E


$C_T - V_R$

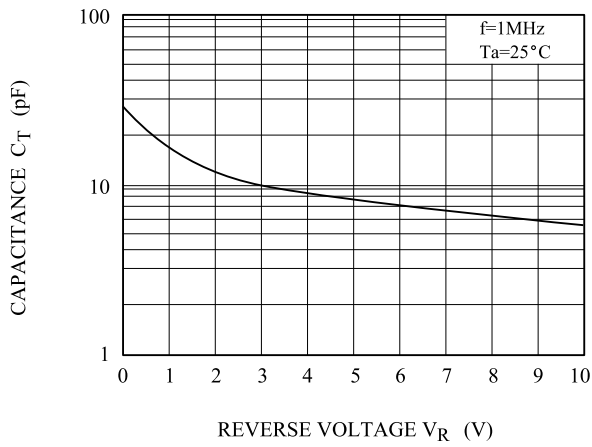


$I_R - V_R$

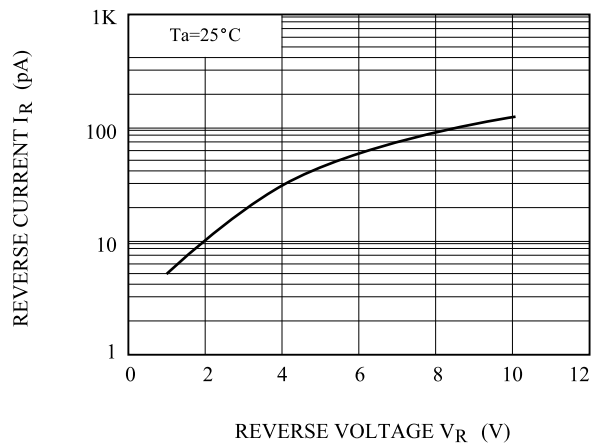


$r_s - V_R$

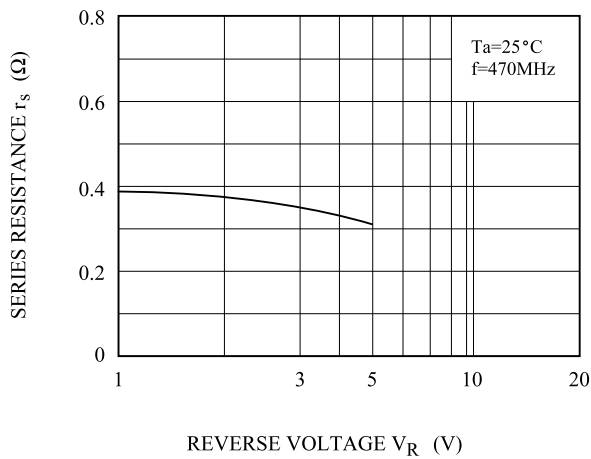

$r_s - f$

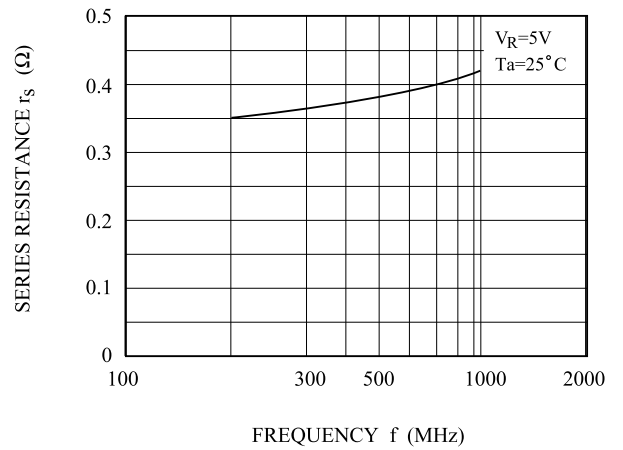

$\delta C - T_a$

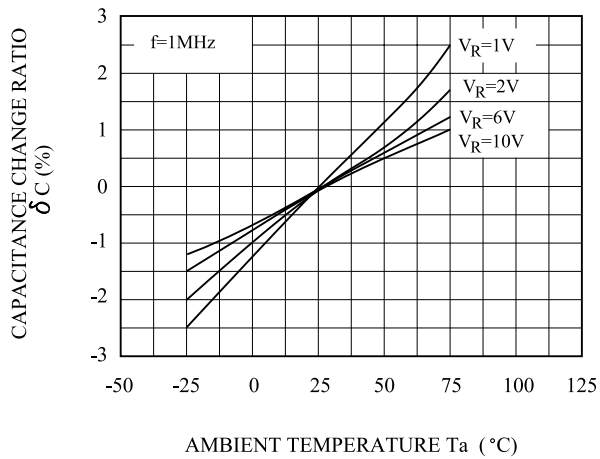

NOTE : $\delta C(\%) = \frac{C(T_a) - C(25)}{C(25)} \times 100$