

TUNING OF SEPERATE RESONANT CIRCUIT, PUSH-PULL CIRCUIT IN FM RANGE, ESPECIALLY FOR CAR AUDIO.

FEATURES


- Low Series Resistance : $r_s=0.3(\text{TYP.})$.
- Small Package : SOT-23.

MAXIMUM RATING (Ta=25)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	V_R	15	V
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

CLASSIFICATION OF CAPACITANCE RATIO GRADE

GRADE	CAPACITANCE(C_{2V})	UNIT
B	43 44.5	pF
C	44 45.5	

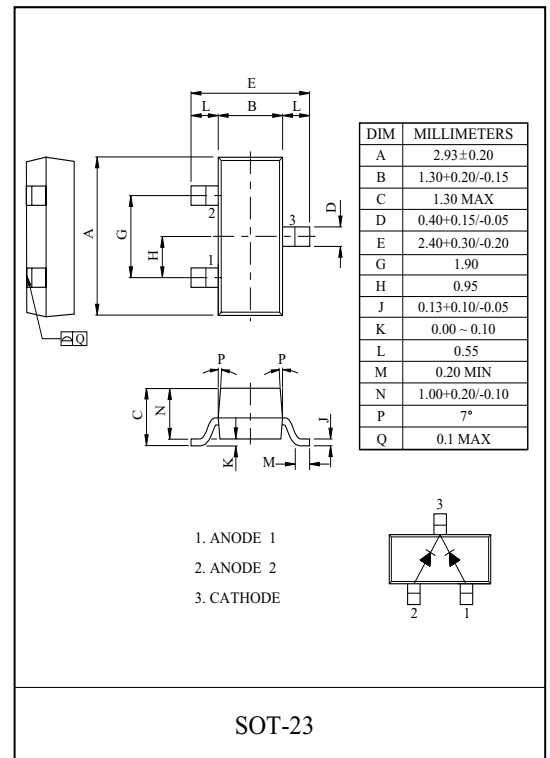

Marking

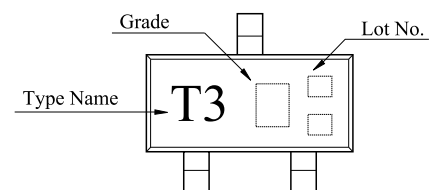


ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Voltage	V_R	$I_R=10 \mu\text{A}$	15	-	-	V
Reverse Current	I_R	$V_R=15\text{V}$	-	-	50	nA
Capacitance	C_{2V}	$V_R=2\text{V}, f=1\text{MHz}$	43	-	45.5	pF
	C_{8V}	$V_R=8\text{V}, f=1\text{MHz}$	24	-	28.8	
Capacitance Ratio	C_{2V}/C_{8V}		1.74	-	1.85	
Series Resistance	r_s	$C=38\text{pF}, f=100\text{MHz}$	-	0.3	0.4	

KDV804KS

C - V_R

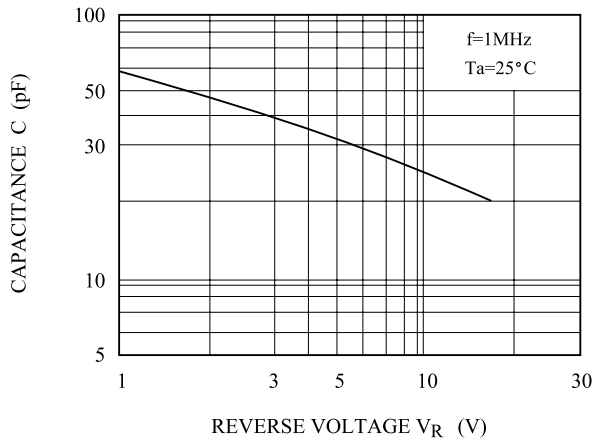

Q - V_R

