



**DATA SHEET**

---

O K I G a A s P R O D U C T S

**KGL4203**  
**10-Gbps EXOR/NOR IC**  
**0.2 $\mu$ m Gate Length GaAs MESFET Technology**

---

**February 2000**



**Oki Semiconductor**



# Oki Semiconductor

---

## KGL4203

---

### 10-Gbps GaAs EXOR/NOR IC

---

#### INTRODUCTION

Oki Semiconductor's KGL4203 is a 10-Gbps GaAs EXOR/NOR IC designed for ultra high-speed digital communications systems. The KGL4203 uses 0.2- $\mu\text{m}$  gate length GaAs MESFETs and Oki's unique DCFL ( Direct Coupled FET Logic ) technology to achieve operations of 10-GHz or more. The KGL4203 is available as a 24-pin ceramic packaged device. Due to the KGL4203's high sensitivity, capacitive coupling is recommended for the interface.


#### FEATURES

- High-speed operation: 10-Gbps data rate (min)
- High sensitivity: 50 to 600 mV<sub>PP</sub> (at 10 Gbps  $2^{23}$  -1 PRPS, capacitive coupling)
- Low-power dissipation: 540 mW (typ.) using 2-V power-supply
- 0.2- $\mu\text{m}$  gate length GaAs MESFET process
- DCFL (Direct Coupled FET Logic) technology
- 24-pin ceramic package

#### APPLICATION

- High-speed optical communication systems: 10 Gbps
- High-speed test equipment

## BLOCK DIAGRAM

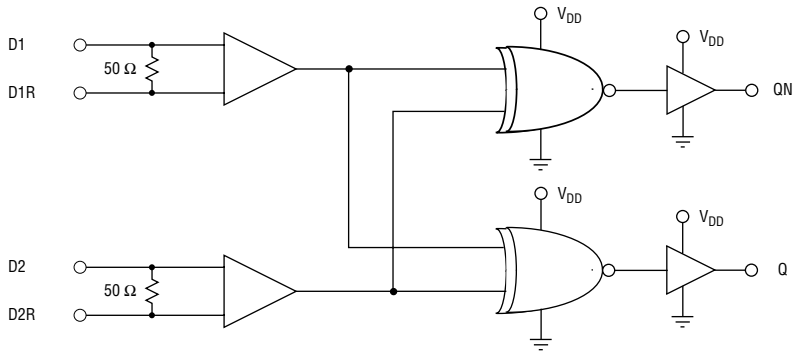

D1, D2      Data Input Terminals  
 D1R, D2R    Reference Voltage Terminals. Usually D1R and D2R are connected to ground through a capacitor (0.1  $\mu$ F).  
 Q, QN      Complementary Data Outputs  
 VDD        Power Supply of Internal Circuit

## ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Supply Voltage	$V_{DD}$	-0.3	2.3	V
Data Input Voltage ( D1, D2 )	$V_{DI}$	-0.3	1.5	V
Temperature at Package Base Under Bias	$T_s$	-45	100	$^{\circ}$ C
Storage Temperature	$T_{st}$	-45	125	$^{\circ}$ C

Exceeding these maximum ratings could cause immediate damage or lead to permanent deterioration of the device.


### Electrical Characteristics

$V_{DD} = 2 V \pm 0.1 V$ ,  $T_s = 0^{\circ}C$  to  $70^{\circ}C$

Parameter	Symbol	Min.	Typ.	Max.	Units
Maximum Operating Data Bit Rate	DAR	10			Gbps
Power Dissipation	PW		0.54	0.68	W
Data Input Voltage Swing ( D1, D2 )	$D_{IS}$	0.5		0.9	$V_{pp}$
Data Output Voltage Swing ( Q, QN )	$D_{OS}$	0.8	1.0	1.2	$V_{pp}$
Output ( Q, QN ) Rise Time and Fall Time	$T_{RF}$		30	40	ps

## PACKAGE DIMENSIONS

(Units: mm)

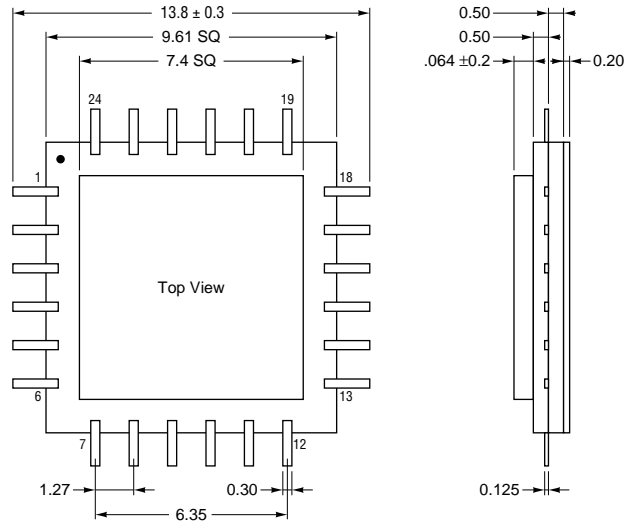

Dimension in mm.

## Pin Configuration

Pin No.	Description	Pin No.	Description	Pin No.	Description	Pin No.	Description
1	GND	7	GND	13	GND	19	D2R
2	Q	8	GND	14	D1	20	VDD
3	GND	9	GND	15	GND	21	VDD
4	GND	10	GND	16	GND	22	GND
5	QN	11	GND	17	D2	23	VDD
6	GND	12	D1R	18	GND	24	GND

Notes:

---

The information contained herein can change without notice owing to product and/or technical improvements.

Please make sure before using the product that the information you are referring to is up-to-date.

The outline of action and examples of application circuits described herein have been chosen as an explanation of the standard action and performance of the product. When you actually plan to use the product, please ensure that the outside conditions are reflected in the actual circuit and assembly designs.

Oki assumes no responsibility or liability whatsoever for any failure or unusual or unexpected operation resulting from misuse, neglect, improper installation, repair, alteration or accident, improper handling, or unusual physical or electrical stress including, but not limited to, exposure to parameters outside the specified maximum ratings or operation outside the specified operating range.

Neither indemnity against nor license of a third party's industrial and intellectual property right, etc. is granted by us in connection with the use of product and/or the information and drawings contained herein. No responsibility is assumed by us for any infringement of a third party's right which may result from the use thereof.

When designing your product, please use our product below the specified maximum ratings and within the specified operating ranges, including but not limited to operating voltage, power dissipation, and operating temperature.

The products listed in this document are intended for use in general electronics equipment for commercial applications (e.g., office automation, communication equipment, measurement equipment, consumer electronics, etc.). These products are not authorized for use in any system or application that requires special or enhanced quality and reliability characteristics nor in any system or application where the failure of such system or application may result in the loss or damage of property or death or injury to humans. Such applications include, but are not limited to: traffic control, automotive, safety, aerospace, nuclear power control, and medical, including life support and maintenance.

Certain parts in this document may need governmental approval before they can be exported to certain countries. The purchaser assumes the responsibility of determining the legality of export of these parts and will take appropriate and necessary steps, at their own expense, for export to another country.

Copyright 2000 Oki Semiconductor

Oki Semiconductor reserves the right to make changes in specifications at anytime and without notice. This information furnished by Oki Semiconductor in this publication is believed to be accurate and reliable. However, no responsibility is assumed by Oki Semiconductor for its use; nor for any infringements of patents or other rights of third parties resulting from its use. No license is granted under any patents or patent rights of Oki.

---



# Oki REGIONAL SALES OFFICES

---

## **Northwest Area**

785 N. Mary Avenue  
Sunnyvale, CA 94086  
Tel: 408/720-8940  
Fax: 408/720-8965

## **North Central Area**

300 Park Blvd.  
Suite 365  
Itasca, IL 60143  
Tel: 630/250-1313  
Fax: 630/250-1414

## **Northeast Area**

138 River Road  
Shattuck Office Center  
Andover, MA 01810  
Tel: 978/688-8687  
Fax: 978/688-8896

## **Southwest Area**

2302 Martin Street  
Suite 250  
Irvine, CA 92715  
Tel: 949/752-1843  
Fax: 949/752-2423

## **Southeast Area**

1590 Adamson Parkway  
Suite 220  
Morrow, GA 30260  
Tel: 770/960-9660  
Fax: 770/960-9682

### **Oki Web Site:**

*<http://www.okisemi.com>*

### **For Oki Literature:**

*Call toll free 1-800-OKI-6388  
(6 a.m. to 5 p.m. Pacific Time)*

**Oki Stock No: 320182-000**



# **Oki Semiconductor**

### **Corporate Headquarters**

785 N. Mary Avenue  
Sunnyvale, CA 94086-2909  
Tel: 408/720-1900  
Fax: 408/720-1918