


General Description

KEC NPT Trench IGBTs offer low switching losses, high energy efficiency and short circuit ruggedness.

It is designed for applications such as motor control, uninterrupted power supplies(UPS), general inverters.

FEATURES

- High speed switching
- High system efficiency
- Short Circuit Withstand Times 10us
- Extremely enhanced avalanche capability

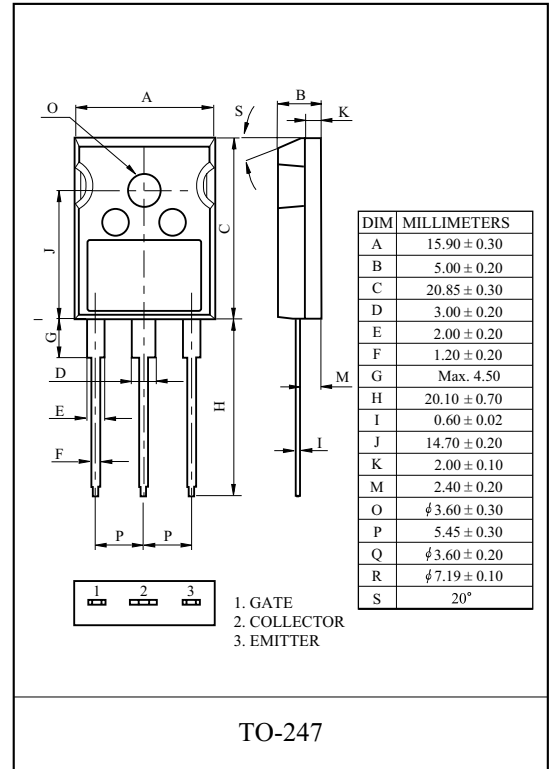


MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Emitter Voltage	V_{CES}	60	V
Gate-Emitter Voltage	V_{GES}	+20	V
Collector Current	@Tc=25	80	A
	@Tc=100	40	A
Pulsed Collector Current	I_{CM}^*	120	A
Diode Continuous Forward Current	@Tc=100	I_F	40 A
Diode Maximum Forward Current		I_{FM}	80 A
Maximum Power Dissipation	@Tc=25	P_D	290 W
	@Tc=100		116 W
Maximum Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 to +150	

*Repetitive rating : Pulse width limited by max. junction temperature

THERMAL CHARACTERISTIC

CHARACTERISTIC	SYMBOL	MAX.	UNIT
Thermal Resistance, Junction to Case (IGBT)	R_{thJC}	0.43	/W
Thermal Resistance, Junction to Case (DIODE)	R_{thJC}	1.45	/W
Thermal Resistance, Junction to Ambient	R_{thJA}	40	/W

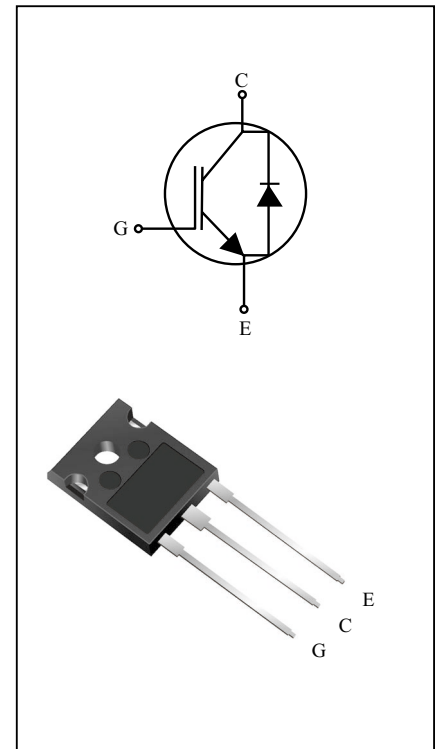


KGT40N60KDA

ELECTRICAL CHARACTERISTICS (Ta=25)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Static							
Collector-Emitter Breakdown Voltage	BV_{CES}	$V_{GE}=0V, I_C=250\mu A$	600	-	-	V	
Collector Cut-off Current	I_{CES}	$V_{GE}=0V, V_{CE}=600V$	-	-	250	μA	
Gate Leakage Current	I_{GES}	$V_{CE}=0V, V_{GE}=\pm 20V$	-	-	± 100	nA	
Gate Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=250\mu A$	4.5	5.5	7.0	V	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=40A$	-	1.80	2.20	V	
		$V_{GE}=15V, I_C=40A, T_C = 125$	-	2.10	-	V	
		$V_{GE}=15V, I_C=80A, T_C = 25$	-	2.45	-	V	
Dynamic							
Total Gate Charge	Q_g	$V_{CC}=400V, V_{GE}=15V, I_C= 40A$	-	170	-	nC	
Gate-Emitter Charge	Q_{ge}		-	25	-	nC	
Gate-Collector Charge	Q_{gc}		-	80	-	nC	
Turn-On Delay Time	$t_{d(on)}$	$V_{CC}=300V, I_C=40A, V_{GE}=15V, R_G=10$ Inductive Load, $T_C = 25$	-	50	-	ns	
Rise Time	t_r		-	40	-	ns	
Turn-Off Delay Time	$t_{d(off)}$		-	170	-	ns	
Fall Time	t_f		-	35	-	ns	
Turn-On Switching Loss	E_{on}		-	0.6	-	mJ	
Turn-Off Switching Loss	E_{off}		-	0.4	-	mJ	
Total Switching Loss	E_{ts}		-	1.0	-	mJ	
Turn-On Delay Time	$t_{d(on)}$		$V_{CC}=300V, I_C=40A, V_{GE}=15V, R_G=10$ Inductive Load, $T_C = 125$	-	55	-	ns
Rise Time	t_r			-	50	-	ns
Turn-Off Delay Time	$t_{d(off)}$			-	185	-	ns
Fall Time	t_f	-		75	-	ns	
Turn-On Switching Loss	E_{on}	-		1.2	-	mJ	
Turn-Off Switching Loss	E_{off}	-		1.0	-	mJ	
Total Switching Loss	E_{ts}	-		2.2	-	mJ	
Input Capacitance	C_{ies}	$V_{CE}=30V, V_{GE}=0V, f=1MHz$	-	3200	-	pF	
Output Capacitance	C_{oes}		-	200	-	pF	
Reverse Transfer Capacitance	C_{res}		-	100	-	pF	
Short Circuit Withstand Time	t_{sc}	$V_{CC}=300V, V_{GE}=15V, T_C=100$	10	-	-	μs	

Note 1 : Energy loss include tail current and diode reverse recovery.

Marking



- ① Device Mark 1
- ② Device Mark 2
- ③ Lot No

KGT40N60KDA

ELECTRICAL CHARACTERISTIC OF DIODE

CHARACTERISTIC	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Diode Forward Voltage	V_F	$I_F = 40A$	$T_C = 25$	-	1.8	2.3	V
			$T_C = 125$	-	1.5	-	
Diode Reverse Recovery Time	t_{rr}		$T_C = 25$	-	90	-	ns
			$T_C = 125$	-	105	-	
Diode Peak Reverse Recovery Current	I_{rr}	$I_F = 40A$ $di/dt = -600A/\mu s$	$T_C = 25$	-	16	-	A
			$T_C = 125$	-	29	-	
Diode Reverse Recovery Charge	Q_{rr}		$T_C = 25$	-	730	-	nC
			$T_C = 125$	-	1550	-	

上海众韩授权代理
www.ckb-sh.com

KGT40N60KDA

Fig 1. Saturation Voltage Characteristics

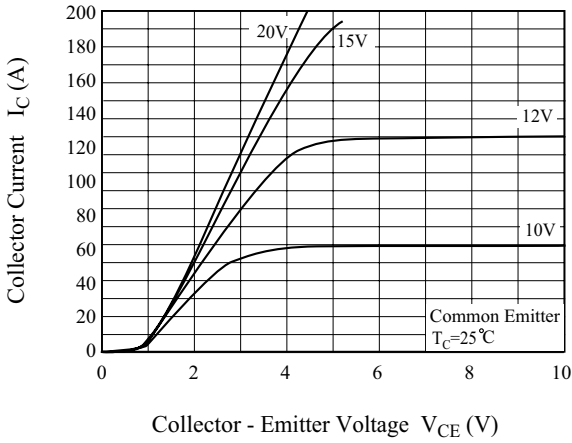


Fig 2. Saturation Voltage Characteristics

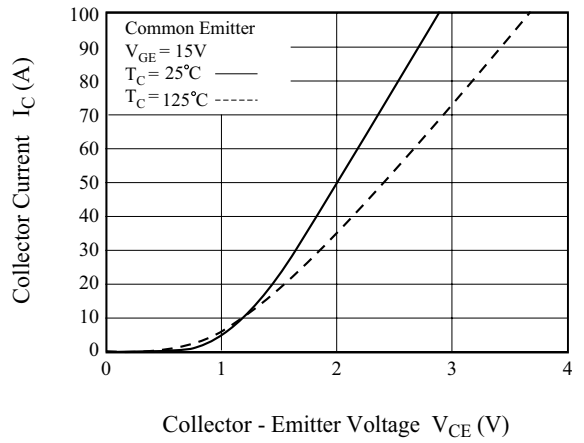


Fig 3. Saturation Voltage vs. Case Temperature

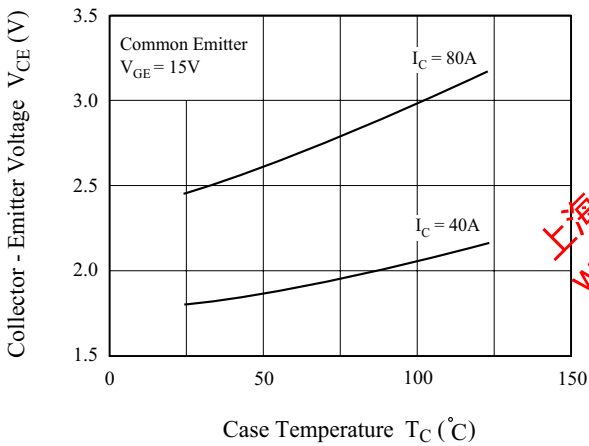


Fig 4. Saturation Voltage vs. V_{GE}

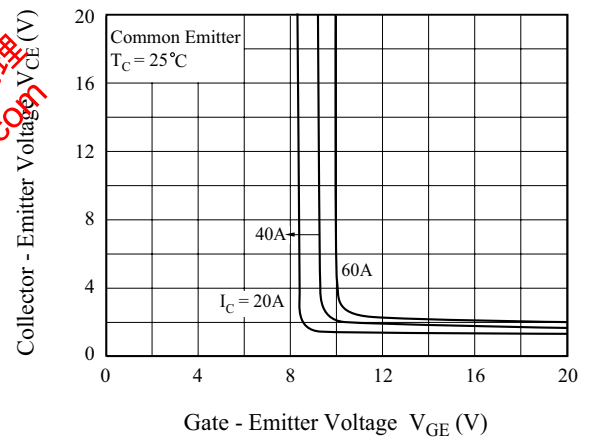


Fig 5. Saturation Voltage vs. V_{GE}


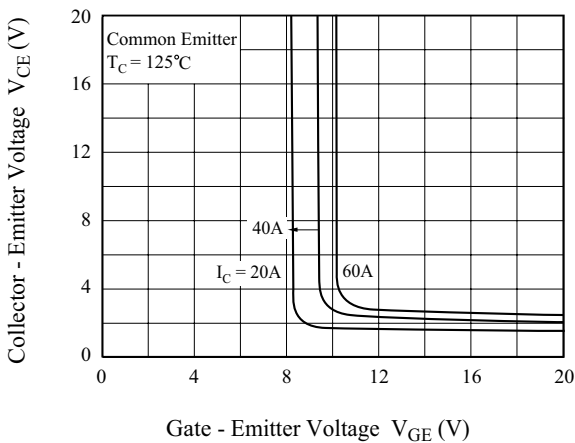


Fig 6. Capacitance Characteristics

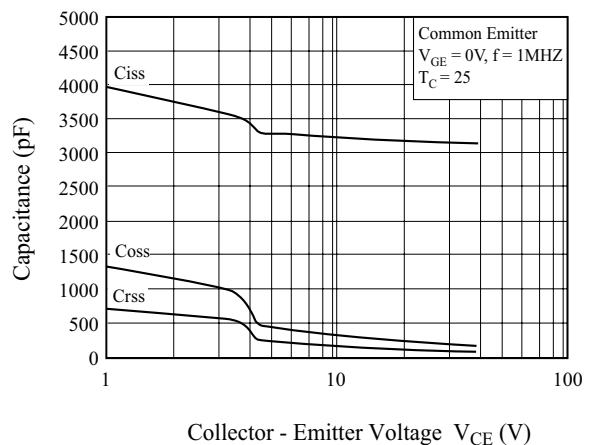

上海众群授权代理
 www.ckb-sh.com

KGT40N60KDA

Fig 7. Turn-On Characteristics vs. Gate Resistance

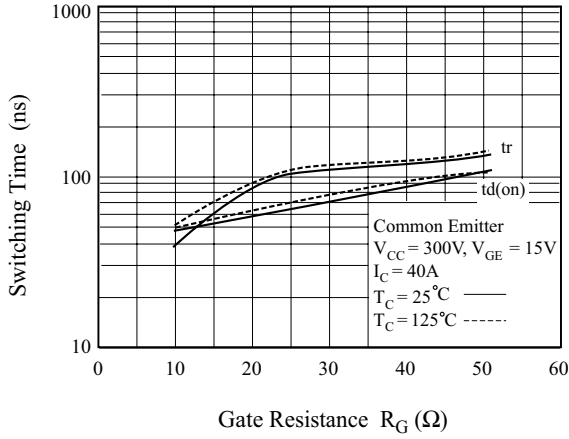


Fig 8. Turn-Off Characteristics vs. Gate Resistance

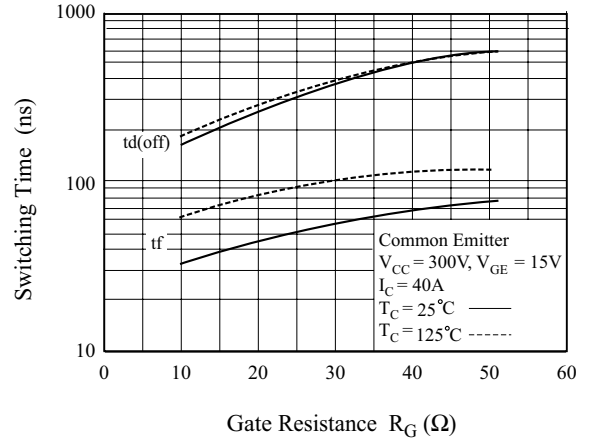


Fig 9. Switching Loss vs. Gate Resistance

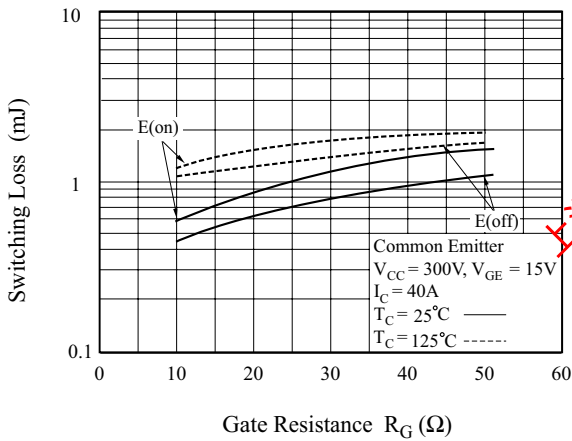


Fig 10. Turn-On Characteristics vs. Collector Current

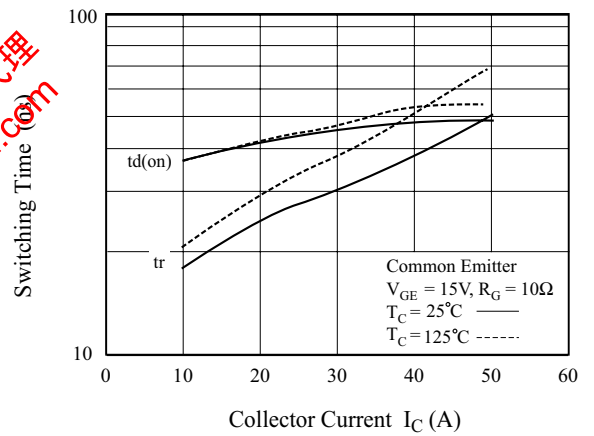


Fig 11. Turn-Off Characteristics vs. Collector Current


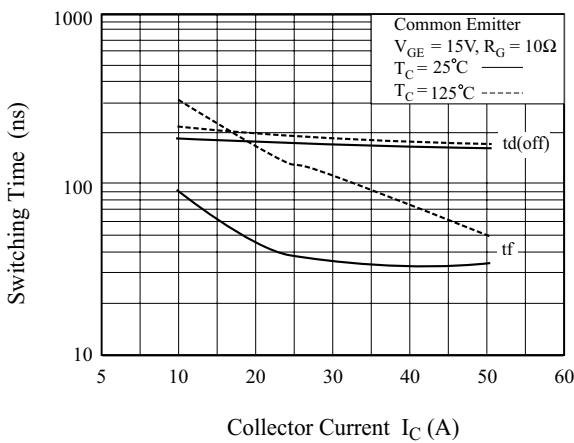


Fig 12. Switching Loss vs. Collector Current

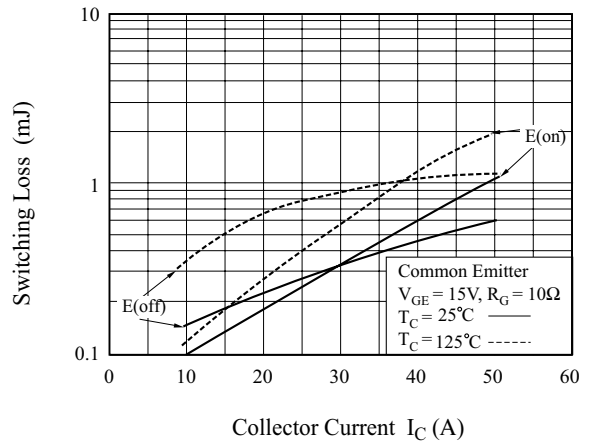

KGT40N60KDA

Fig 13. Gate Charge Characteristics

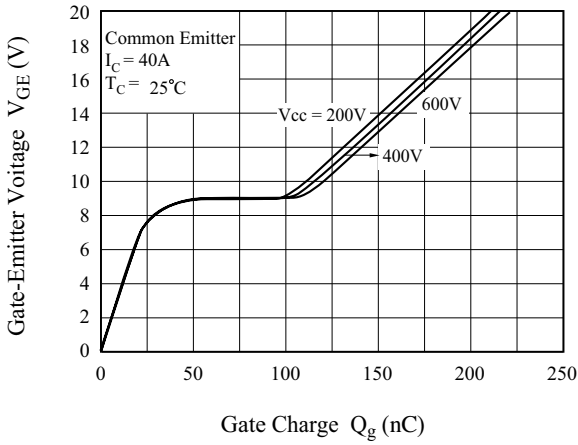


Fig 14. SOA Characteristics



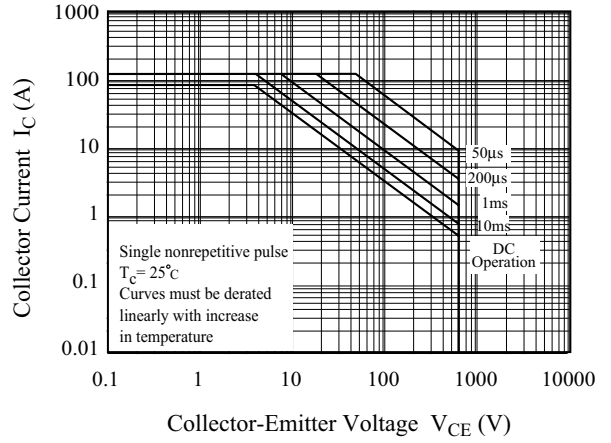


Fig 15. Turn-Off SOA

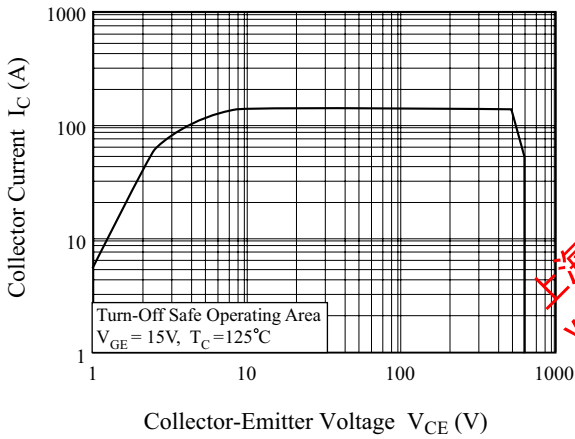

上海众群授权代理
 www.ckb-sh.com

Fig 16. Transient Thermal Impedance of IGBT

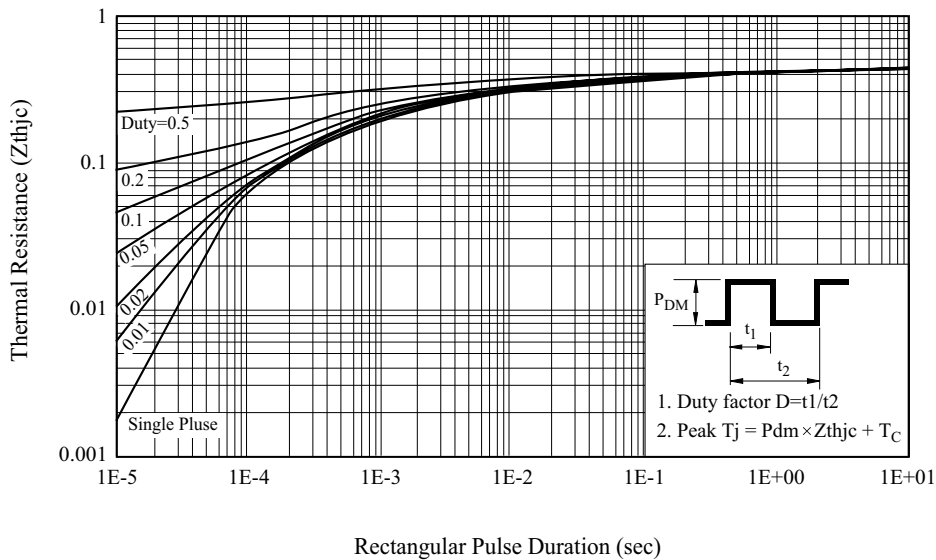

KGT40N60KDA

Fig 17. Forward Characteristics

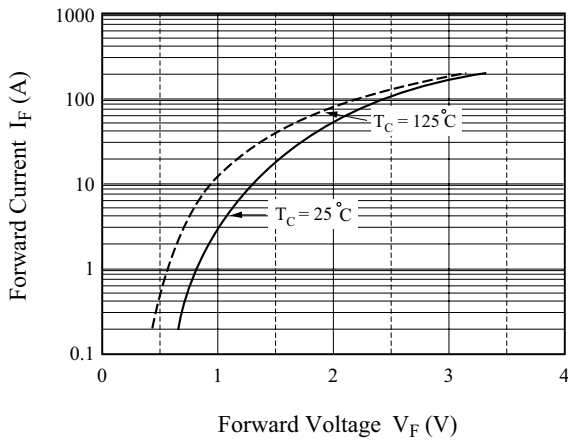


Fig 18. Reverse Recovery Current


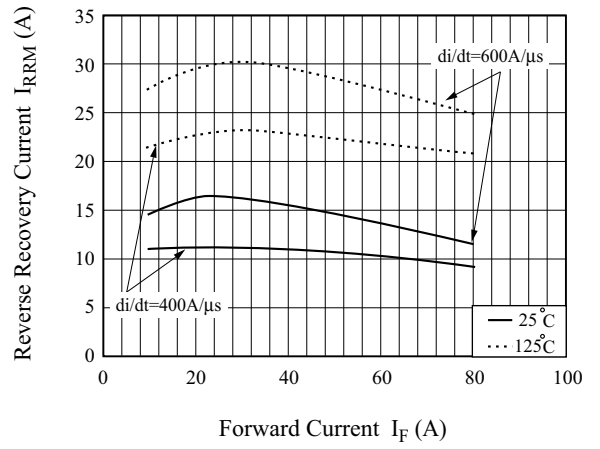


Fig 19. Reverse Recovery Time

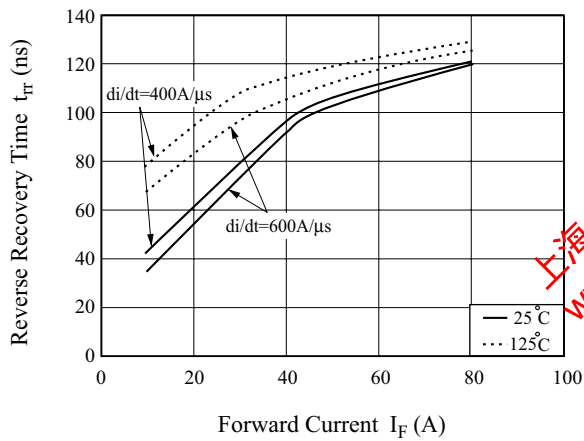

上海众韩授权代理
www.ckb-sh.com