

## General Description

This planar stripe MOSFET has better characteristics, such as fast switching time, low on resistance, low gate charge and excellent avalanche characteristics. It is mainly suitable for electronic ballast and switching mode power supplies.




## FEATURES

- $V_{DSS}=400V$ ,  $I_D=6.0A$
- Drain-Source ON Resistance :  
 $R_{DS(ON)}=1.0 \Omega$  @  $V_{GS}=10V$
- $Qg(\text{typ.})=32nC$

## MAXIMUM RATING (Tc=25 °C)

CHARACTERISTIC	SYMBOL	RATING		UNIT	
		KHB6D0N40P	KHB6D0N40F		
Drain-Source Voltage	$V_{DSS}$	400		V	
Gate-Source Voltage	$V_{GSS}$	$\pm 30$		V	
Drain Current	@T <sub>C</sub> =25 °C	$I_D$	6.0	6.0*	A
	@T <sub>C</sub> =100 °C		3.6	3.6*	
	Pulsed (Note 1)	$I_{DP}$	24	24*	
Single Pulsed Avalanche Energy (Note 2)	$E_{AS}$	450		mJ	
Repetitive Avalanche Energy (Note 1)	$E_{AR}$	9.2		mJ	
Peak Diode Recovery dv/dt (Note 3)	dv/dt	4.5		V/ns	
Drain Power Dissipation	T <sub>c</sub> =25 °C	$P_D$	73	38	W
	Derate above 25 °C		0.74	0.3	
Maximum Junction Temperature	$T_j$	150		°C	
Storage Temperature Range	$T_{stg}$	-55 ~ 150		°C	
<b>Thermal Characteristics</b>					
Thermal Resistance, Junction-to-Case	$R_{thJC}$	1.71	3.31	°C/W	
Thermal Resistance, Case-to-Sink	$R_{thCS}$	0.5	-	°C/W	
Thermal Resistance, Junction-to-Ambient	$R_{thJA}$	62.5	62.5	°C/W	

\* : Drain current limited by maximum junction temperature.

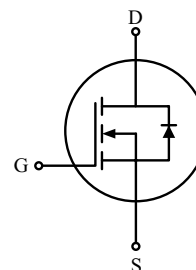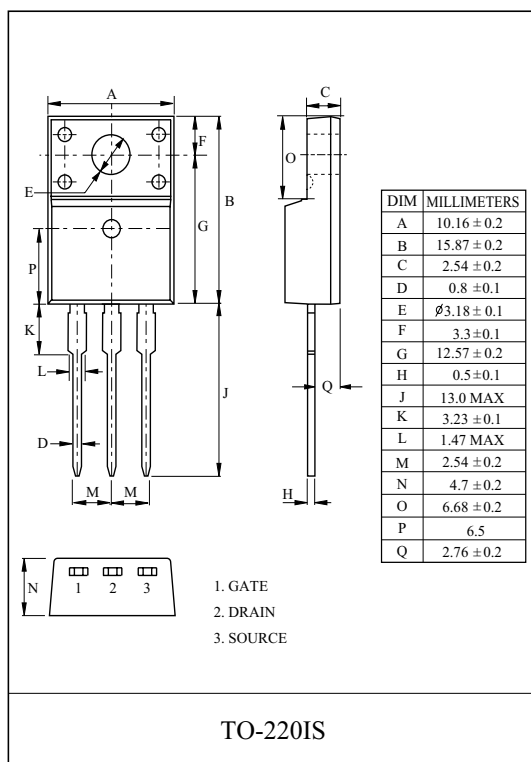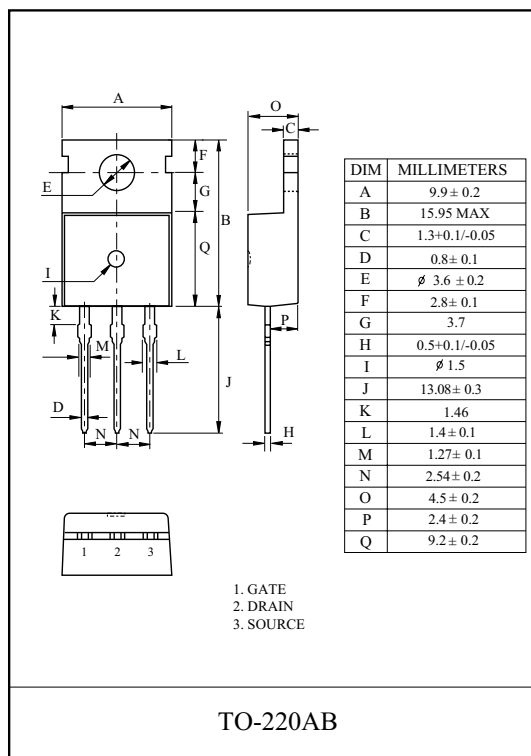

# KHB6D0N40P/F

## ELECTRICAL CHARACTERISTICS (Tc=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>Static</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$I_D=250\mu A, V_{GS}=0V$	400	-	-	V
Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_j$	$I_D=250\mu A$ , Referenced to 25 °C	-	0.54	-	V/°C
Drain Cut-off Current	$I_{DSS}$	$V_{DS}=400V, V_{GS}=0V$ ,	-	-	1	$\mu A$
Gate Threshold Voltage	$V_{th}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	-	4.0	V
Gate Leakage Current	$I_{GSS}$	$V_{GS}=\pm 30V, V_{DS}=0V$	-	-	$\pm 100$	nA
Drain-Source ON Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=3A$	-	0.83	1	$\Omega$
<b>Dynamic</b>						
Total Gate Charge	$Q_g$	$V_{DS}=320V, I_D=6A$ $V_{GS}=10V$ (Note4,5)	-	32	42	nC
Gate-Source Charge	$Q_{gs}$		-	6	-	
Gate-Drain Charge	$Q_{gd}$		-	14	-	
Turn-on Delay time	$t_{d(on)}$	$V_{DD}=200V$ $R_L=33\Omega$ $R_G=25\Omega$ (Note4,5)	-	-	38	ns
Turn-on Rise time	$t_r$		-	-	140	
Turn-off Delay time	$t_{d(off)}$		-	-	55	
Turn-off Fall time	$t_f$		-	-	85	
Input Capacitance	$C_{iss}$	$V_{DS}=25V, V_{GS}=0V, f=1.0MHz$	-	-	1220	pF
Reverse Transfer Capacitance	$C_{riss}$		-	-	32	
Output Capacitance	$C_{oss}$		-	-	130	
<b>Source-Drain Diode Ratings</b>						
Continuous Source Current	$I_S$	$V_{GS}<V_{th}$	-	-	6	A
Pulsed Source Current	$I_{SP}$		-	-	24	
Diode Forward Voltage	$V_{SD}$	$I_S=6A, V_{GS}=0V$	-	-	1.5	V
Reverse Recovery Time	$t_{rr}$	$I_S=6A, V_{GS}=0V$ , $dI_S/dt=100A/\mu s$	-	260	-	ns
Reverse Recovery Charge	$Q_{rr}$		-	1.3	-	$\mu C$

Note 1) Repetivity rating : Pulse width limited by junction temperature.

Note 2)  $L=13.7mH, I_S=6A, V_{DD}=50V, R_G=25\Omega$ , Starting  $T_j=25\text{ }^\circ\text{C}$ .


Note 3)  $I_S \leq 6A, dI/dt \leq 100A/\mu s, V_{DD} \leq BV_{DSS}$ , Starting  $T_j=25\text{ }^\circ\text{C}$ .

Note 4) Pulse Test : Pulse width  $\leq 300\mu s$ , Duty Cycle  $\leq 2\%$ .


Note 5) Essentially independent of operating temperature.

# KHB6D0N40P/F


$I_D - V_{DS}$

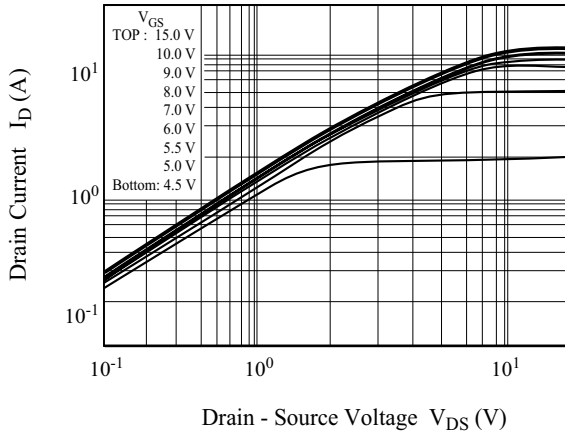


$I_D - V_{GS}$

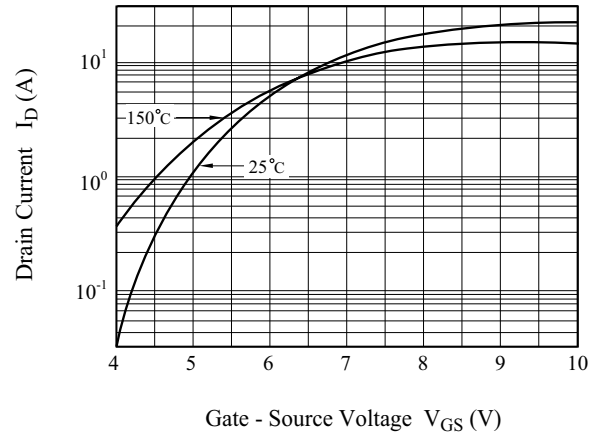


$V_{th} - T_j$

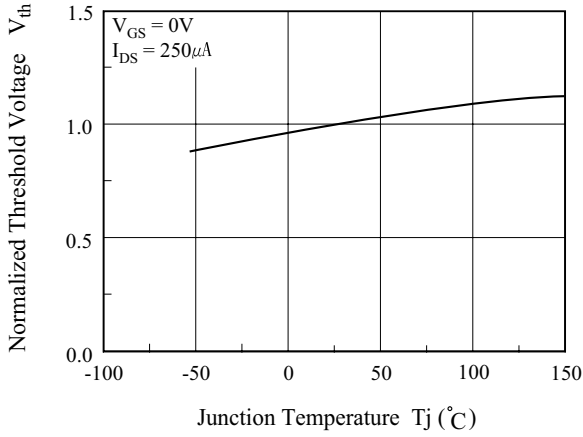


$R_{DS(ON)} - I_D$

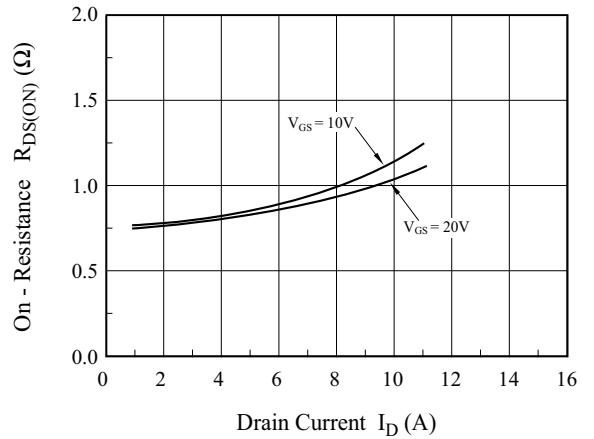

$I_S - V_{SD}$

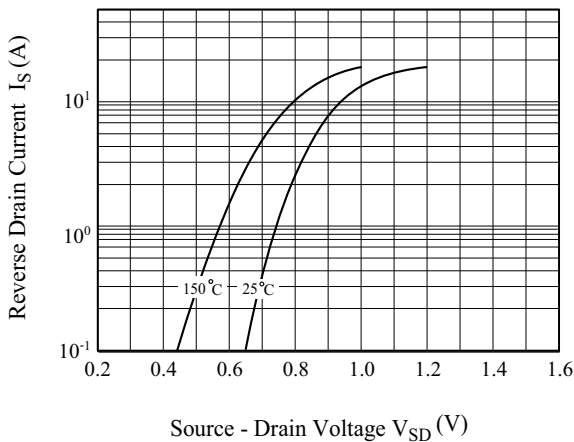


$R_{DS(ON)} - T_j$

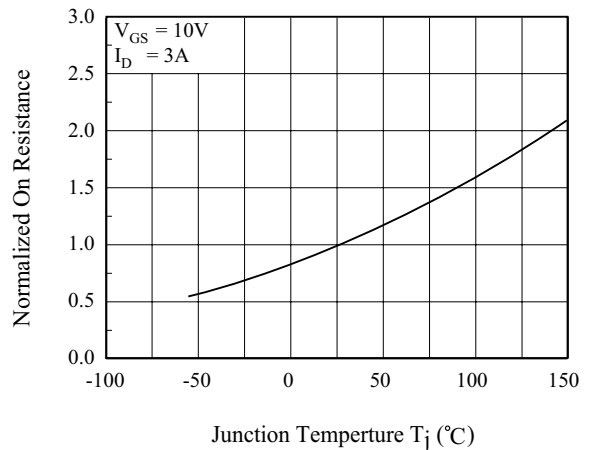


# KHB6D0N40P/F


C - V<sub>DS</sub>

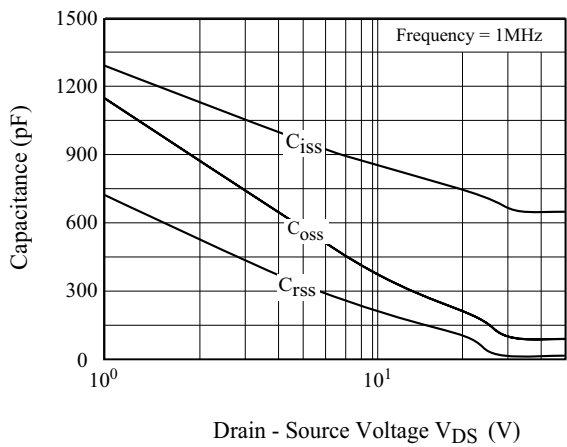


Q<sub>g</sub> - V<sub>GS</sub>

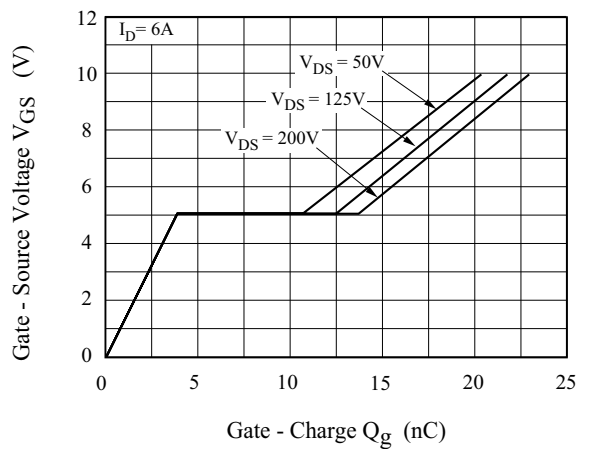


Safe Operation Area

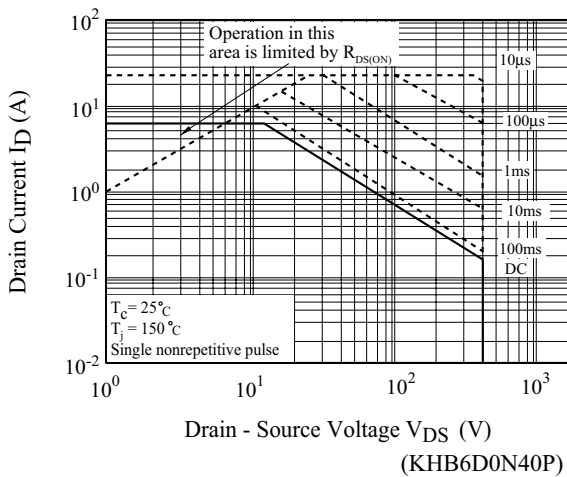



Safe Operation Area

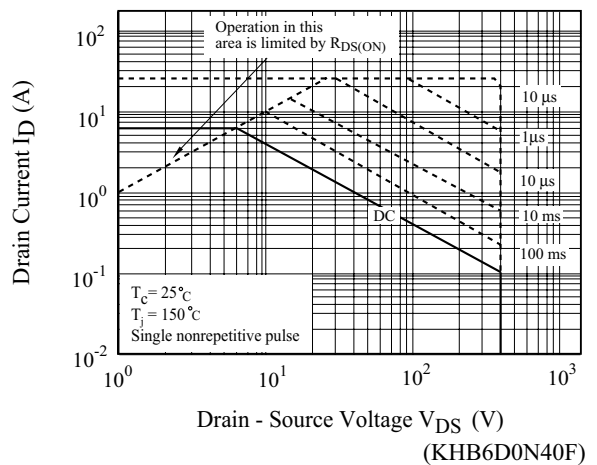

I<sub>D</sub> - T<sub>j</sub>


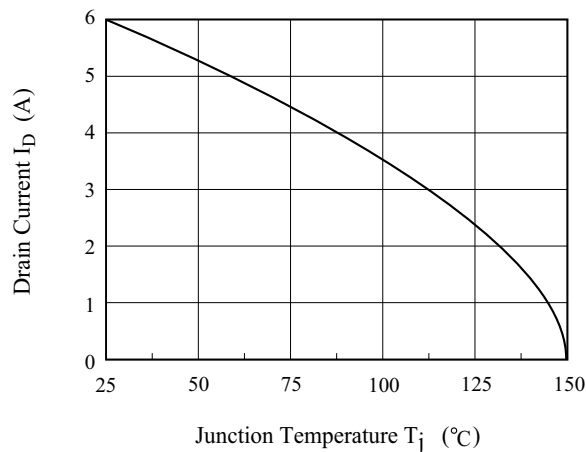


# KHB6D0N40P/F

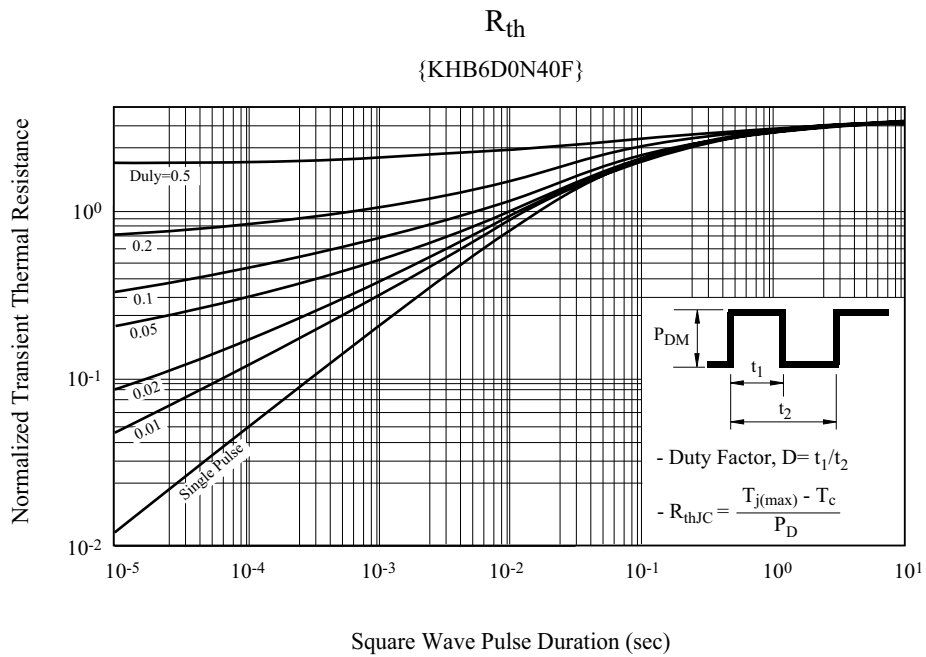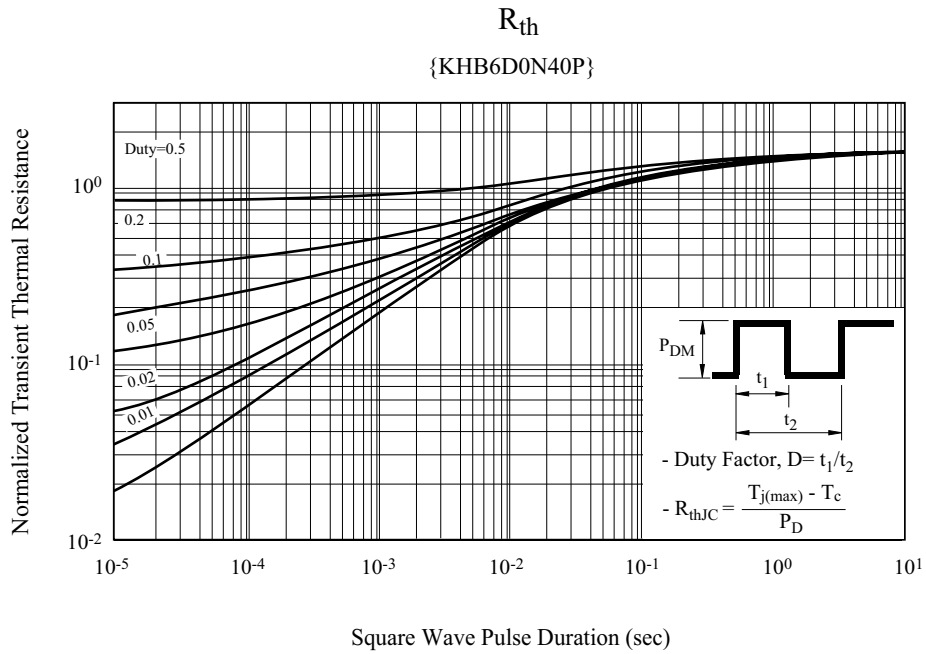


# KHB6D0N40P/F


## - Gate Charge

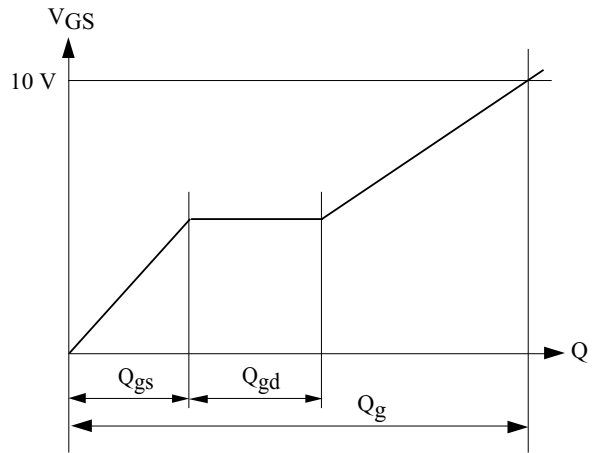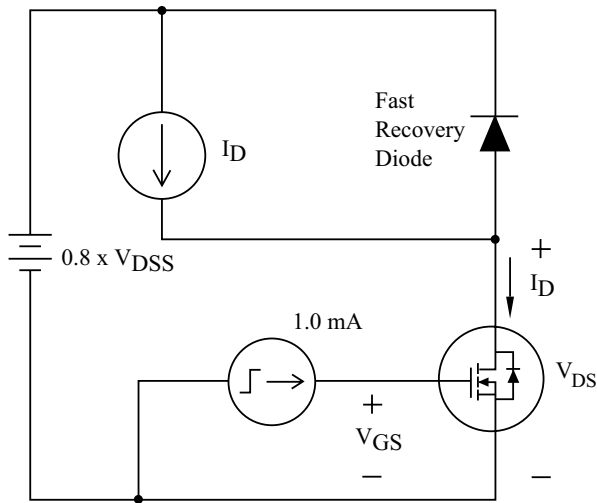



## - Single Pulsed Avalanche Energy

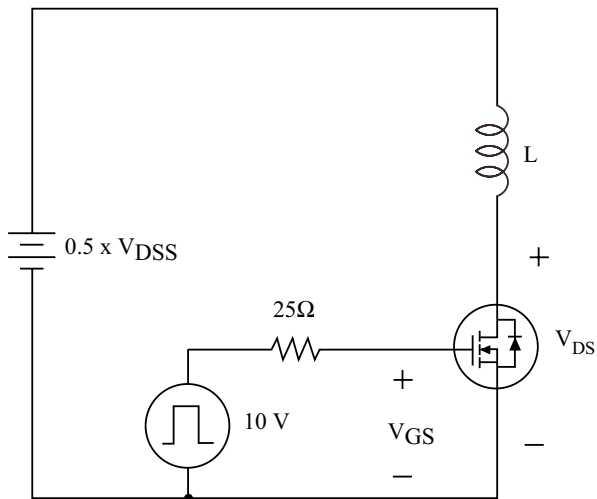

$$E_{AS} = \frac{1}{2} L I_{AS}^2 \frac{BV_{DSS}}{BV_{DSS} - V_{DD}}$$

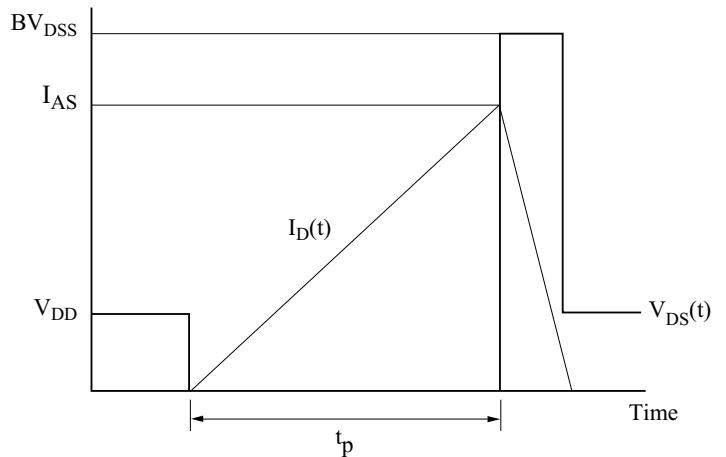

## - Resistive Load Switching

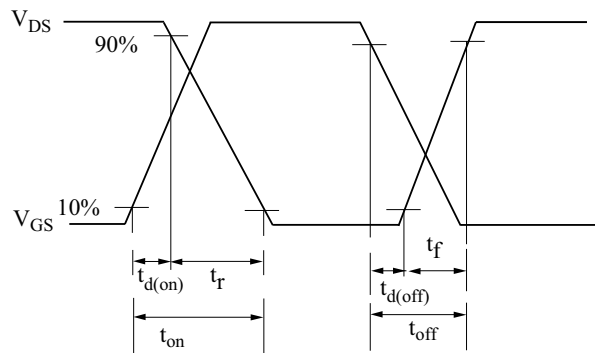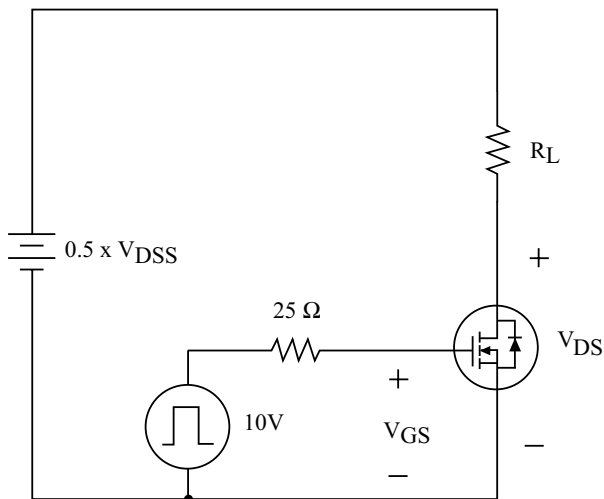

# KHB6D0N40P/F

- Source - Drain Diode Reverse Recovery and  $dv/dt$

