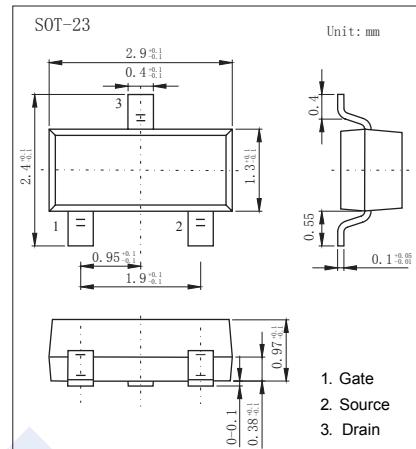


P-Channel MOSFET

KI007P-HF

■ Features

- $V_{DS}(V) = -12V$
- $I_D = -3.5 A$
- $R_{DS(ON)} < 65m\Omega$ ($V_{GS} = -4.5V$, $I_D = -1A$)
- $R_{DS(ON)} < 100m\Omega$ ($V_{GS} = -2.5V$, $I_D = -0.5A$)
- Pb-Free Package May be Available. The G-Suffix Denotes a Pb-Free Lead Finish

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	-12	V
Gate-Source Voltage	V_{GS}	± 12	
Continuous Drain Current @ $T_J=25^\circ C$	I_D	3.5	A
Power Dissipation	P_D	1	W
Junction Temperature	T_J	150	$^\circ C$
Junction Storage Temperature Range	T_{stg}	-55 to 150	

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V_{DSS}	$I_D = -250 \mu A$, $V_{GS}=0V$	-12			V
Zero Gate Voltage Drain Current	$I_{DS(on)}$	$V_{DS} = -12V$, $V_{GS}=0V$, $T_J=25^\circ C$			-1	uA
Gate-Body leakage current	I_{GSS}	$V_{DS}=0V$, $V_{GS} = \pm 12V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D = -250 \mu A$	-0.5		-1.3	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = -4.5V$, $I_D = -1A$			65	$m\Omega$
		$V_{GS} = -2.5V$, $I_D = -0.5A$			100	
		$V_{GS} = -4.5V$, $I_D = -3A$			77	
		$V_{GS} = -2.5V$, $I_D = -2A$			120	

■ Marking

Marking	007P_F
---------	--------