

AUDIO/VIDEO SWITCHING IC FOR TV

The KIA1218AN is an audio/video switching IC for TV sets. Conforming to I²C bus standards, it allows you to perform various switching operations through the bus lines by using a microcomputer. Thanks to its 2-channel outputs, the KIA1218AN can also be used for the PIP systems. Furthermore, since the presence of a signal on its sync signal output pin can be determined by a microcomputer, it is possible to check each input/output channel (self-diagnosis).


FEATURES

- I²C bus control.
- Video : 5-channel inputs and 2-channel outputs.
(2 channels conforming to S system)
- Audio : 5-channel inputs and 3-channel outputs.
- Self-diagnostic function.
- ADC inputs based on European 21-pin standards.
- ADC inputs based on S1/S2 terminal standards.
- Switchable subaddress.

MAXIMUM RATINGS (Ta=25°C)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Supply Voltage	V _{CC}	14	V
Power Dissipation	P _{D MAX}	1800 (Note)	mW
Operating Temperature	T _{opr}	-20~65	°C
Storage Temperature	T _{stg}	-55~150	°C

(Note) When using the device at temperatures above Ta=25°C, reduce the rated power dissipation by 14.4mW per degree of centigrade. (See the diagram below).

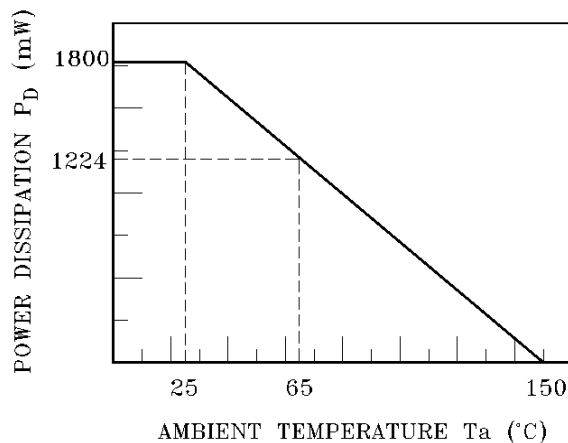


RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	PIN No.	MIN.	TYP.	MAX.	UNIT	REMARK
Supply Voltage	33	8.1	9.0	9.9	V	-
Composite Signal Input Amplitude	7, 10, 12, 16, 28	-	1.0	-	V _{P-P}	100 IRE
Y Input Amplitude	12, 16	-	1.0	-	V _{P-P}	100 IRE
Comb Y Input Amplitude	30	-	2.0	-	V _{P-P}	-
Chroma Input Amplitude	14, 18	-	286	-	mV _{P-P}	Burst
Comb Chroma Input Amplitude	32	-	572	-	mV _{P-P}	Burst
Audio Input Amplitude	5, 6, 8, 9, 11, 13, 15, 17, 29, 31	-	-	6.0	V _{P-P}	-

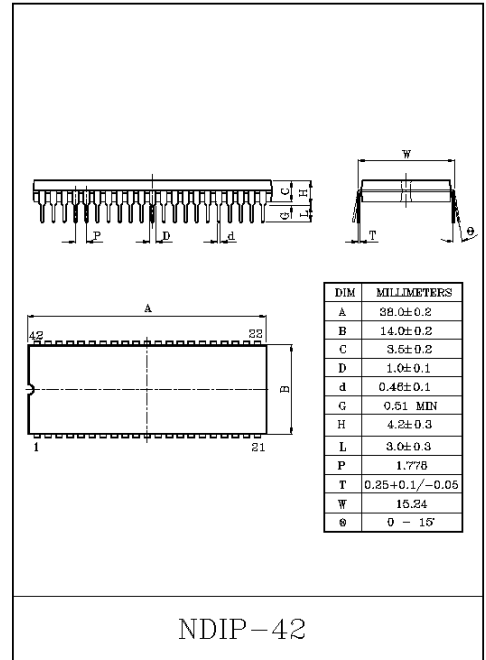


KIA1218AN

BLOCK DIAGRAM

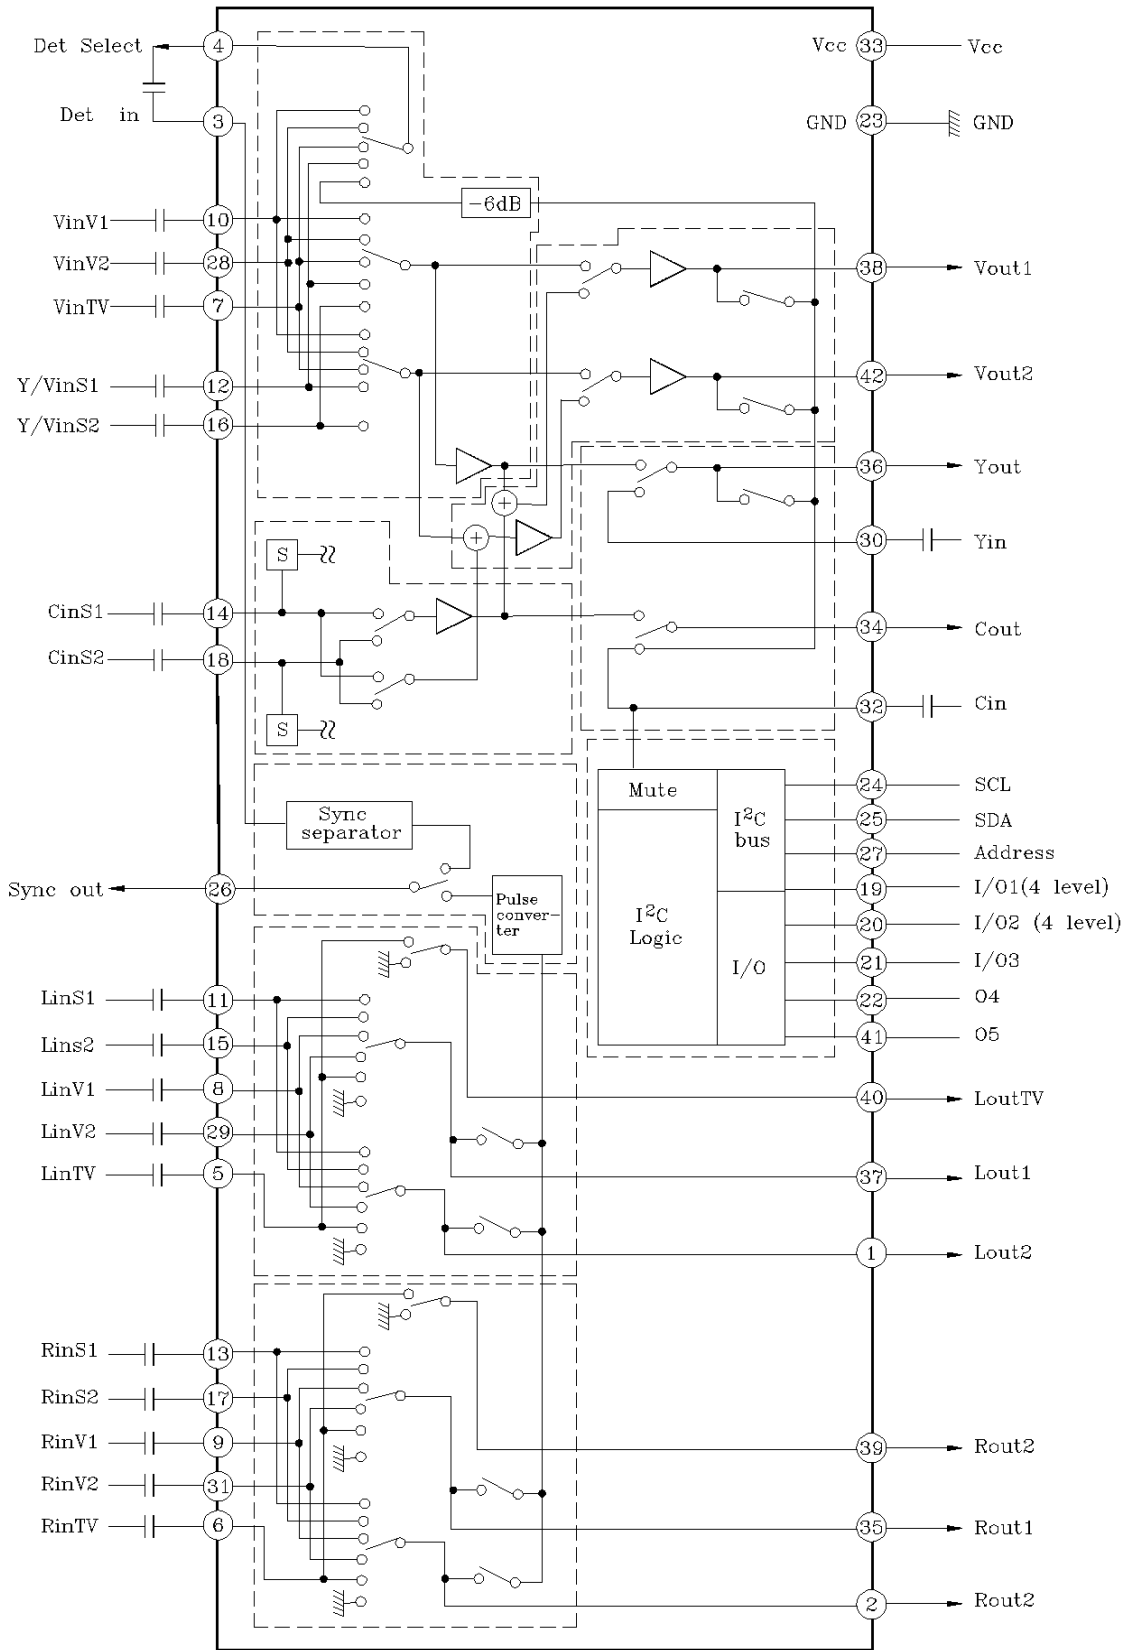

KIA1218AN

PIN ASSIGNMENT

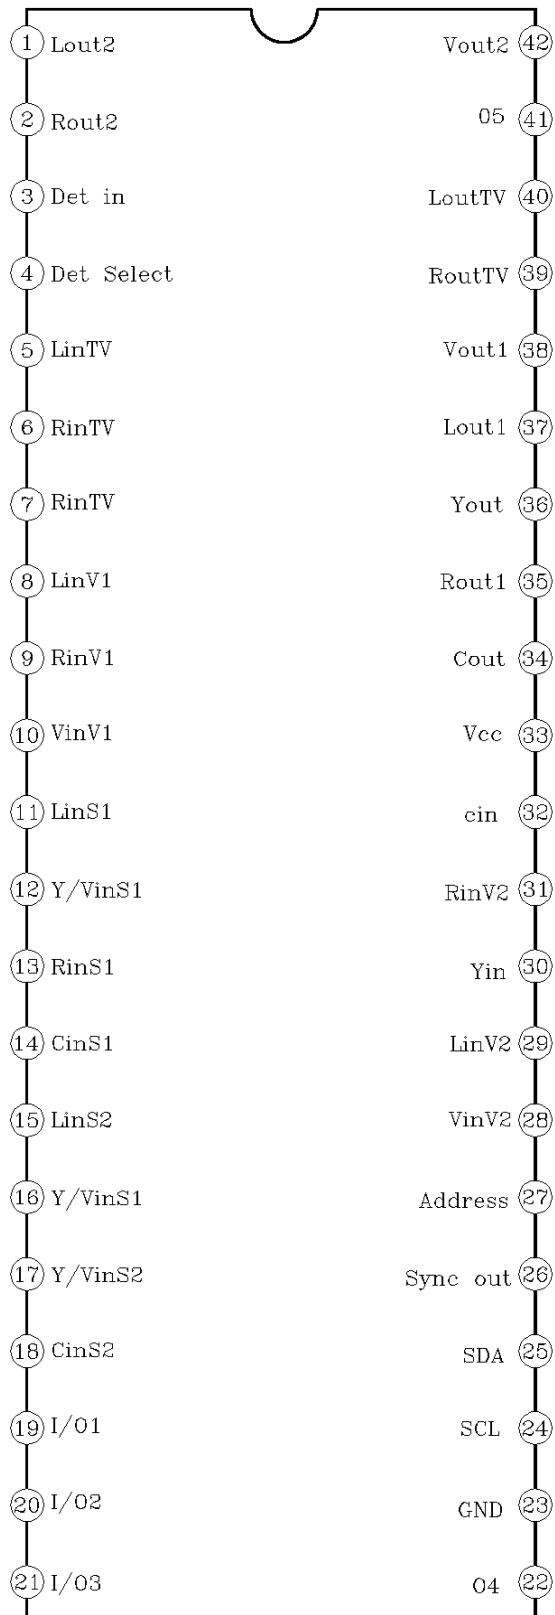

KIA1218AN

PIN DESCRIPTION

PIN NO.	NAME	FUNCTION	INTERFACE
1	L _{out2}	<p>This pin is for output a sub-channel left audio signal. The signals fed into the chip via L_{in}V1, L_{in}V2, L_{in}S1, L_{in}S2, or L_{in} TV is output from this pin is 45Ω.</p> <p>Furthermore, the signal output from this pin is pulse-converted for use in self-diagnosis. The converted signal is output from Sync Out. This output can be muted in combination with R_{out2} by bus control.</p>	
2	R _{out2}	<p>This pin is for output a sub-channel right audio signal. The signals fed into the chip via R_{in}V1, R_{in}V2, R_{in}S1, R_{in}S2, or R_{in}TV is output from this pin. The output resistance of this pin is 45Ω. Furthermore, the signal output from this pin is pulse-converted for use in self-diagnosis. The converted signal is output from Sync Out. This output can be muted in combination with L_{out2} by bus control.</p>	
3	Det in	<p>This pin is for input a sync separation signal. Input the signal from Det Select to this pin with capacitance coupling. The input resistance of this pin is 18kΩ. The sync signal separated from Det Select is outputted from Sync Out for use in self-diagnosis.</p>	
4	Det Select	<p>This pin is for output a sync separation signal. Signals V_{in}V1, V_{in}V2, V_{in}TV, Y/V_{in}S1, V_{out}1, V_{out}2, V_{out}, or C_{out} are outputted from this pin. The output resistance of this pin is 35Ω. Input the signal from this pin to Det in with capacitance coupling.</p>	

KIA1218AN

PIN NO.	NAME	FUNCTION	INTERFACE
5	L_{inTV}	<p>This pin is for output a left audio signal from the main demodulator in the TV set. The signal fed into this pin is presented to L_{outTV}, L_{out1}, and L_{out2}. The input dynamic range of the pin is $6.5V_{P-P}$ and the input resistance is $70k\Omega$.</p>	
6	R_{inTV}	<p>This pin is for input a right audio signal from the main demodulator in the TV set. The signal fed into this pin is presented to R_{outTV}, R_{out1}, and R_{out2}. The input dynamic range of this pin is $6.5V_{P-P}$ and the input resistance is $70k\Omega$.</p>	
7	V_{inTV}	<p>This pin is for input a composite audio signal from the main demodulator in the TV set. The signal fed into this pin is presented to V_{out1}, V_{out2}, Y_{out}, and C_{out}. The same signal is also output from Det Select as a sync separation signal. The input dynamic range of this pin is $2.0V_{P-P}$ and the input resistance is $30k\Omega$.</p>	
8	L_{inV1}	<p>This pin is for input a left audio signal from an external source (V1 channel). This pin can also be used for PIP signal input. The signal fed into this pin is presented to L_{out2}. The input dynamic range of this pin is $6.5V_{P-P}$ and the input resistance is $70k\Omega$.</p>	

KIA1218AN

PIN NO.	NAME	FUNCTION	INTERFACE
9	$R_{in}V1$	<p>This pin is for input a right audio signal from an external source (V1 channel). This pin can also be used for PIP signal input. The signal fed into this pin is presented to R_{out1} and R_{out2}. The input dynamic range of this pin is $6.5V_{P-P}$ and the input resistance is $70k\Omega$.</p>	
10	$V_{in}V1$	<p>This pin is for input a composite video signal from an external source (V1 channel). This pin can also be used for PIP signal input. The signal fed into this pin is presented to V_{out1}, V_{out2}, Y_{out}, and C_{out}. The same signal is also output from Det Select as a sync separation signal. The input dynamic range of this pin is $2.0V_{P-P}$ and the input resistance is $30k\Omega$.</p>	
11	$L_{in}S1$	<p>This pin is for input a left audio signal from an external source (S1 channel). The signal fed into this pin is presented to L_{out1} and L_{out2}. The input dynamic range of this pin is $6.5V_{P-P}$ and the input resistance is $70k\Omega$.</p>	
12	$Y/V_{in}S1$	<p>This pin is for input a luminance signal or composite video signal from an external source (S1 channel). The signal fed into this pin is presented to V_{out1}, V_{out2}, Y_{out}, and C_{out}. The same signal is also output from Det Select as a sync separation signal. The input dynamic range of this pin is $2.0V_{P-P}$ and the input resistance is $30k\Omega$.</p>	

KIA1218AN

PIN NO.	NAME	FUNCTION	INTERFACE
13	R_{inS1}	<p>This pin is for input a right audio signal from an external source (S1 channel). The signal fed into this pin is presented to R_{out1} and R_{out2}.</p> <p>The input dynamic range of this pin is $6.5V_{P-P}$ and the input resistance is $70k\Omega$.</p>	
14	C_{inS1}	<p>This pin is for input a chroma signal from an external source (S1 channel). It also functions as an S-mode select switch for the S1 channel. The S mode is selected when the pin voltage is DC opened. The signal fed into this pin is presented to C_{out}, directly and to V_{out1}, and V_{out2} after being combined with the Y_{inS1} signal.</p> <p>The input dynamic range of this pin is $2.0V_{P-P}$ and the input resistance is $30k\Omega$.</p>	
15	L_{inS2}	<p>This pin is for input a left audio signal from an external source (S2 channel). The signal fed into this pin is presented to L_{out1} and L_{out2}.</p> <p>The input dynamic range of this pin is $6.5V_{P-P}$ and the input resistance is $70k\Omega$.</p>	
16	Y/V_{inS2}	<p>This pin is for input a luminance signal or composite audio signal from an external source (S2 channel). The signal fed into this pin is presented to V_{out1}, V_{out2}, Y_{out}, and C_{out}. The input dynamic range of this pin is $2.0V_{P-P}$ and the input resistance is $30k\Omega$.</p>	

KIA1218AN

PIN NO.	NAME	FUNCTION	INTERFACE
17	R _{in} S2	<p>This pin is for input a right audio signal from an external source (S2 channel). The signal fed into this pin is presented to R_{out1} and R_{out2}. The input dynamic range of this pin is 6.5V_{P-P} and the input resistance is 70kΩ.</p>	
18	C _{in} S2	<p>This pin is for input a chroma signal from an external source (S2 channel). It also functions as an S-mode select switch for the S2 channel. The S mode is selected when the pin voltage is DC opened. The signal fed into this pin is presented to C_{out}, directly and to V_{out1}, and V_{out2} after being combined with the Y_{in}S2 signal. The input dynamic range of this pin is 2.0V_{P-P} and the input resistance is 30kΩ.</p>	
19	I/O1	<p>This pin is an ADC input/DAC output pin. The ADC is a 4-level detection type (2 bits). The threshold levels are 8.0V, 3.0V, and 0.75V. The DAC (1bit) is an open-collector output. Make sure that the current flowing into this pin is 2.0mA or less.</p>	
20	I/O2	<p>This is an ADC input/DAC output pin. The ADC is a 4-level detection type (2bits). The threshold levels are 8.0V, 3.0V and 0.75V. The DAC (1bit) is an open-collector output. Make sure that the current flowing into this pin is 2.0mA or less.</p>	

KIA1218AN

PIN NO.	NAME	FUNCTION	INTERFACE
21	I/O3	This is an ADC input/DAC output pin. The ADC is a 2-level detection type (1bit). The threshold level is 2.25V. The DAC (1bit) is an open-collector output. Make sure that the current flowing into this pin is 2.0mA or less.	
22	O4	This pin is for a 1bit DAC output. This is an open-collector output. Make sure that the current flowing into this pin is 2.0mA or less.	
23	GND	This is the GND pin.	
24	SCL	This pin is for input an I ² C bus clock. The input threshold level of this pin is 2.25V.	
25	SDA	This is an I ² C bus data input/output pin. The input threshold level of this pin is 2.25V. Make sure that the current flowing into this pin is 3.0mA or less.	

KIA1218AN

PIN NO.	NAME	FUNCTION	INTERFACE
26	Sync out	<p>This pin is for output a self-diagnostic sync signal. The signal separated from V_{inTV}, V_{inV1}, V_{inV2}, Y/V_{inS1}, V_{out2}, Y_{out}, or C_{out} is outputted from this pin. In addition, the signal derived from L_{out1}, R_{out1}, L_{out2}, or R_{out2}, is also output from this pin for use in audio block diagnosis. This is an open-collector output. Make sure that the current flowing into this pin is 2.0mA or less.</p>	
27	Address	<p>This is for an I²C bus slave address select switch. The threshold level of this pin is 2.25V. The following lists the addresses :</p> <p>High : 92H (Write), 93H (Read) Low : 90H (Write), 91H (Read)</p>	
28	V_{inV2}	<p>This pin is for input a composite video signal from an external source (V2 channel). This pin can also be used for PIP signal input. The signal fed into this pin is presented to V_{out1}, V_{out2}, Y_{out}, and C_{out}. The same signal is also output from Det select as a sync separation signal. The input dynamic range of this pin is 2.0V_{P-P} and the input resistance is 30kΩ.</p>	
29	L_{inV2}	<p>This pin is for input a left audio signal from an external source (V2 channel.) This pin can also be used for PIP signal input. The signal fed into this pin is presented to L_{out1} and L_{out2}. The input dynamic range of this pin is 6.5V_{P-P} and the input resistance is 70kΩ.</p>	

KIA1218AN

PIN NO.	NAME	FUNCTION	INTERFACE
30	Y_{in}	This pin is for input a luminance signal from an external comb filter. The signal fed into this pin is presented to Y_{out} . The input dynamic range of this pin is $5.5V_{P-P}$ and the input resistance is $60k\Omega$.	
31	R_{inV2}	This pin is for input a right audio signal from an external source (V2 channel.) This pin can also be used for PIP signal input. The signal fed into this pin is presented to R_{out1} and R_{out2} . The input dynamic range of this pin is $6.5V_{P-P}$ and the input resistance is $70k\Omega$.	
32	C_{in}	This pin is for input a chroma signal from an external comb filter. The signal fed into this pin is presented to C_{out} . The input dynamic range of this pin is $5.5V_{P-P}$ and the input resistance is $60k\Omega$. This pin also functions as a audio mute switch. The entire audio output can be muted by pulling the voltage on this pin below $2.25V$.	
33	V_{CC}	This is the power supply pin. Apply 9V to this pin. The current consumption of this pin is $47mA$.	
34	C_{out}	This pin is for output a chroma signal. The signal fed into C_{in} , C_{inS1} , C_{inS2} , V_{inV1} , V_{inV2} , Y/V_{inS1} , Y/V_{inS2} , or V_{inTV} is outputted from this pin. The output resistance of this pin is 25Ω . The same signal is also outputted from Det Select as a sync separation signal.	



KIA1218AN

PIN NO.	NAME	FUNCTION	INTERFACE
35	R _{out1}	<p>This pin is for output the main channel right audio signal. The signal fed into R_{in}V1, R_{in}V2, R_{in}S1, R_{in}S2, or R_{in} TV is outputted from this pin. The output resistance of this pin is 45Ω.</p> <p>Furthermore, the signal outputted from this pin is pulse-converted for use in self-diagnosis. The converted signal is outputted from Sync Out. This outputted can be muted independently or L_{out1} by bus control.</p>	
36	Y _{out}	<p>This pin is for output a luminance signal. The signal fed into Y_{in}, Y/V_{in}S1, Y/V_{in}S2, V_{in}V1, V_{in}V2, or V_{in}TV is outputted from this pin. The output resistance of this pin is 25Ω.</p> <p>The same signal is also outputted from Det Select as a sync separation signal.</p>	
37	L _{out1}	<p>This pin is for output the main channel left audio signal. The signal fed into L_{in}V1, L_{in}V2, L_{in}S1, L_{in}S2, or L_{in}TV is outputted from this pin. The output resistance of this pin is 45Ω.</p> <p>Furthermore, the signal outputted from this pin is pulse-converted for use in self-diagnosis. The converted signal is outputted from Sync Out.</p> <p>This output can be muted independently of R_{out1} by bus control.</p>	

KIA1218AN

PIN NO.	NAME	FUNCTION	INTERFACE
38	V_{out1}	<p>This pin is for output the main channel Composite video signal. The signal fed in V_{inTV}, V_{inV1}, V_{inV2}, V_{inS1}, V_{inS2}, $Y_{inS1}+C_{inS1}$, or $Y_{inS2}+C_{inS2}$ is outputted from this pin. The output resistance of this pin is 25Ω.</p> <p>The same signal is also outputted from Det Select as a sync separation signal.</p>	
39	R_{outTV}	<p>This pin is for output only the signal that is forwarded from R_{inTV}. The output resistance of this pin is 45Ω. This output can be muted in combination with L_{outTV} by bus control.</p>	
40	L_{outTV}	<p>This pin is for output only the signal that is forwarded from L_{inTV}. The output resistance of this pin is 45Ω. This output can be muted in combination with R_{outTV} by bus control.</p>	

KIA1218AN

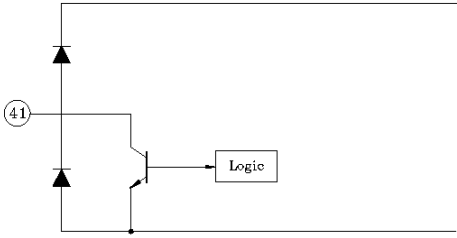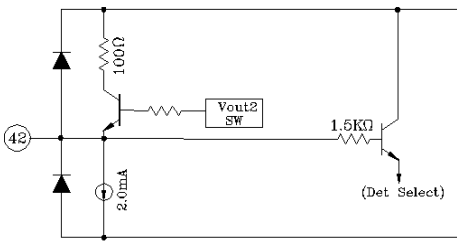PIN NO.	NAME	FUNCTION	INTERFACE
41	O5	<p>This is a 1bit DAC output pin. This is an open-collector output. Make sure that the current flowing into this pin is 2.0mA or less.</p>	 <p>The diagram shows pin 41 connected to the collector of an NPN transistor. The emitter is grounded. The base is connected to a logic block. Two diodes are connected in series between the supply and the collector to limit current.</p>
42	V _{out2}	<p>This pin is for output a sub-channel Composite video signal. The signal fed into V_{in}TV, V_{in}V1, V_{in}V2, V_{in}S1, V_{in}S2, Y_{in}S1+C_{in}S1, or Y_{in}S2+C_{in}S2 is outputted from this pin. The output resistance of this pin is 25Ω. The same signal is also outputted from Det Select as a sync separation signal.</p>	 <p>The diagram shows pin 42 connected to the collector of an NPN transistor. The emitter is grounded. The base is connected to a switch labeled 'Vout2 SW'. A 100Ω resistor is connected between the supply and the collector. A 2.0mA current source is connected to the collector. A 1.5KΩ resistor is connected between the collector and the 'Det Select' pin.</p>

KIA1218AN

BUS DATA SPECIFICATIONS

Data structure

(1) Write

S	Slave address (90H or 92H)	W (0)	A	Data 1	A	Data 2	A	Data 3	A	P
---	-------------------------------	----------	---	--------	---	--------	---	--------	---	---

(2) Read

S	Slave address (91H or 93H)	R (1)	A	Data 4	A	P
---	-------------------------------	----------	---	--------	---	---

* Slave address is switched by the voltage applied to pin 27 (address). Switched to 90H when low (GND) ; switeched to 92H when high (V_{CC}) during write mode.

Contents of data

Mode	DATA No.	CONTENTS OF DATA							
Write	Data 1 [F0H]	B07	B06	B05	B04	B03	B02	B01	B00
		Audio mute				Forced TV Audio	/	YC output switching	
	L _{out} TV R _{out} TV	L _{out} 2 R _{out} 2	R _{out} 1	L _{out} 1	Y _{out}			C _{out}	
	Data 2 [1FH]	B17	B16	B15	B14	B13	B12	B11	B10
		Sync detection sensitivity switching	Sync output switching	Sync (diagnosis) detection switching			Input Select (Main)		
	Data 3 [07H]	B27	B26	B25	B24	B23	B22	B21	B20
DAC output switching					Input Select (Sub)				
Read	Data 4	B37	B36	B35	B34	B33	B32	B31	B30
		ADC input discrimination					S input discrimination		Power- on reset
I/O3	I/O2 Hi	I/O2 Low	I/O2 Hi	I/O2 Low	C _{in} S1	C _{in} S2			

(Note) Shown in [] are reset data.

(Note) The data contents marked by a slash (/) are an unused bit (data free).

KIA1218AN

Main Video Select

MODE		OUTPUT SIGNAL	S INPUT DISCRIMINATION		BUS DATA		
INPUT	S/V		CS1	CS2	INPUT SELECT (MAIN)		
S1	V	$V_{in}S1$	Low	*	0	0	0
	S	$Y/V_{in}S1 + C_{in}S1$	Open				
	FV	$Y/V_{in}S1$					
S2	V	$Y/V_{in}S2$	*	Low	0	1	0
	S	$Y/V_{in}S2 + C_{in}S2$		Open			
	FV	$Y/V_{in}S2$					
V1	V	$V_{in}V1$	*	*	1	0	1
V2	V	$V_{in}V2$	*	*	1	1	0
TV	V	$V_{in}TV$	*	*	1	1	1

Do not use [100] for the input select data.

Main L/R Select

MODE	MAIN L/R OUTPUT SIGNAL		BUS DATA			
	L_{out1}	R_{out1}	FORCED TV VOICE	INPUT SELECT (MAIN)		
INPUT	L_{out1}	R_{out1}	B03	B12	B11	B10
S1	$L_{in}S1$	$R_{in}S1$	0	0	0	*
S2	$L_{in}S2$	$R_{in}S2$		0	1	*
V1	$L_{in}V1$	$R_{in}V1$		1	0	1
V2	$L_{in}V2$	$R_{in}V2$		1	1	0
TV	$L_{in}TV$	$R_{in}TV$		1	1	1
TV	$L_{in}TV$	$R_{in}TV$	1	*	*	*

Do not use [100] for the input select data.

KIA1218AN

Y output select

MODE		Y OUTPUT SIGNAL	MAIN V SELECT MODE (SEE TABLE 2-2.)		BUS DATA Y OUTPUT SWITCHING
INPUT	THROUGH	Y_{out}			B01
S1	Y_{in}	Y_{in}	S1	V or FV	0
	V through	$Y/V_{in}S1$		S	1
	Y through	$Y/V_{in}S1$			*
S2	Y_{in}	Y_{in}	S2	V or FV	0
	V through	$Y/V_{in}S2$		S	1
	Y through	$Y/V_{in}S2$			*
V1	Y_{in}	Y_{in}	V1	V	0
	V through	$V_{in}V1$			1
V2	Y_{in}	Y_{in}	V2	V	0
	V through	$V_{in}V2$			1
TV	Y_{in}	Y_{in}	TV	V	0
	V through	$V_{in}TV$			1

C output Select

MODE		Y OUTPUT SIGNAL	MAIN V SELECT MODE (SEE TABLE 2-2.)		BUS DATA C OUTPUT SWITCHING
INPUT	THROUGH	C_{out}			B00
S1	C_{in}	C_{in}	S1	V or FV	0
	V through	$Y/V_{in}S1$		S	1
	C through	$C_{in}S1$			*
S2	C_{in}	C_{in}	S2	V or FV	0
	V through	$Y/V_{in}S2$		S	1
	C through	$C_{in}S2$			*
V1	C_{in}	C_{in}	V1	V	0
	V through	$V_{in}V1$			1
V2	C_{in}	C_{in}	V2	V	0
	V through	$V_{in}V2$			1
TV	C_{in}	C_{in}	TV	V	0
	V through	$V_{in}TV$			1

KIA1218AN

Sync detection select

MODE		DETECTION SELECT	SYNC OUTPUT	BUS DATA				
				SYNC SWITCHING	SYNC DETECTION SWITCHING			
		DET SELECT	SYNC OUT	B16	B15	B14	B13	
Video Input	TV	V _{in} TV	Sync	0	0	1	1	
	V1	V _{in} V1				0	1	
	V2	V _{in} V2				1	0	
	S1	Y/V _{in} S1				0	0	
Video Output	V _{out} 1	V _{out} 1	Sync	0	1	1	1	
	V _{out} 2	V _{out} 2				0	1	
	Y _{out}	Y _{out}				1	0	
	C _{out}	C _{out}				0	0	
Audio Output	R _{out} 1	★	R _{out} 1	1	*	1	1	
	L _{out} 2	★				L _{out} 1	0	1
	R _{out} 2	★				R _{out} 2	1	0
	L _{out} 2	★				L _{out} 2	0	0

For Det Select marked by ★, the video input or video output corresponding to data B15, B14, and B13 is selected.

Sync detection sensitivity switching

MODE		BUS DATA
		DETECTION SENSITIVITY SWITCHING
		B17
Sensitivity	High	1
	Low	0

KIA1218AN

Audio mute

MODE		BUS DATA			
		AUDIO MUTE			
OUTPUT	MUTE	B07	B06	B05	B04
L _{out1}	off	*	*	*	0
	on				1
R _{out1}	off	*	*	0	*
	on			1	
L _{out2} R _{out2}	off	*	0	*	*
	on		1		
L _{outTV} R _{outTV}	off	0	*	*	*
	on	1			

DAC output switching

MODE		BUS DATA				
		DAC OUTPUT SWITCHING				
OUTPUT	STATE	B27	B26	B25	B24	B23
I/O1	Open	*	*	*	*	0
	Low					1
I/O2	Open	*	*	*	0	*
	Low				1	
I/O3	Open	*	*	0	*	*
	Low			1		
O4	Open	*	0	*	*	*
	Low		1			
O5	Open	0	*	*	*	*
	Low	1				

KIA1218AN

Read mode

Power-on reset discrimination

MODE		BUS DATA	
		POWER-ON RESET	
		B30	
Reset	on	1	
	off	0	

S input discrimination

MODE		BUS DATA	
		S INPUT DISCRIMINATION	
INPUT	VOLTAGE	B32	B31
C _m S2	High (Open)	*	1
	Low		0
C _m S1	High (Open)	1	*
	Low	0	

ADC input discrimination


MODE		BUS DATA				
		ADC INPUT DISCRIMINATION				
INPUT	VOLTAGE	B37	B36	B35	B34	B33
I/O1	High	*	*	*	0	0
	Mid				1	0
	Low				0	1
	Bottom				1	1
I/O2	High	*	0	0	*	*
	Mid		1	0		
	Low		0	1		
	Bottom		1	1		
I/O3	High	0	*	*	*	*
	Low	1				

KIA1218AN


OUTLINE OF I²C BUS CONTROL FORMAT

The KIA1218AN's bus control format conforms to the philips I²C bus control format.


(1) Start and stop conditions

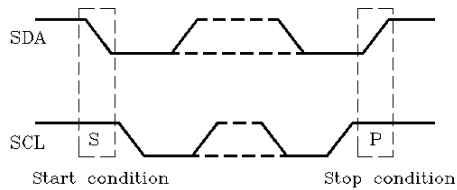

(2) Bit transfer

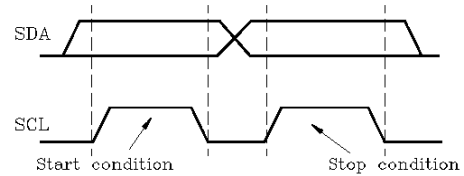

(3) Acknowledgement

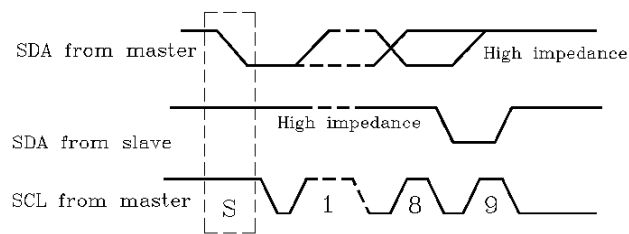

Purchase of KEC I²C components conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

KIA1218AN

ELECTRICAL CHARACTERISTICS

(Referenced to $V_{CC}=9V$ at $T_a=25^{\circ}C$ unless otherwise specified)

Current Consumption

PIN No.	PIN NAME	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT
33	V_{CC}	I_{CC}	-	30	47	64	mA

Pin Voltage

PIN No.	PIN NAME	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT
1	L_{out2}	V1	-	3.7	4.0	4.3	V
2	R_{out2}	V2	-	3.7	4.0	4.3	V
3	Det in	V3	-	6.3	6.6	6.9	V
4	Det Select	V4	-	3.4	3.7	4.0	V
5	L_{inTV}	V5	-	5.0	5.2	5.4	V
6	R_{inTV}	V6	-	5.0	5.2	5.4	V
7	V_{inTV}	V7	-	5.0	5.2	5.4	V
8	L_{inV1}	V8	-	5.0	5.2	5.4	V
9	R_{inV1}	V9	-	5.0	5.2	5.4	V
10	V_{inV1}	V10	-	5.0	5.2	5.4	V
11	L_{inS1}	V11	-	5.0	5.2	5.4	V
12	Y/V_{inS1}	V12	-	5.0	5.2	5.4	V
13	R_{inS1}	V13	-	5.0	5.2	5.4	V
14	C_{inS1}	V14	-	5.0	5.2	5.4	V
15	L_{inS2}	V15	-	5.0	5.2	5.4	V
16	Y/V_{inS2}	V16	-	5.0	5.2	5.4	V
17	R_{inS2}	V17	-	5.0	5.2	5.4	V
18	C_{inS2}	V18	-	5.0	5.2	5.4	V
23	GND	V23	-	-	0	-	V
28	V_{inV2}	V28	-	5.0	5.2	5.4	V
29	L_{inV2}	V29	-	5.0	5.2	5.4	V
30	Y_{in}	V30	-	5.0	5.2	5.4	V
31	R_{inV2}	V31	-	5.0	5.2	5.4	V
32	C_{in}	V32	-	5.0	5.2	5.4	V
33	V_{CC}	V33	-	-	9.0	-	V
34	C_{out}	V34	-	3.5	3.8	4.1	V
35	R_{out1}	V35	-	3.7	4.0	4.3	V
36	Y_{out}	V36	-	3.5	3.8	4.1	V
37	L_{out1}	V37	-	3.7	4.0	4.3	V
38	V_{out1}	V38	-	4.1	4.4	4.7	V
39	R_{outTV}	V39	-	3.7	4.0	4.3	V
40	L_{outTV}	V40	-	3.7	4.0	4.3	V
42	V_{out2}	V42	-	4.1	4.4	4.7	V

KIA1218AN

DC Characteristics

CHARACTERISTIC	MEASURED PIN	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	REMARK
Input Pin Input Resistance	Det in	R3	-	10	18	30	k Ω	Measure a change ΔI in the current flowing into each pin when the voltage is raised by 0.5V. Then calculate the input resistance value R. $R=0.5V/\Delta I$ [Ω]
	V _{in} TV	R7	-	20	30	40	k Ω	
	V _{in} V1	R10	-	20	30	40	k Ω	
	V _{in} V2	R28	-	20	30	40	k Ω	
	Y/V _{in} S1	R12	-	20	30	40	k Ω	
	Y/V _{in} S2	R16	-	20	30	40	k Ω	
	C _{in} S1	R14	-	20	30	40	k Ω	
	C _{in} S2	R18	-	20	30	40	k Ω	
	Y _{in}	R30	-	40	60	80	k Ω	
	C _{in}	R32	-	40	60	80	k Ω	
	L _{in} TV	R5	-	49	70	100	k Ω	
	R _{in} TV	R6	-	49	70	100	k Ω	
	L _{in} V1	R8	-	49	70	100	k Ω	
	R _{in} V1	R9	-	49	70	100	k Ω	
	L _{in} V2	R29	-	49	70	100	k Ω	
	R _{in} V2	R31	-	49	70	100	k Ω	
	L _{in} S1	R11	-	49	70	100	k Ω	
	R _{in} S1	R13	-	49	70	100	k Ω	
L _{in} S2	R15	-	49	70	100	k Ω		
R _{in} S2	R17	-	49	70	100	k Ω		
Output Pin Output Resistance	Det Select	R4	-	17	35	53	Ω	Measure a voltage change ΔV on each pin when a current of 100 μ A flows into the pin. Then calculate the output resistance value R. $R=\Delta V/100\mu A$ [Ω]
	V _{out} 1	R38	-	13	25	50	Ω	
	V _{out} 2	R42	-	13	25	50	Ω	
	Y _{out}	R36	-	13	25	50	Ω	
	C _{out}	R34	-	13	25	50	Ω	
	L _{out} TV	R40	-	20	45	90	Ω	
	R _{out} TV	R39	-	20	45	90	Ω	
	L _{out} 1	R37	-	20	45	90	Ω	
	R _{out} 1	R35	-	20	45	90	Ω	
	L _{out} 2	R1	-	20	45	90	Ω	
R _{out} 2	R2	-	20	45	90	Ω		
S Mode Discrimination Voltage	C _{in} S1	VthC1	-	1.75	2.25	2.75	V	Voltage on pin 14 at Which data B31 changes.
	C _{in} S2	VthC2	-	1.75	2.25	2.75	V	Voltage on pin 18 at Which data B32 changes.
External Mute ON Voltage	C _{in}	VthM	-	1.75	2.25	2.75	V	Voltage on pin 32 at Which voice is muted.

KIA1218AN

CHARACTERISTIC	MEASURED PIN	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	REMARK
Address Switching Voltage	address	VthA	-	1.75	2.25	2.75	V	Voltage on pin 27 at which the slave address changes.
ADC Input Discrimination Voltage	I/O1	VthI1L	-	0.55	0.75	0.95	V	Low-Bottom threshold level of I/O1 input (pin 19).
	I/O1	VthI1M	-	2.5	3.0	3.5	V	Mid-Low threshold level of I/O1 input (pin 19).
	I/O1	VthI1H	-	7.5	8.0	8.5	V	High-Mid threshold level of I/O1 input (pin 19).
	I/O2	VthI2L	-	0.55	0.75	0.95	V	Low-Bottom threshold level of I/O2 input (pin 20).
	I/O2	VthI2M	-	2.5	3.0	3.5	V	Mid-Low threshold level of I/O2 input (pin 20).
	I/O2	VthI2H	-	7.5	8.0	8.5	V	High-Mid threshold level of I/O1 input (pin 20).
	I/O3	VthI3	-	1.75	2.25	2.75	V	High-Low threshold level of I/O1 input (pin 21).

KIA1218AN

AC Characteristics

CHARACTERISTIC	SELECT MODE	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	TEST METHOD
V _{out1} Input Dynamic Range	V _{in} TV	VDR7V1	-	1.5	2.0	-	V _{P-P}	(1) Apply a 15kHz sine wave to each input pin. (2) In each select mode, measure an input amplitude at which the output waveform on pin 38 begins to be distorted.
	V _{in} V1	VDR10V1	-	1.5	2.0	-	V _{P-P}	
	V _{in} V2	VDR28V1	-	1.5	2.0	-	V _{P-P}	
	Y/V _{in} S1	VDR12V1	-	1.5	2.0	-	V _{P-P}	
	C _{in} S1	VDR14V1	-	1.5	2.0	-	V _{P-P}	
	Y/V _{in} S2	VDR16V1	-	1.5	2.0	-	V _{P-P}	
	C _{in} S2	VDR18V1	-	1.5	2.0	-	V _{P-P}	
V _{out1} Gain	V _{in} TV	G7V1	-	5.5	6.0	6.5	dB	(1) Apply a 15kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, find the gain between input and output.
	V _{in} V1	G10V1	-	5.5	6.0	6.5	dB	
	V _{in} V2	G28V1	-	5.5	6.0	6.5	dB	
	Y/V _{in} S1	G12V1	-	5.5	6.0	6.5	dB	
	C _{in} S1	G14V1	-	5.5	6.0	6.5	dB	
	Y/V _{in} S2	G16V1	-	5.5	6.0	6.5	dB	
	C _{in} S2	G18V1	-	5.5	6.0	6.5	dB	
V _{out1} Frequency Response	V _{in} TV	F7V1	-	10	-	-	MHz	(1) Apply a 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, measure a frequency at which the output amplitude on pin 38 is 3dB down from the 15kHz applied level.
	V _{in} V1	F10V1	-	10	-	-	MHz	
	V _{in} V2	F28V1	-	10	-	-	MHz	
	Y/V _{in} S1	F12V1	-	10	-	-	MHz	
	C _{in} S1	F14V1	-	10	-	-	MHz	
	Y/V _{in} S2	F16V1	-	10	-	-	MHz	
	C _{in} S2	F18V1	-	10	-	-	MHz	
V _{out1} Crosstalk	V _{in} TV	CT7V1	-	55	60	-	dB	(1) Apply a 3.58MHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, compare signal output from the selected pin with leakage components from nonselected pins to find a crosstalk.
	V _{in} V1	CT10V1	-	55	60	-	dB	
	V _{in} V2	CT28V1	-	55	60	-	dB	
	Y/V _{in} S1	CT12V1	-	55	60	-	dB	
	C _{in} S1	CT14V1	-	55	60	-	dB	
	Y/V _{in} S2	CT16V1	-	55	60	-	dB	
	C _{in} S2	CT18V1	-	55	60	-	dB	
V _{out2} Input Dynamic Range	V _{in} TV	VDR7V2	-	1.5	2.0	-	V _{P-P}	(1) Apply a 15kHz sine wave to each input pin. (2) In each select mode, measure an input amplitude at which the output waveform on pin 42 begins to be distorted.
	V _{in} V1	VDR10V2	-	1.5	2.0	-	V _{P-P}	
	V _{in} V2	VDR28V2	-	1.5	2.0	-	V _{P-P}	
	Y/V _{in} S1	VDR12V2	-	1.5	2.0	-	V _{P-P}	
	C _{in} S1	VDR14V2	-	1.5	2.0	-	V _{P-P}	
	Y/V _{in} S2	VDR16V2	-	1.5	2.0	-	V _{P-P}	
	C _{in} S2	VDR18V2	-	1.5	2.0	-	V _{P-P}	

KIA1218AN

CHARACTERISTIC	SELECT MODE	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	TEST METHOD
V_{out2} Gain	V_{inTV}	G7V2	-	5.5	6.0	6.5	dB	(1) Apply a 15kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, find the gain between input and output.
	V_{inV1}	G10V2	-	5.5	6.0	6.5	dB	
	V_{inV2}	G28V2	-	5.5	6.0	6.5	dB	
	Y/V_{inS1}	G12V2	-	5.5	6.0	6.5	dB	
	C_{inS1}	G14V2	-	5.5	6.0	6.5	dB	
	Y/V_{inS2}	G16V2	-	5.5	6.0	6.5	dB	
	C_{inS2}	G18V2	-	5.5	6.0	6.5	dB	
V_{out2} Frequency Response	V_{inTV}	F7V2	-	10	-	-	MHz	(1) Apply a 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, measure a frequency at which the output amplitude on pin 42 is 3dB down from the 15kHz applied level.
	V_{inV1}	F10V2	-	10	-	-	MHz	
	V_{inV2}	F28V2	-	10	-	-	MHz	
	Y/V_{inS1}	F12V2	-	10	-	-	MHz	
	C_{inS1}	F14V2	-	10	-	-	MHz	
	Y/V_{inS2}	F16V2	-	10	-	-	MHz	
	C_{inS2}	F18V2	-	10	-	-	MHz	
V_{out2} Crosstalk	V_{inTV}	CT7V2	-	55	60	-	dB	(1) Apply a 3.58MHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, compare signal output from the selected pin with leakage components from nonselected pins to find a crosstalk.
	V_{inV1}	CT10V2	-	55	60	-	dB	
	V_{inV2}	CT28V2	-	55	60	-	dB	
	Y/V_{inS1}	CT12V2	-	55	60	-	dB	
	C_{inS1}	CT14V2	-	55	60	-	dB	
	Y/V_{inS2}	CT16V2	-	55	60	-	dB	
	C_{inS2}	CT18V2	-	55	60	-	dB	
Y_{out} Input Dynamic Range	V_{inTV}	VDR7Y	-	1.5	2.0	-	V _{P-P}	(1) Apply a 15kHz sine wave to each input pin. (2) In each select mode, measure an input amplitude at which the output waveform on pin 36 begins to be distorted.
	V_{inV1}	VDR10Y	-	1.5	2.0	-	V _{P-P}	
	V_{inV2}	VDR28Y	-	1.5	2.0	-	V _{P-P}	
	Y/V_{inS1}	VDR12Y	-	1.5	2.0	-	V _{P-P}	
	Y/V_{inS2}	VDR16Y	-	1.5	2.0	-	V _{P-P}	
	Y_{in}	VDR30Y	-	5.0	5.5	-	V _{P-P}	
Y_{out} Gain	V_{inTV}	G7Y	-	5.5	6.0	6.5	dB	(1) Apply a 15kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, find the gain between input and output.
	V_{inV1}	G10Y	-	5.5	6.0	6.5	dB	
	V_{inV2}	G28Y	-	5.5	6.0	6.5	dB	
	Y/V_{inS1}	G12Y	-	5.5	6.0	6.5	dB	
	Y/V_{inS2}	G16Y	-	5.5	6.0	6.5	dB	
	Y_{in}	G30Y	-	-0.5	0	0.5	dB	

KIA1218AN

CHARACTERISTIC	SELECT MODE	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	TEST METHOD
Y _{out} Frequency Response	V _{in} TV	F7Y	-	10	-	-	MHz	(1) Apply a 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, measure a frequency at which the output amplitude on pin 36 is 3dB down from the 15kHz applied level.
	V _{in} V1	F10Y	-	10	-	-	MHz	
	V _{in} V2	F28Y	-	10	-	-	MHz	
	Y/V _{in} S1	F12Y	-	10	-	-	MHz	
	Y/V _{in} S2	F16Y	-	10	-	-	MHz	
	Y _{in}	F30Y	-	10	-	-	MHz	
Y _{out} Crosstalk	V _{in} TV	CT7Y	-	55	60	-	dB	(1) Apply a 3.58MHz sine wave to each input pin. (2) In each select mode, measure an input amplitude at which the output waveform on pin 34 begins to be distorted.
	V _{in} V1	CT10Y	-	55	60	-	dB	
	V _{in} V2	CT28Y	-	55	60	-	dB	
	Y/V _{in} S1	CT12Y	-	55	60	-	dB	
	Y/V _{in} S2	CT16Y	-	55	60	-	dB	
	Y _{in}	CT30Y	-	55	60	-	dB	
C _{out} Input Dynamic Range	V _{in} TV	VDR7C	-	1.5	2.0	-	V _{P-P}	(1) Apply a 15kHz sine wave to each input pin. (2) In each select mode, measure an input amplitude at which the output waveform on pin 34 begins to be distorted.
	V _{in} V1	VDR10C	-	1.5	2.0	-	V _{P-P}	
	V _{in} V2	VDR28C	-	1.5	2.0	-	V _{P-P}	
	Y/V _{in} S1	VDR12C	-	1.5	2.0	-	V _{P-P}	
	C _{in} S1	VDR14C	-	1.5	2.0	-	V _{P-P}	
	Y/V _{in} S2	VDR16C	-	1.5	2.0	-	V _{P-P}	
	C _{in} S2	VDR18C	-	1.5	2.0	-	V _{P-P}	
C _{in}	VDR32C	-	5.0	5.5	-	V _{P-P}		
C _{out} Gain	V _{in} TV	G7C2	-	5.5	6.0	6.5	dB	(1) Apply a 15kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, find the gain between input and output.
	V _{in} V1	G10C	-	5.5	6.0	6.5	dB	
	V _{in} V2	G28C	-	5.5	6.0	6.5	dB	
	Y/V _{in} S1	G12C	-	5.5	6.0	6.5	dB	
	C _{in} S1	G14C	-	5.5	6.0	6.5	dB	
	Y/V _{in} S2	G16C	-	5.5	6.0	6.5	dB	
	C _{in} S2	G18C	-	5.5	6.0	6.5	dB	
	C _{in}	G32C	-	-0.5	0	0.5	dB	

KIA1218AN

CHARACTERISTIC	SELECT MODE	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	TEST METHOD
Y _{out} Frequency Response	V _{in} TV	F7Y	-	10	-	-	MHz	(1) Apply a 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, measure a frequency at which the output amplitude on pin 34 is 3dB down from the 15kHz applied level.
	V _{in} V1	F10Y	-	10	-	-	MHz	
	V _{in} V2	F28Y	-	10	-	-	MHz	
	Y/V _{in} S1	F12Y	-	10	-	-	MHz	
	C _{in} S1	F14Y	-	10	-	-	MHz	
	Y/V _{in} S2	F16Y	-	10	-	-	MHz	
	C _{in} S2	F18Y	-	10	-	-	MHz	
	C _{in}	F32Y	-	10	-	-	MHz	
C _{out} Crosstalk	V _{in} TV	CT7C	-	55	60	-	dB	(1) Apply a 3.58MHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, compare signal output from the selected pin with leakage components from nonselected pins to find a crosstalk.
	V _{in} V1	CT10C	-	55	60	-	dB	
	V _{in} V2	CT28C	-	55	60	-	dB	
	Y/V _{in} S1	CT12C	-	55	60	-	dB	
	C _{in} S1	CT14C	-	55	60	-	dB	
	Y/V _{in} S2	CT16C	-	55	60	-	dB	
	C _{in} S2	CT18C	-	55	60	-	dB	
	C _{in}	CT32C	-	55	60	-	dB	
Det Select Input Dynamic Range	V _{in} TV	VDR7D	-	5.0	5.5	-	V	(1) Apply a 15kHz sine wave to each input pin. (2) In each select mode, measure an input amplitude at which the output waveform on pin 4 begins to be distorted.
	V _{in} V1	VDR10D	-	5.0	5.5	-	V	
	V _{in} V2	VDR28D	-	5.0	5.5	-	V	
	Y/V _{in} S1	VDR12D	-	5.0	5.5	-	V	
	V _{out} 1	VDR38D	-	1.5	2.0	-	V	
	V _{out} 2	VDR42D	-	1.5	2.0	-	V	
	Y _{out}	VDR36D	-	1.2	1.8	-	V	
	C _{out}	VDR34D	-	1.2	1.8	-	V	
Det Select Gain	V _{in} TV	G7D	-	-0.5	0	0.5	dB	(1) Apply a 15kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, find the gain between input and output.
	V _{in} V1	G10D	-	-0.5	0	0.5	dB	
	V _{in} V2	G28D	-	-0.5	0	0.5	dB	
	Y/V _{in} S1	G12D	-	-0.5	0	0.5	dB	
	V _{out} 1	G38D	-	-0.1	0	0.1	dB	
	V _{out} 2	G42D	-	-0.1	0	0.1	dB	
	Y _{out}	G36D	-	-0.1	0	0.1	dB	
	C _{out}	G34D	-	-0.1	0	0.1	dB	

KIA1218AN

CHARACTERISTIC	SELECT MODE	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	TEST METHOD
R _{out1} Input Dynamic Range	R _{in} TV	VDR6R1	-	6.0	6.5	-	V _{P-P}	(1) Apply a 1kHz sine wave to each input pin. (2) In each select mode, measure an input amplitude at which the output waveform on pin 35 begins to be distorted.
	R _{in} V1	VDR8R1	-	6.0	6.5	-	V _{P-P}	
	R _{in} V2	VDR31R1	-	6.0	6.5	-	V _{P-P}	
	R _{in} S1	VDR13R1	-	6.0	6.5	-	V _{P-P}	
	R _{in} S2	VDR17R1	-	6.0	6.5	-	V _{P-P}	
R _{out1} Gain	R _{in} TV	G6R1	-	-0.5	0	0.5	dB	(1) Apply a 1kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, find the gain between input and output.
	R _{in} V1	G9R1	-	-0.5	0	0.5	dB	
	R _{in} V2	G31R1	-	-0.5	0	0.5	dB	
	R _{in} S1	G13R1	-	-0.5	0	0.5	dB	
	R _{in} S2	G17R1	-	-0.5	0	0.5	dB	
R _{out1} Frequency Response	R _{in} TV	F6R1	-	0.1	2.0	-	MHz	(1) Apply a 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, measure a frequency at which the output amplitude on pin 35 is 3dB down from the 1kHz applied level.
	R _{in} V1	F9R1	-	0.1	2.0	-	MHz	
	R _{in} V2	F31R1	-	0.1	2.0	-	MHz	
	R _{in} S1	F13R1	-	0.1	2.0	-	MHz	
	R _{in} S2	F17R1	-	0.1	2.0	-	MHz	
R _{out1} Crosstalk	R _{in} TV	CT6R1	-	70	100	-	dB	(1) Apply a 1kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, compare signal output from the selected pin with leakage components from nonselected pins to find a crosstalk.
	R _{in} V1	CT9R1	-	70	100	-	dB	
	R _{in} V2	CT31R1	-	70	100	-	dB	
	R _{in} S1	CT13R1	-	70	100	-	dB	
	R _{in} S2	CT17R1	-	70	100	-	dB	
R _{out1} Mute Attenuation	R _{in} TV	M6R1	-	70	100	-	dB	(1) Apply a 1kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, compare the output amplitudes on pin 37 when mute is turned on and turned off to find mute attenuation.
	R _{in} V1	M9R1	-	70	100	-	dB	
	R _{in} V2	M31R1	-	70	100	-	dB	
	R _{in} S1	M13R1	-	70	100	-	dB	
	R _{in} S2	M17R1	-	70	100	-	dB	

KIA1218AN

CHARACTERISTIC	SELECT MODE	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	TEST METHOD
L_{out2} Input Dynamic Range	$L_{in}TV$	VDR5L2	-	6.0	6.5	-	V_{P-P}	(1) Apply a 1kHz sine wave to each input pin. (2) In each select mode, measure an input amplitude at which the output waveform on pin 35 begins to be distorted.
	$L_{in}V1$	VDR8L2	-	6.0	6.5	-	V_{P-P}	
	$L_{in}V2$	VDR29L2	-	6.0	6.5	-	V_{P-P}	
	$L_{in}S1$	VDR11L2	-	6.0	6.5	-	V_{P-P}	
	$L_{in}S2$	VDR15L2	-	6.0	6.5	-	V_{P-P}	
L_{out1} Gain	$L_{in}TV$	G5L2	-	-0.5	0	0.5	dB	(1) Apply a 1kHz, $1.0V_{P-P}$ sine wave to each input pin. (2) In each select mode, find the gain between input and output.
	$L_{in}V1$	G8L2	-	-0.5	0	0.5	dB	
	$L_{in}V2$	G29L2	-	-0.5	0	0.5	dB	
	$L_{in}S1$	G11L2	-	-0.5	0	0.5	dB	
	$L_{in}S2$	G15L2	-	-0.5	0	0.5	dB	
L_{out2} Frequency Response	$L_{in}TV$	F5L2	-	0.1	2.0	-	MHz	(1) Apply a $1.0V_{P-P}$ sine wave to each input pin. (2) In each select mode, measure a frequency at which the output amplitude on pin 35 is 3dB down from the 1kHz applied level.
	$L_{in}V1$	F8L2	-	0.1	2.0	-	MHz	
	$L_{in}V2$	F29L2	-	0.1	2.0	-	MHz	
	$L_{in}S1$	F11L2	-	0.1	2.0	-	MHz	
	$L_{in}S2$	F15L2	-	0.1	2.0	-	MHz	
L_{out2} Crosstalk	$L_{in}TV$	CT5L2	-	70	100	-	dB	(1) Apply a 1kHz, $1.0V_{P-P}$ sine wave to each input pin. (2) In each select mode, compare signal output from the selected pin with leakage components from nonselected pins to find a crosstalk.
	$L_{in}V1$	CT8L2	-	70	100	-	dB	
	$L_{in}V2$	CT29L2	-	70	100	-	dB	
	$L_{in}S1$	CT11L2	-	70	100	-	dB	
	$L_{in}S2$	CT15L2	-	70	100	-	dB	
L_{out2} Mute Attenuation	$L_{in}TV$	M5L2	-	70	100	-	dB	(1) Apply a 1kHz, $1.0V_{P-P}$ sine wave to each input pin. (2) In each select mode, compare the output amplitudes on pin 1 when mute is turned on and turned off to find mute attenuation.
	$L_{in}V1$	M8L2	-	70	100	-	dB	
	$L_{in}V2$	M29L2	-	70	100	-	dB	
	$L_{in}S1$	M11L2	-	70	100	-	dB	
	$L_{in}S2$	M15L2	-	70	100	-	dB	

KIA1218AN

CHARACTERISTIC	SELECT MODE	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	TEST METHOD
R _{out2} Input Dynamic Range	R _{in} TV	VDR6R2	-	6.0	6.5	-	V _{P-P}	(1) Apply a 1kHz sine wave to each input pin. (2) In each select mode, measure an input amplitude at which the output waveform on pin 2 begins to be distorted.
	R _{in} V1	VDR9R2	-	6.0	6.5	-	V _{P-P}	
	R _{in} V2	VDR31R2	-	6.0	6.5	-	V _{P-P}	
	R _{in} S1	VDR13R2	-	6.0	6.5	-	V _{P-P}	
	R _{in} S2	VDR17R2	-	6.0	6.5	-	V _{P-P}	
R _{out2} Gain	R _{in} TV	G6R2	-	-0.5	0	0.5	dB	(1) Apply a 1kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, find the gain between input and output.
	R _{in} V1	G9R2	-	-0.5	0	0.5	dB	
	R _{in} V2	G31R2	-	-0.5	0	0.5	dB	
	R _{in} S1	G13R2	-	-0.5	0	0.5	dB	
	R _{in} S2	G17R2	-	-0.5	0	0.5	dB	
R _{out2} Frequency Response	R _{in} TV	F6R2	-	0.1	2.0	-	MHz	(1) Apply a 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, measure a frequency at which the output amplitude on pin 2 is 3dB down from the 1kHz applied level.
	R _{in} V1	F9R2	-	0.1	2.0	-	MHz	
	R _{in} V2	F31R2	-	0.1	2.0	-	MHz	
	R _{in} S1	F13R2	-	0.1	2.0	-	MHz	
	R _{in} S2	F17R2	-	0.1	2.0	-	MHz	
R _{out2} Crosstalk	R _{in} TV	CT6R2	-	70	100	-	dB	(1) Apply a 1kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, compare signal output from the selected in with leakage components from nonselected pins to find a crosstalk.
	R _{in} V1	CT9R2	-	70	100	-	dB	
	R _{in} V2	CT31R2	-	70	100	-	dB	
	R _{in} S1	CT13R2	-	70	100	-	dB	
	R _{in} S2	CT17R2	-	70	100	-	dB	
R _{out2} Mute Attenuation	R _{in} TV	M6R2	-	70	100	-	dB	(1) Apply a 1kHz, 1.0V _{P-P} sine wave to each input pin. (2) In each select mode, compare signal output amplitudes on pin 2 when mute is turned on and turned off to find mute attenuation.
	R _{in} V1	M9R2	-	70	100	-	dB	
	R _{in} V2	M31R2	-	70	100	-	dB	
	R _{in} S1	M13R2	-	70	100	-	dB	
	R _{in} S2	M17R2	-	70	100	-	dB	
L _{out} TV Input Dynamic Range	L _{in} TV	VDR5LTV	-	6.0	6.5	-	V _{P-P}	While applying a 1kHz sine wave to pin 5, measure an input amplitude at which the output waveform on pin 40 begins to be distorted.

KIA1218AN

CHARACTERISTIC	SELECT MODE	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	TEST METHOD
L_{outTV} Gain	L_{inTV}	G5LTV	-	-0.5	0	0.5	V _{P-P}	While applying a 1kHz 1.0V _{P-P} sine wave to pin 5, find the gain between pins 5 and 40.
L_{outTV} Frequency Response	L_{inTV}	F5LTV	-	0.1	2.0	-	MHz	While applying a 1.0V _{P-P} sine wave to pin 5, measure a frequency at which the output waveform on pin 40 is 3dB down from the 1kHz applied level.
L_{outTV} Crosstalk	L_{inTV}	CT5LTV	-	70	100	-	dB	(1) Apply a 1kHz, 1.0V _{P-P} sine wave to each input pin. (2) Compare the output amplitudes when L_{inTV} is selected with leakage components from nonselected pins to find a crosstalk.
	L_{inV1}	CT8LTV	-	70	100	-	dB	
	L_{inV2}	CT29LTV	-	70	100	-	dB	
	L_{inS1}	CT11LTV	-	70	100	-	dB	
	L_{inS2}	CT15LTV	-	70	100	-	dB	
L_{outTV} Mute Attenuation	L_{inTV}	M5LTV	-	70	100	-	dB	While applying a 1kHz sine 1.0V _{P-P} sine wave to pin 5, compare the output amplitudes on pin 40 when mute is turned on an turned off to find mute attenuation.
R_{outTV} Input Dynamic Range	R_{inTV}	VDR6RTV	-	6.0	6.5	-	V _{P-P}	While applying a 1kHz sine wave to pin 6, measure an input amplitude at which the output waveform on pin 39 begins to be distorted.
R_{outTV} Gain	R_{inTV}	G6RTV	-	-0.5	0	0.5	dB	While applying a 1kHz 1.0V _{P-P} sine wave to pin 6, find the gain between pins 6 and 39.
R_{outTV} Frequency Response	R_{inTV}	F6RTV	-	0.1	2.0	-	MHz	While applying a 1.0V _{P-P} sine wave to pin 6, measure a frequency at which the output waveform on pin 39 is 3dB down from the 1kHz applied level.

KIA1218AN

CHARACTERISTIC	SELECT MODE	SYMBOL	TEST CIRCUIT	MIN.	TYP.	MAX.	UNIT	TEST METHOD
R _{out} TV Crosstalk	R _{in} TV	CT6RTV	-	70	100	-	dB	(1) Apply a 1kHz, 1.0V _{P-P} sine wave to each input pin. (2) Compare the output amplitudes when R _{in} TV is selected with leakage components from nonselected pins to find a crosstalk.
	R _{in} V1	CT9RTV	-	70	100	-	dB	
	R _{in} V2	CT31RTV	-	70	100	-	dB	
	R _{in} S1	CT13RTV	-	70	100	-	dB	
	R _{in} S2	CT17RTV	-	70	100	-	dB	
R _{out} TV Mute Attenuation	R _{in} TV	M6RTV	-	70	100	-	dB	While applying a 1kHz, 1.0V _{P-P} sine wave to pin 6, compare the output amplitudes on pin 39 when mute is turned on and turned off to find mute attenuation

KIA1218AN

APPLICATION CIRCUIT

