

DC MOTOR SPEED CONTROLLER FOR CASSETTE
TAPE RECORDER SYSTEM

The KIA6903P is a monolithic IC developed for speed control of general purpose DC motors. This IC consist of a reference voltage generator, current multiplier, comparator and start circuit.

The IC controls the speed of a DC motor by detecting counter electromotive force from the DC motor.

FEATURES

- Wide Range of Working Power Supply Voltage.
($V_{CC}=3.5 \sim 18V$)
- Very Large Starting Torque at the low Voltage.
- Large Allowable Loss due to Effective Utilization of Substrate Radiation.
- Usable for Various DC Motors by Means of Changing Constants of the External Components.

APPLICATION



- Radio Cassette Tape Recorders

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ C$)

PARAMETERS	SYMBOL	LIMITS	UNIT	CONDITIONS
Supply Voltage	V_{CC}	18	V	-
Power Dissipation	P_D	1.4*	W	PCB:9 C_m^2 . $T=1.0$

Note : Derated above $T_a=25^\circ C$ in the proportion of 11.2mW/ $^\circ C$.

BLOCK DIAGRAM

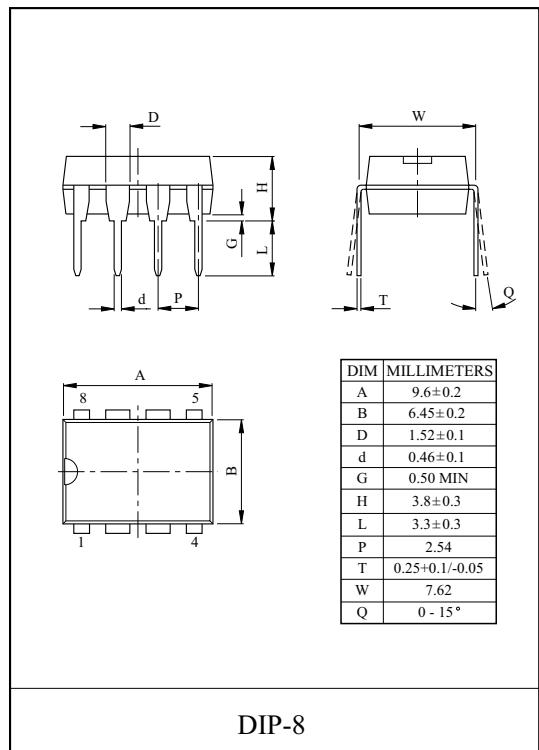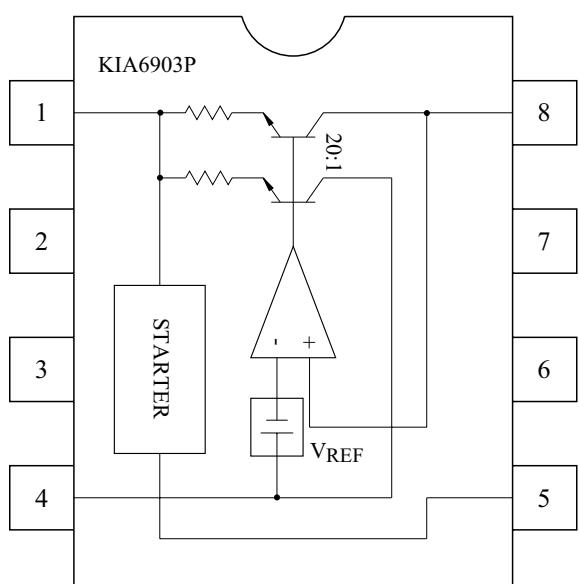


KIA6903P


ELECTRICAL CHARACTERISTICS (V_{CC}=12V, Ta=25°C)

CHARACTERISTICS	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Bias Current	I ₄	Fig.1(d)	R _M =180 Ω	0.5	0.8	1.2	mA
Output Saturation Voltage	V _{sat}	Fig.1(c)	V _{IN} =4.2V, R _M =4.4 Ω	-	1.5	2.0	V
Reference Voltage	V _{REF}	Fig.1(a)	I _M =10mA	1.10	1.27	1.40	V
Current Ratio	K	Fig.1(b)	R _{M1} =44 Ω, R _{M2} =33 Ω	18	20	22	-
Reference Voltage Variance-Power Supply Voltage Variance	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta V_{CC}$	Fig.1(a)	I _M =100mA, V _{CC} =6.3 ~ 18V	-	0.06	-	%/V
Current Ratio Variance-Power Supply Voltage Variance	$\frac{\Delta K}{K} / \Delta V_{CC}$	Fig.1(b)	I _M =100mA, V _{CC} =6.3 ~ 18V	-	0.4	-	%/V
Reference Voltage Variance-Motor Current Variance	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta I_M$	Fig.1(a)	I _M =30 ~ 200mA	-	-0.02	-	%/mA
Current Ratio Variance-Motor Current Variance	$\frac{\Delta K}{K} / \Delta I_M$	Fig.1(b)	I _M =30 ~ 200mA	-	-0.02	-	%/mA
Reference Voltage Variance-Ambient Temperature Variance	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta T_a$	Fig.1(a)	I _M =100mA, Ta=-25 ~ 75 °C	-	0.01	-	%/ °C
Current Ratio Variance-Ambient Temperature Variance	$\frac{\Delta K}{K} / \Delta T_a$	Fig.1(b)	I _M =100mA, Ta=-25 ~ 75 °C	-	0.01	-	%/ °C

TEST CIRCUIT

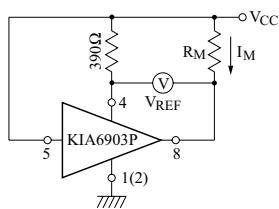


(a)

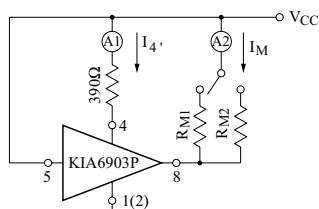


(b)

$$K = \frac{I_M (SW2) - I_M (SW1)}{I_4' (SW2) - I_4' (SW1)}$$

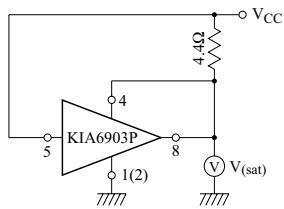


(c)

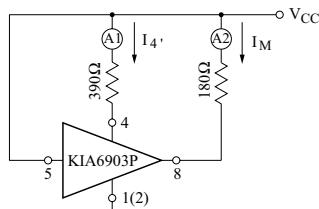

$$I_4 = I_4' - \frac{I_M}{K}$$

APPLICATION CIRCUIT

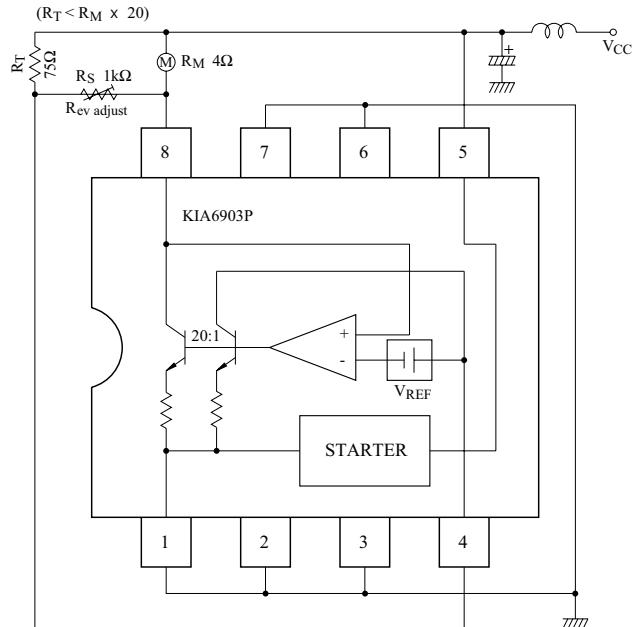

* ①, ②, ③, ⑥, ⑦ Pin must be connected with GND

Fig.1