

SCHMITT INVERTER


The KIC7S14FU is a high speed C²MOS SCHMITT INVERTER fabricated with silicon gate C²MOS technology. It achieves a high speed operation similar to equivalent LSTTL while maintaining the C²MOS low power dissipation. Pin Configuration and function are the same as the KIC7SU04FU but input have 25% V_{CC} hysteresis and with its schmitt trigger function, the KIC7S14FU can be used as line receivers which will receive slow input signal. Input is equipped with protection circuits against static discharge or transient excess voltage.

FEATURES


- High Speed : $t_{pd}=1\text{ns(Typ.)}$ at $V_{CC}=5\text{V}$.
- Low Power Dissipation : $I_{CC}=1\ \mu\text{A(Max.)}$ at $T_a=25\text{ }^\circ\text{C}$.
- High Noise Immunity : $V_H=1.1\text{V}$ at $V_{CC}=5\text{V}$.
- Output Drive Capability : 5 LSTTL Loads.
- Symmetrical Output Impedance : $|I_{OH}|=I_{OL}=2\text{mA}$.
- Balanced Propagation Delays : $t_{pLH} = t_{pHL}$
- Wide Operating Voltage Range : $V_{CC(oper)}=2\text{--}6\text{V}$.

MAXIMUM RATINGS (T_a=25 °C)


| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|------------------------------------|------------------|---------------------------|------|
| Supply Voltage Range | V _{CC} | -0.5 7 | V |
| DC Input Voltage | V _{IN} | -0.5 V _{CC} +0.5 | V |
| DC Output Voltage | V _{OUT} | -0.5 V _{CC} +0.5 | V |
| Input Diode Current | I _{IK} | ± 20 | mA |
| Output Diode Current | I _{OK} | ± 20 | mA |
| DC Output Current | I _{OUT} | ± 12.5 | mA |
| DC V _{CC} /Ground Current | I _{CC} | ± 50 | mA |
| Power Dissipation | P _D | 200 | mW |
| Storage Temperature | T _{stg} | -65 150 | |
| Lead Temperature (10s) | T _L | 260 | |

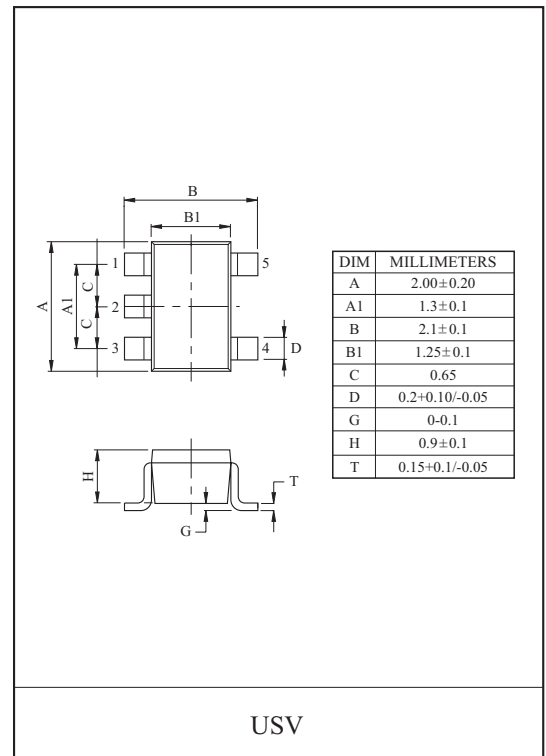

MARKING

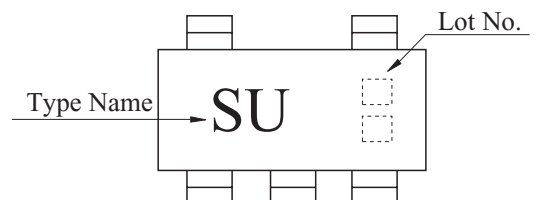


PIN CONNECTION (TOP VIEW)

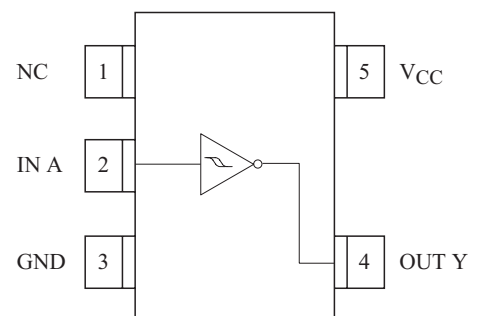

KIC7S14FU

LOGIC DIAGRAM



TRUTH TABLE

| | |
|---|---|
| A | Y |
| L | H |
| H | L |

RECOMMENDED OPERATING CONDITIONS

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|-----------------------|-----------|------------|------|
| Supply Voltage | V_{CC} | 2 6 | V |
| Input Voltage | V_{IN} | 0 V_{CC} | V |
| Output Voltage | V_{OUT} | 0 V_{CC} | V |
| Operating Temperature | T_{opr} | -40 85 | |

DC ELECTRICAL CHARACTERISTICS

| CHARACTERISTIC | SYMBOL | TEST CONDITION | Ta=25 | | | Ta=-40 85 | | UNIT | | |
|----------------------------|----------|------------------------|----------------------------------|------|------|-----------|------|-----------|---------|---|
| | | | V_{CC} | MIN. | TYP. | MAX. | MIN. | | MAX. | |
| Positive Threshold Voltage | V_P | - | 2.0 | 1.0 | 1.25 | 1.5 | 1.0 | 1.5 | V | |
| | | | 4.5 | 2.3 | 2.7 | 3.15 | 2.3 | 3.15 | | |
| | | | 6.0 | 3.0 | 3.5 | 4.2 | 3.0 | 4.2 | | |
| Negative Threshold Voltage | V_N | - | 2.0 | 0.3 | 0.65 | 0.9 | 0.3 | 0.9 | V | |
| | | | 4.5 | 1.13 | 1.6 | 2.0 | 1.13 | 2.0 | | |
| | | | 6.0 | 1.5 | 2.3 | 2.6 | 1.5 | 2.6 | | |
| Hysteresis Voltage | V_H | - | 2.0 | 0.3 | 0.6 | 1.0 | 0.3 | 1.0 | V | |
| | | | 4.5 | 0.6 | 1.1 | 1.4 | 0.6 | 1.4 | | |
| | | | 6.0 | 0.8 | 1.2 | 1.7 | 0.8 | 1.7 | | |
| High-Level Output Voltage | V_{OH} | $V_{IN}=V_{IL}$ | $I_{OH}=-20\mu A$ | 2.0 | 1.9 | 2.0 | - | 1.9 | - | V |
| | | | | 4.5 | 4.4 | 4.5 | - | 4.4 | - | |
| | | | $I_{OH}=-2mA$ $I_{OH}=-2.6mA$ | 4.5 | 4.18 | 4.31 | - | 4.13 | - | |
| | | | | 6.0 | 5.68 | 5.80 | - | 5.63 | - | |
| Low-Level Output Voltage | V_{OL} | $V_{IN}=V_{IH}$ | $I_{OL}=20\mu A$ | 2.0 | - | 0.0 | 0.1 | - | 0.1 | V |
| | | | | 4.5 | - | 0.0 | 0.1 | - | 0.1 | |
| | | | $I_{OL}=2mA$ $I_{OL}=2.6mA$ | 4.5 | - | 0.17 | 0.26 | - | 0.33 | |
| | | | | 6.0 | - | 0.18 | 0.26 | - | 0.33 | |
| Input Leakage Current | I_{IN} | $V_{IN}=V_{CC}$ or GND | 6.0 | - | - | ± 0.1 | - | ± 1.0 | μA | |
| Quiescent Supply Current | I_{CC} | $V_{IN}=V_{CC}$ or GND | 6.0 | - | - | 1.0 | - | 10.0 | | |

KIC7S14FU

AC ELECTRICAL CHARACTERISTICS (C_L=15pF, V_{CC}=5V, Ta=25)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | Ta=25 | | | UNIT |
|------------------------|------------------|----------------|-------|------|------|------|
| | | | MIN. | TYP. | MAX. | |
| Output Transition Time | t _{TLH} | - | - | 4 | 8 | ns |
| | t _{THL} | | | | | |
| Propagation Delay Time | t _{pLH} | - | - | 11 | 21 | ns |
| | t _{pHL} | | | | | |

AC ELECTRICAL CHARACTERISTICS (C_L=50pF, Input t_r=t_f=6ns)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | V _{CC} | Ta=25 | | | Ta=-40 85 | | UNIT |
|-------------------------------|--------------------------------------|----------------|-----------------|-------|------|------|-----------|------|------|
| | | | | MIN. | TYP. | MAX. | MIN. | MAX. | |
| Output Transition Time | t _{TLH} t _{THL} | - | 2.0 | - | 50 | 125 | - | 145 | ns |
| | | | 4.5 | - | 14 | 25 | - | 30 | |
| | | | 6.0 | - | 12 | 21 | - | 24 | |
| Propagation Delay Time | t _{pLH} t _{pHL} | - | 2.0 | - | 48 | 100 | - | 235 | ns |
| | | | 4.5 | - | 12 | 20 | - | 48 | |
| | | | 6.0 | - | 9 | 17 | - | 40 | |
| Input Capacitance | C _{IN} | - | - | 5 | 10 | - | 10 | pF | |
| Power Dissipation Capacitance | C _{PD} | (Note 1) | - | 28 | - | - | - | | |

Note 1 : C_{PD} is defined as the value of internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation : I_{CC(opr)}=C_{PD} · V_{CC} · f_{IN} + I_{CC}