

PRODUCT SPECIFICATION

DATE: 03/08/2005

cosmo ELECTRONICS CORPORATION	H.P LED : KLH00RGB3	NO. 61L70019	REV.
		SHEET 1 OF 7	1

1. Features

Cosmo's high power LED packages can handle up to 350-500mA DC current, and available in 625nm, 525nm, and 470nm wavelength in mono or multiple colors. These packages are formed by bonding 3 pcs of 40 mil LED chips on a 20mmx20mm metal PCB. A heat sink is mechanically screwed to the board to cool down metal surface temperature below 70°C. The main features of these packages are as follows :

- Very high flux output per LED.
- Flat PCB package. On each PCB, the quantity of LED being adjustable from 1 to 3 to meet user's need. These LEDs being connected in series.
- Very long operation life time up to 100k hours attainable, by using a proper heat sink.
- 130±10° cool beam in most packages.

2. Applications

- Outdoor and indoor architectural lighting
- Reading light (car/bus/aircraft)
- Decorative/entertainment lighting
- Bollards/Security/Garden lighting
- Traffic signal
- Portable lighting (flashlight/bicycle)
- Edge-lit signs (exit sign/point of sales)
- LCD backlights
- Light guide

3. Operation and Storage Temperature

Parameter	Symbol	Value	Unit
Operation temperature	Topr	(Data to be ready, -30~+85)	°C
Storage temperature	Tstg	(Data to be ready, -40~+110)	°C




PRODUCT SPECIFICATION

DATE: 03/08/2005

cosmo ELECTRONICS CORPORATION	H.P LED : KLH00RGB3	NO. 61L70019	REV. 1
		SHEET 2 OF 7	

4. Dimensions

●35(L)x35(W)x12(H)mm

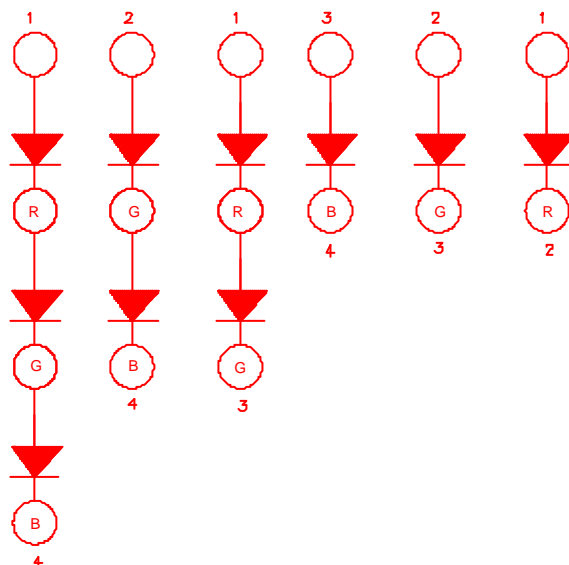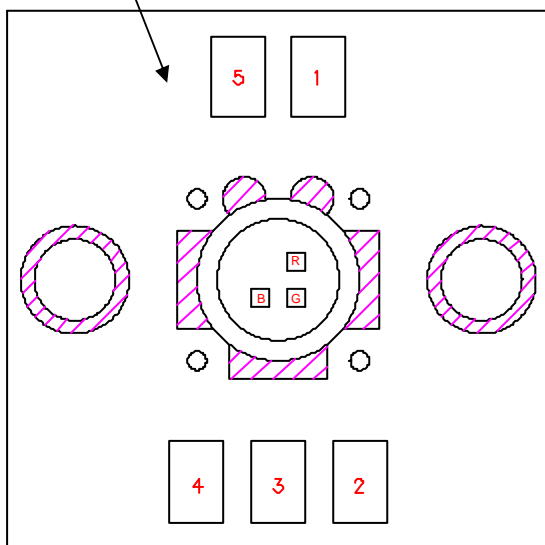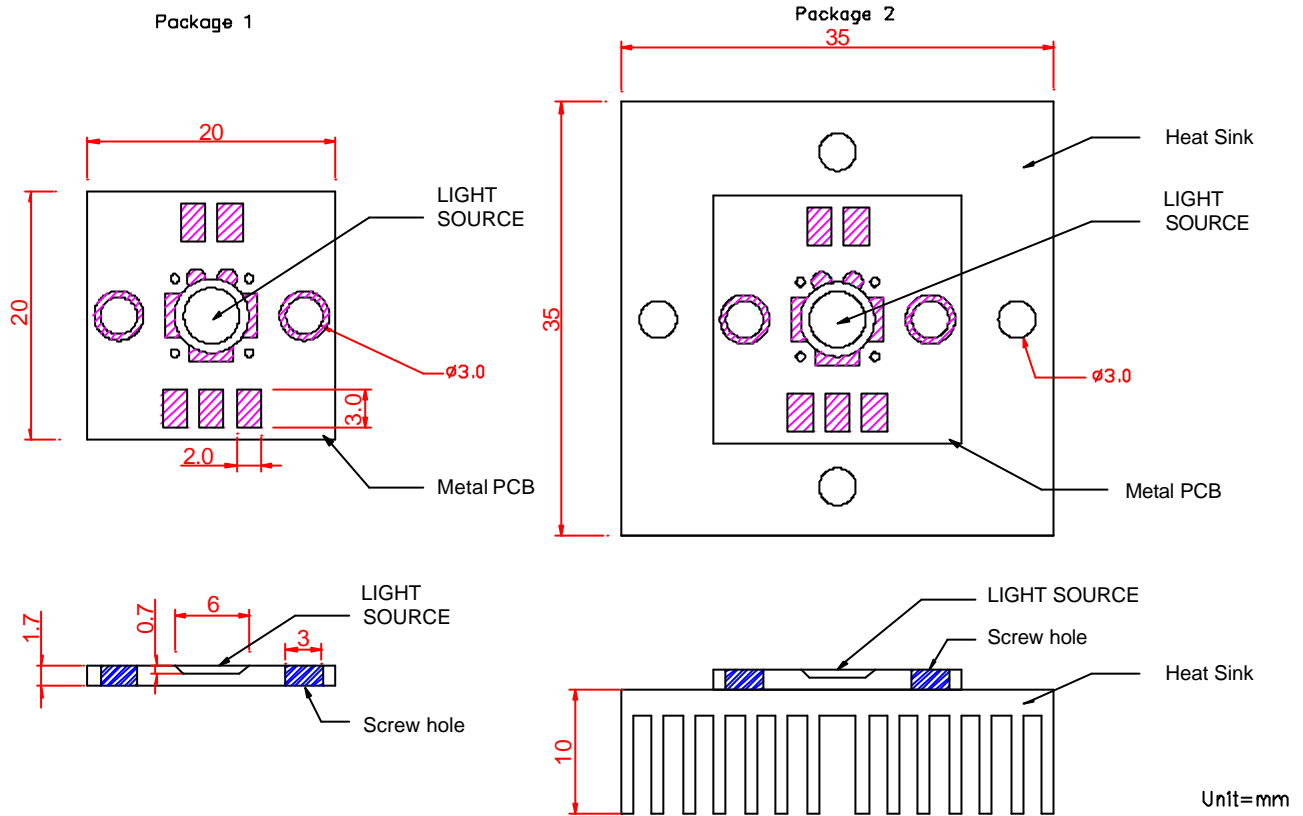

PRODUCT SPECIFICATION

DATE: 03/08/2005

cosmo ELECTRONICS CORPORATION	H.P LED : KLH00RGB3	NO. 61L70019	REV.
		SHEET 3 OF 7	1

5. Electrical & Optical Characteristics

At Ta = 25°C

Parameter	Symbol	PART NO	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	Ultra Red	KLH00RGB3	12	16	-	Lm	IF = 350mA Note 1
	Green		16	20	-		
	Blue		2	5	-		
Viewing Angle	2 1/2	Ultra Red/ Blue/Green	-	130	-	deg	Note 2
Dominant Wavelength	d	Ultra Red	-	624	-	nm	IF = 350mA Note 3
		Green	-	525	-		
		Blue	-	468	-		
Spectral Line Half-Width		Ultra Red	-	20	-	nm	-
		Green	-	35	-		
		Blue	-	30	-		
Forward Voltage	VF	Ultra Red	-	1.9	2.3	V	IF = 350mA
		Green	-	3.2	3.8		
		Blue	-	3.2	3.8		
Reverse Current	Ir	Ultra Red/ Blue/Green	-	-	100	μ A	VR = 5V

Note :

- Luminous intensity is measured with a photo detector and filter combination that follows the CIE etc - response curve. And the equipment measured luminous intensity tolerance is $\pm 5\%$.
- $2\frac{1}{2}$ is the off - axis angle at which the luminous intensity is half the axial luminous intensity.
- The dominant wavelength, λ_d is derived from the CIE chromaticity diagram and represents the color of the device.
- Caution in ESD:
Static Electricity maybe cause damages to the LED. It is recommend to use a wrist band or anti - electrostatic glove when handing the LED.

All devices, equipment and machinery must be properly grounded.

PRODUCT SPECIFICATION

DATE: 03/08/2005

cosmo

ELECTRONICS CORPORATION

H.P LED :

KLH00RGB3

NO. 61L70019


SHEET 4 OF 7

REV.

1


6. Wavelength Characteristics

- Relative spectral power intensity of white vs. wavelength ($T_a=25^\circ\text{C}$)

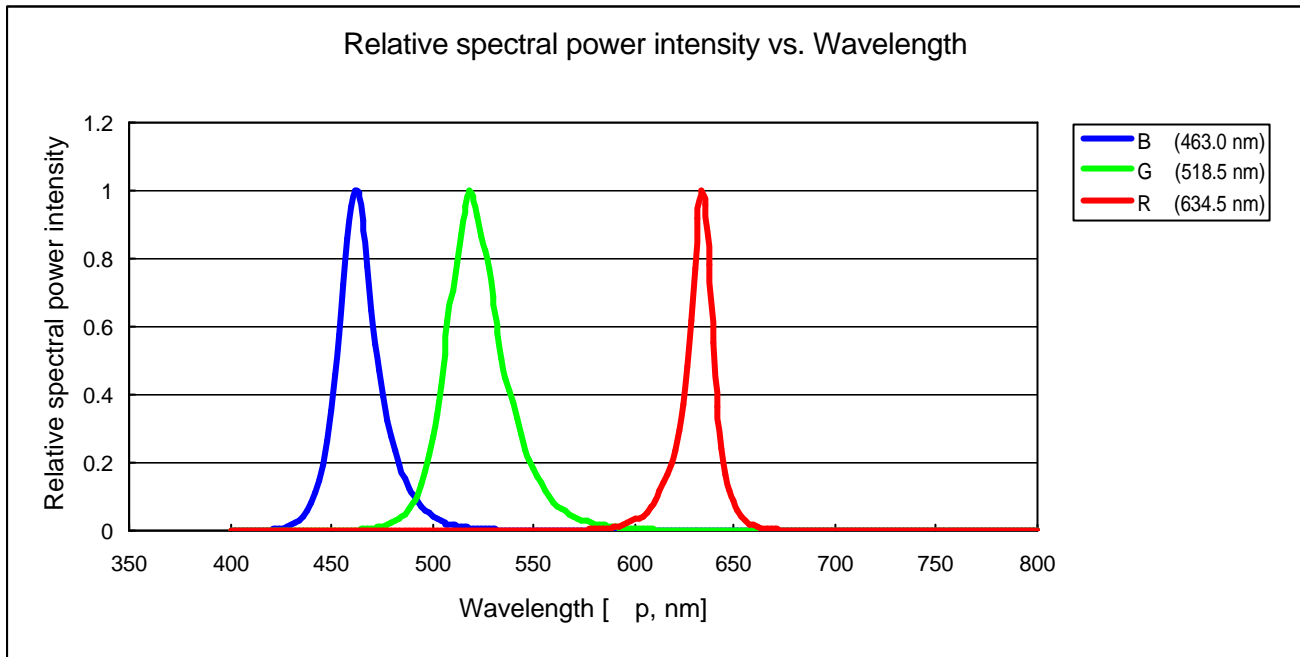

7. Light Output Characteristics

- Relative light output vs. junction temperature

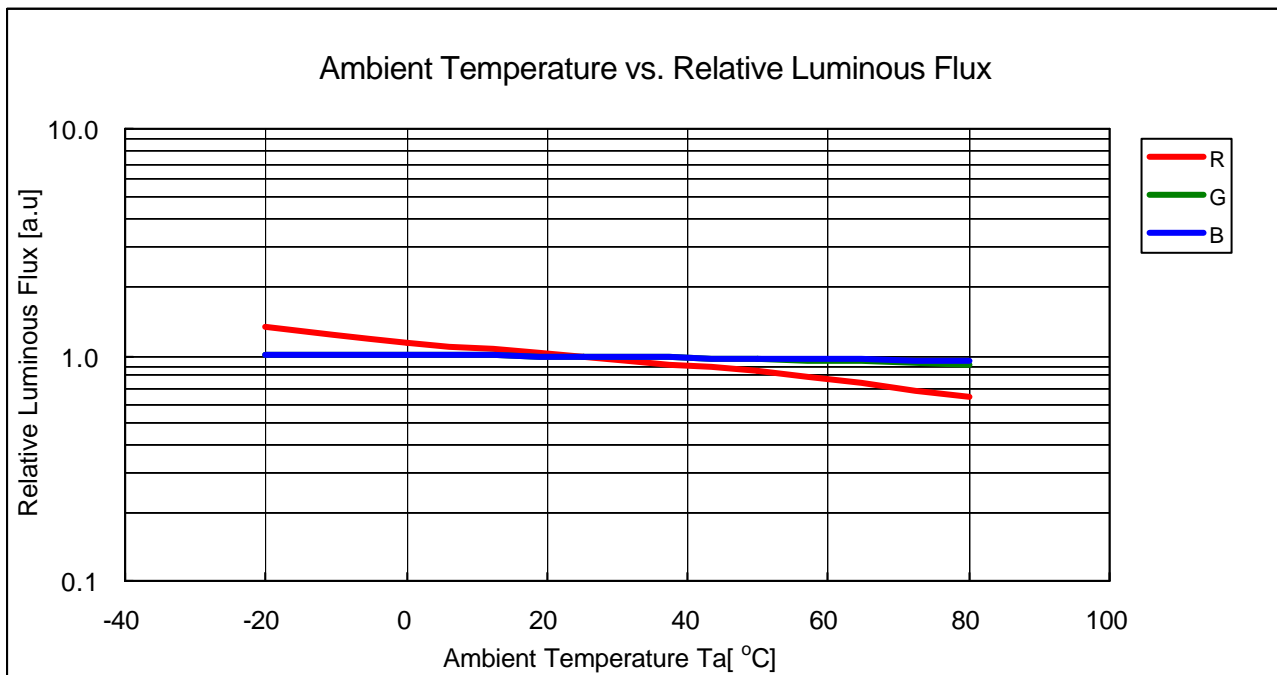

PRODUCT SPECIFICATION

DATE: 03/08/2005

cosmo

ELECTRONICS CORPORATION

H.P LED :

KLH00RGB3

NO. 61L70019


SHEET 5 OF 7

REV.


1

8. Spatial Radiation Pattern

Forward current vs. relative luminous flux ($T_a=25^\circ\text{C}$)

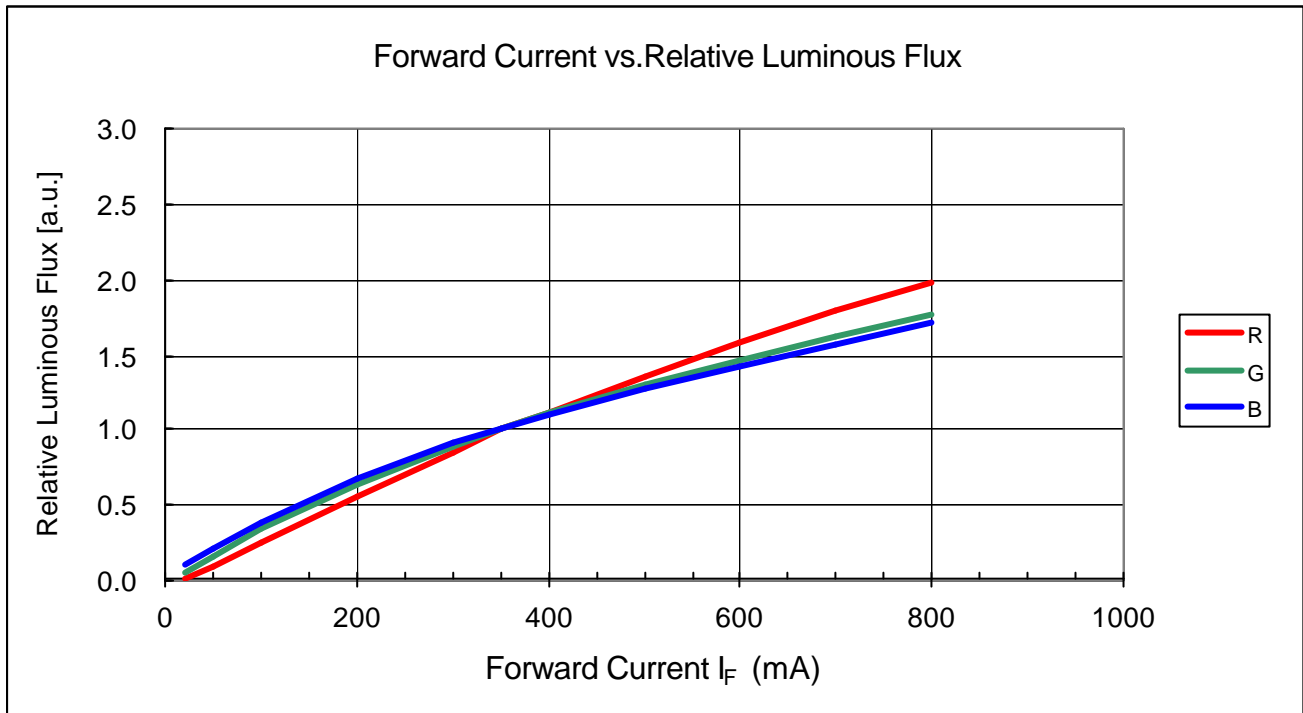

- Forward voltage vs. forward current ($T_a=25^\circ\text{C}$)

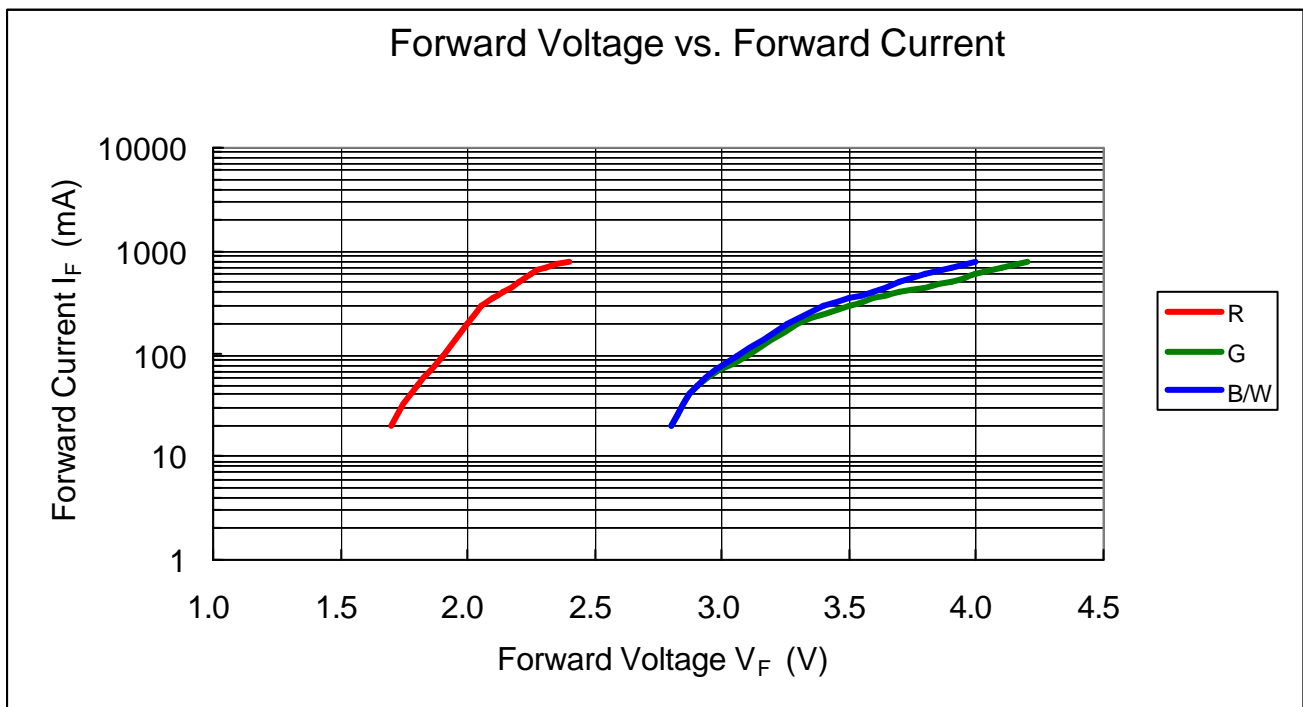

PRODUCT SPECIFICATION

DATE: 03/08/2005

cosmo

ELECTRONICS CORPORATION

H.P LED :

KLH00RGB3


NO. 61L70019

SHEET 6 OF 7

REV.


1

- Forward voltage vs. ambient temperature ($I_F=350\text{mA}$)

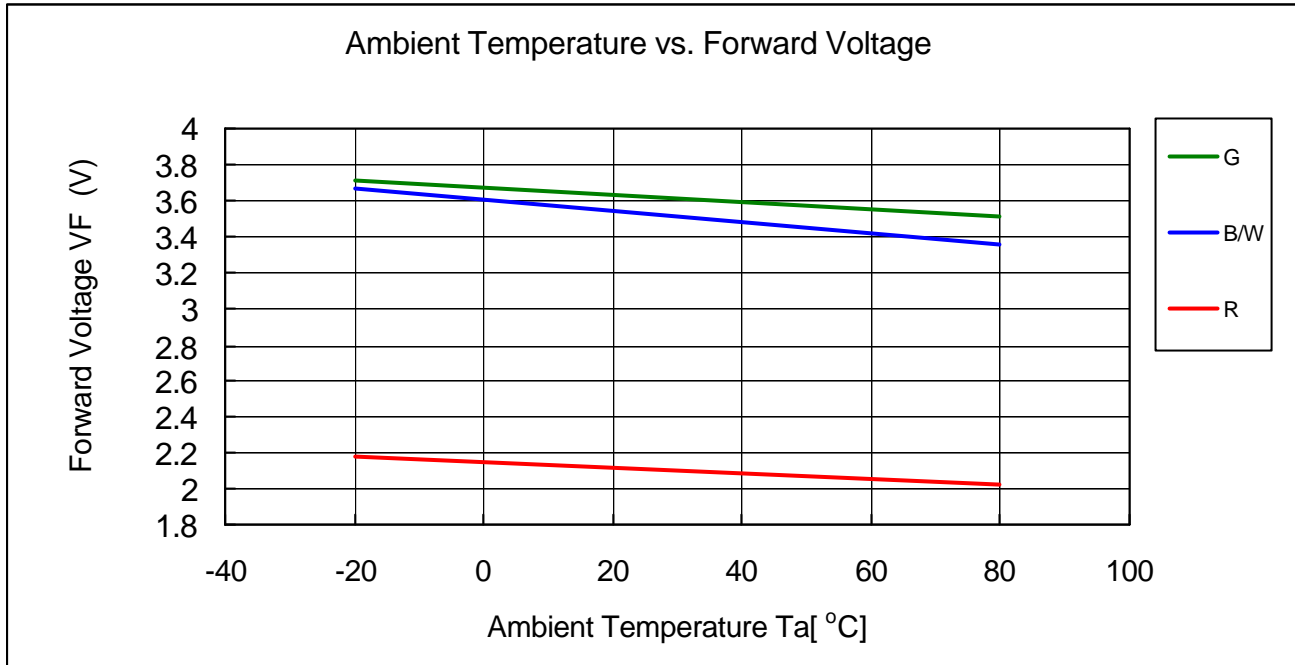

9. Spatial Radiation Pattern

- White

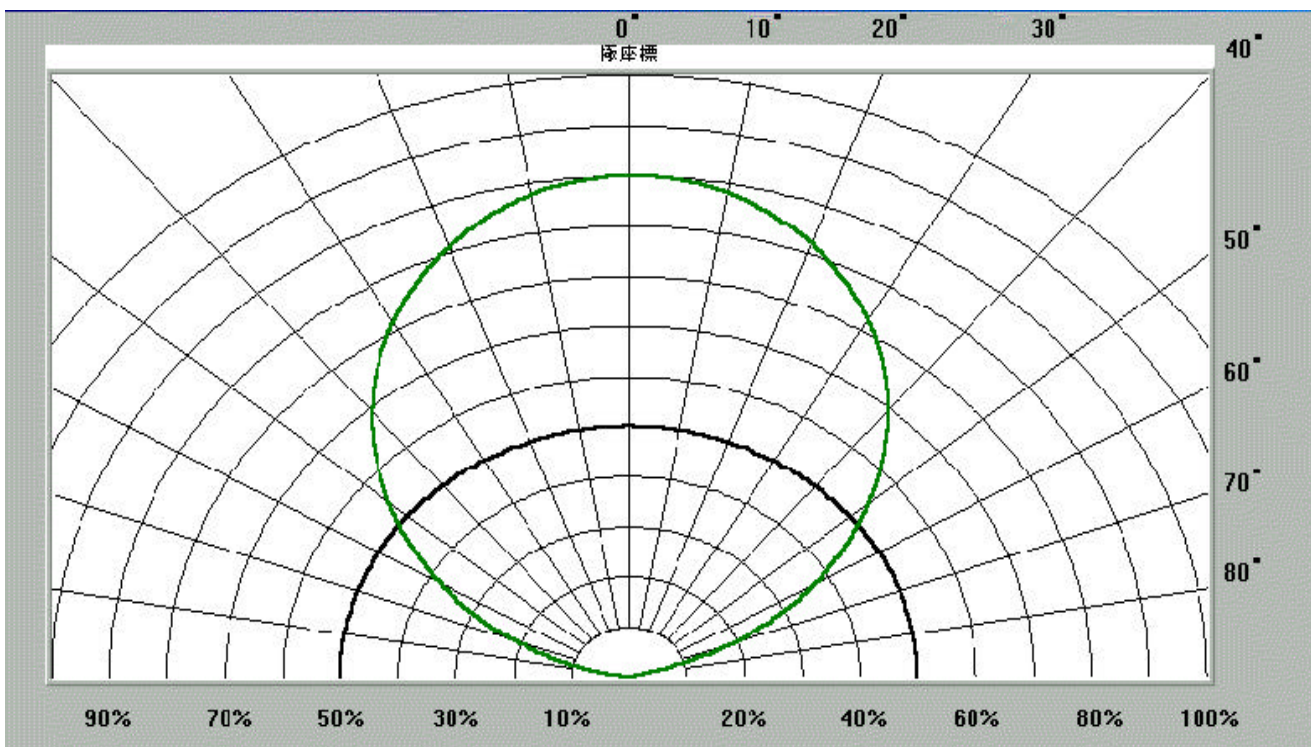

PRODUCT SPECIFICATION

DATE: 03/08/2005

cosmo ELECTRONICS CORPORATION	H.P LED :	NO. 61L70019	REV.
	KLH00RGB3	SHEET 7 OF 7	1

10. Reliability Test

Stress Test	Stress Conditions	Stress Duration	Failure Criteria	Failure rate
1.High temperature operation life	85°C at 350mA	1,000 hrs	(1)Iv< 50% degradation (2)Vf max=110% initial	0/12
2.Room temperature operation life	25°C at 350 mA	1,000 hrs		0/12
3. Low temperature operation life	-40°C at 350 mA	1,000 hrs		0/12
4. Wet high temperature operation life	85°C / 60% RH at 350 mA	1,000 hrs		0/12
5.Powered temperature cycle	(1.)-45°C/18min at 350 mA (2.)Transform /42min (3.)85°C /18min at 350 mA	200 cycles		0/12
6.Temperature Cycle	(1.)-45°C /30 min (2.)25°C /5 min (3.)120°C /30 min (4.)25°C /5 min	200 cycles		0/12
7.High temperature storage	110°C	1,000 hrs		0/12
8. Low temperature storage	-40°C	1,000 hrs		0/12
9.High temperature humidity storage	60°C / 90% RH	1,000 hrs		0/12
10.Thermal shock	(1.)-40°C /20min (2.)Transform /20sec (3.)110°C /20min	200 cycles		0/12