

# PRODUCT SPECIFICATION

DATE: 03/08/2005

**cosmo**

ELECTRONICS CORPORATION

H.P LED :

**KLH00WXX4**

NO. 61L70024

REV.

1

SHEET 1 OF 6

## 1. Features

**Cosmo's high power LED packages** can handle up to 350-500mA DC current. These packages are formed by bonding 4 pcs of 40 mil LED chips on a 20mmx20mm metal PCB. A heat sink is mechanically screwed to the board to cool down metal surface temperature below 70 °C. The main features of these packages are as follows :

- Very high flux output per LED.
- Flat PCB package. On each PCB, the quantity of LED being adjustable from 1 to 4 to meet user's need. These LEDs being connected in series.
- Very long operation life time up to 100k hours attainable, by using a proper heat sink.
- $130 \pm 10^\circ$  cool beam in most packages.

## 2. Applications

- Outdoor and indoor architectural lighting
- Reading light (car/bus/aircraft)
- Decorative/entertainment lighting
- Bollards/Security/Garden lighting
- Traffic signal
- Portable lighting (flashlight/bicycle)
- Edge-lit signs (exit sign/point of sales)
- LCD backlights
- Light guide

## 3. Operation and Storage Temperature

Parameter	Symbol	Value	Unit
Operation temperature	Topr	(Data to be ready, -30~+85)	°C
Storage temperature	Tstg	(Data to be ready, -40~+110)	°C

# PRODUCT SPECIFICATION

DATE: 03/08/2005

**cosmo**

ELECTRONICS CORPORATION

H.P LED :


**KLH00WXX4**

NO. 61L70024

REV.  
1

## 4. Dimensions

- 35(L)x35(W)x12(H)mm

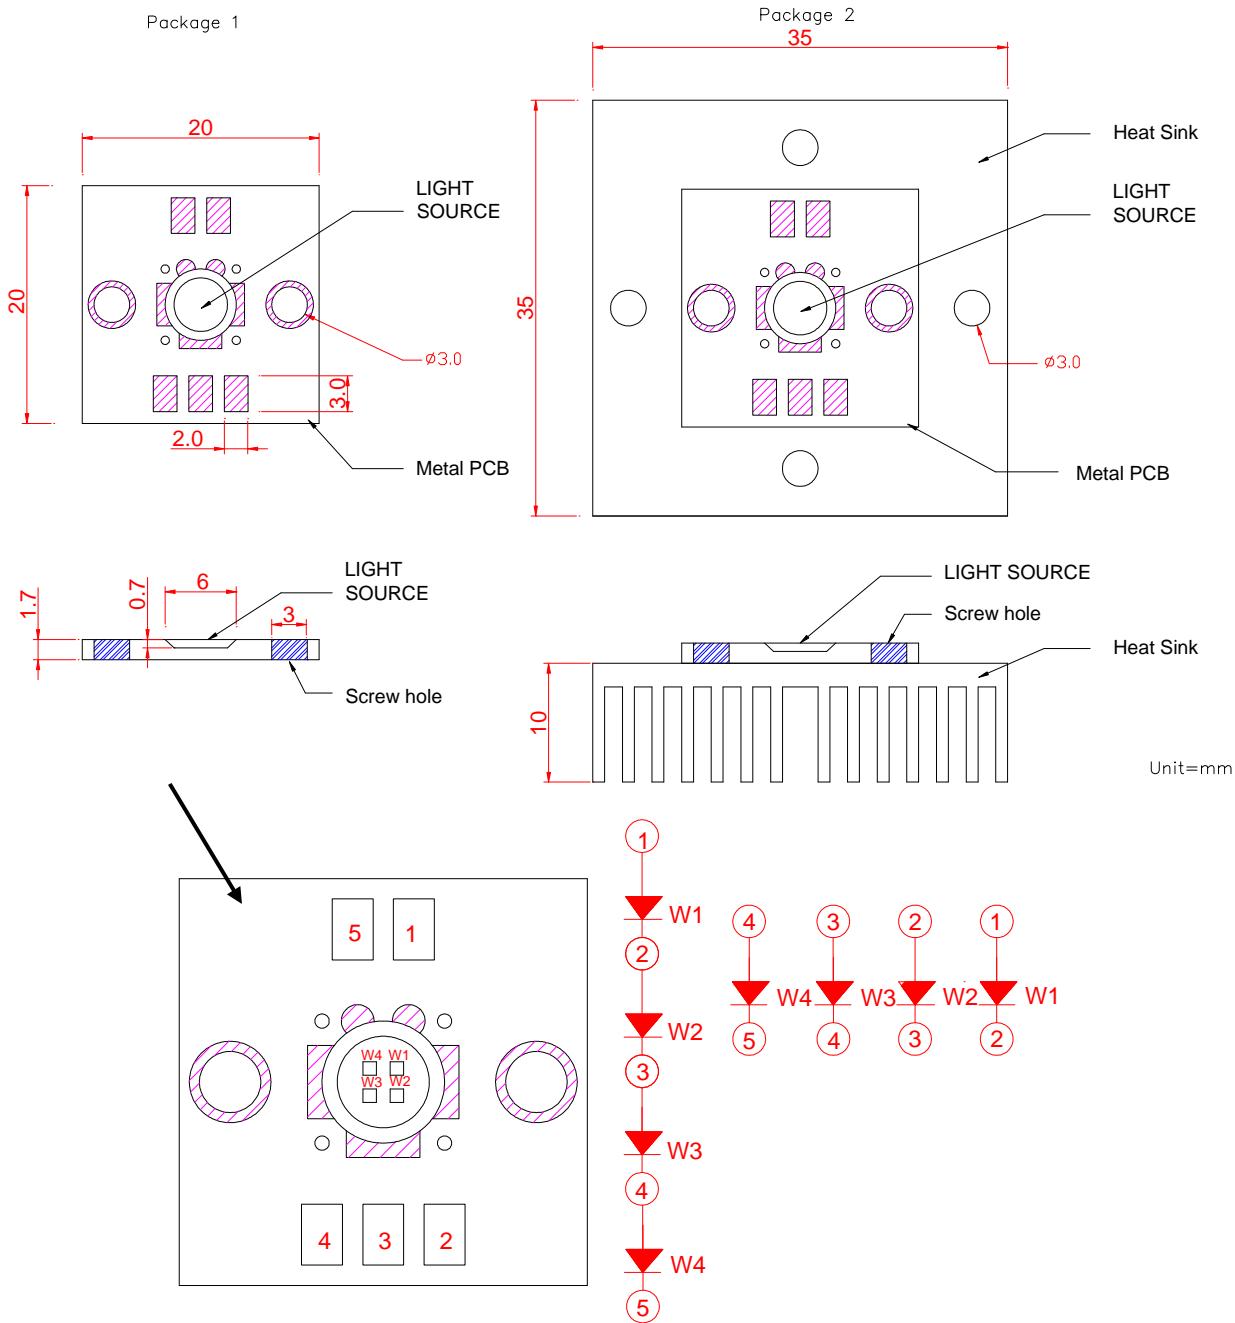

## 5. Flux Characteristics

Flux characteristics of mono color LED at 350mA, junction temperature, Ta = 25°C  
Chip quantity : 4 LEDs/PCB

Part Number	Color/Wavelength (nm)	Forward Voltage (Vf)		Luminous Flux (lm)		Wattage typ. (W)	View angle (2°)
KLH00WXX4	(x,y) = 0.28~0.35	Typ.	Max	Min	Typ.	5.4	130 ± 0°
		15.5	16	55	65		

# PRODUCT SPECIFICATION

DATE: 03/08/2005

**cosmo**

ELECTRONICS CORPORATION

H.P LED :

**KLH00WXX4**


NO. 61L70024

REV.  
1

SHEET 3 OF 6


## 6. Wavelength Characteristics

- Relative spectral power intensity of white vs. wavelength ( $T_a=25^{\circ}\text{C}$ )

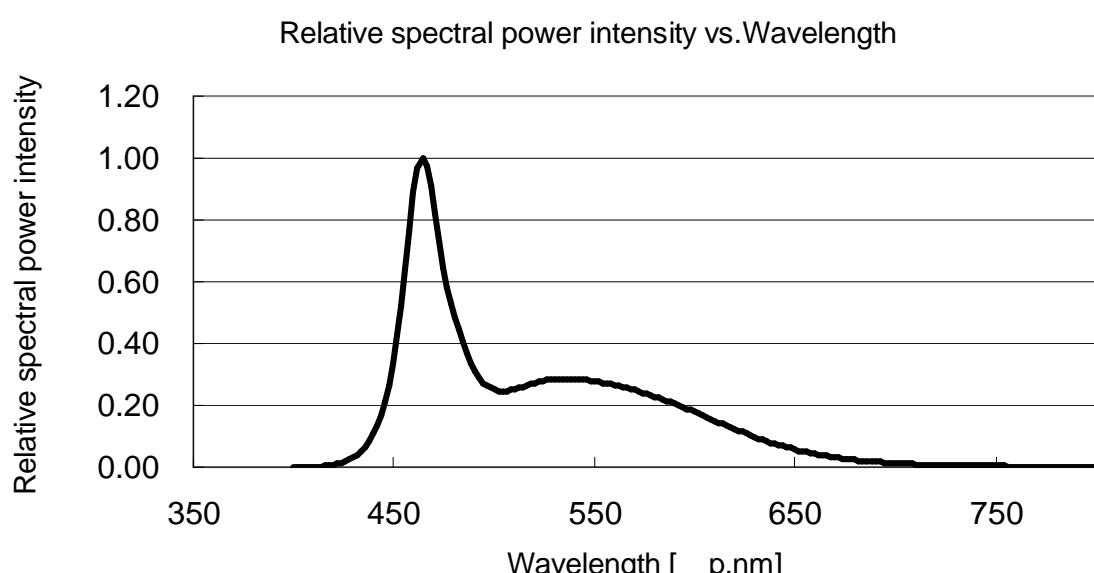

## 7. Light Output Characteristics

- Relative light output vs. junction temperature

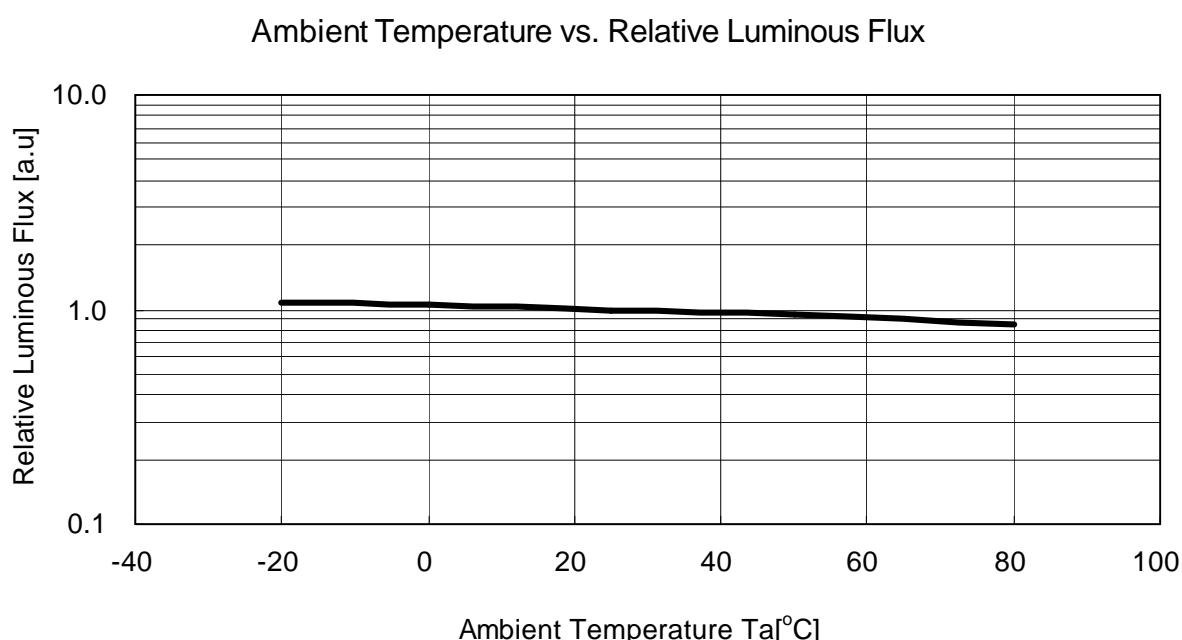

# PRODUCT SPECIFICATION

DATE: 03/08/2005

**COSMO**

ELECTRONICS CORPORATION

H.P LED :

**KLH00WXX4**

NO. 61L70024


REV.  
1

SHEET 4 OF 6

## 8. Spatial Radiation Pattern


Forward current vs. relative luminous flux ( $T_a=25^\circ\text{C}$ )

Forward Current vs. Relative Luminous Flux

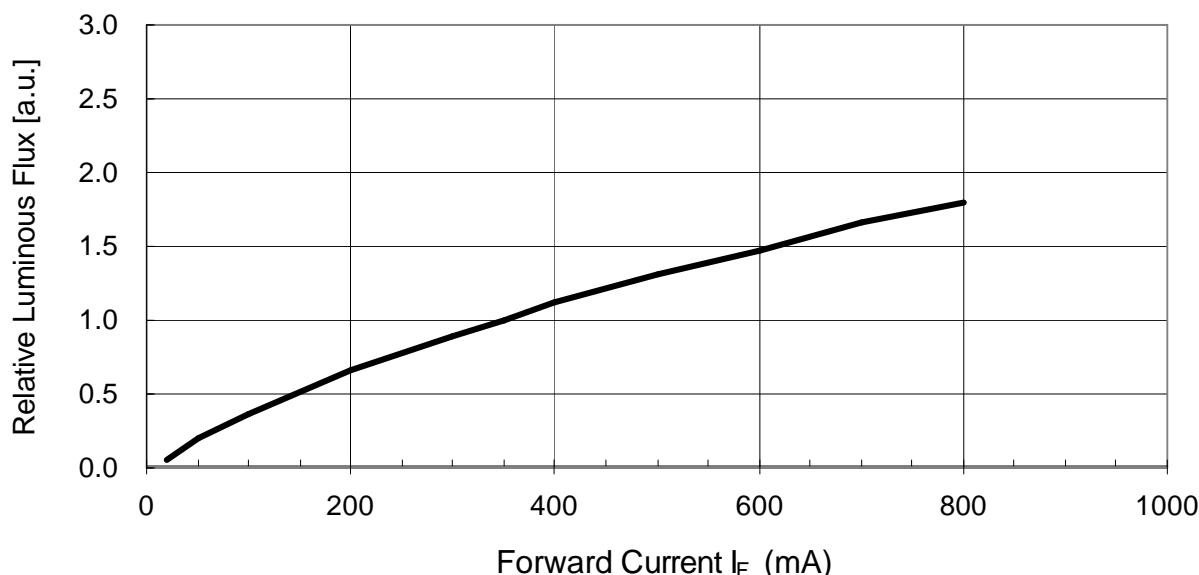

- Forward voltage vs. forward current (4 LEDs/PCB,  $T_a=25^\circ\text{C}$ )

Forward Voltage vs. Forward Current [4 chip]

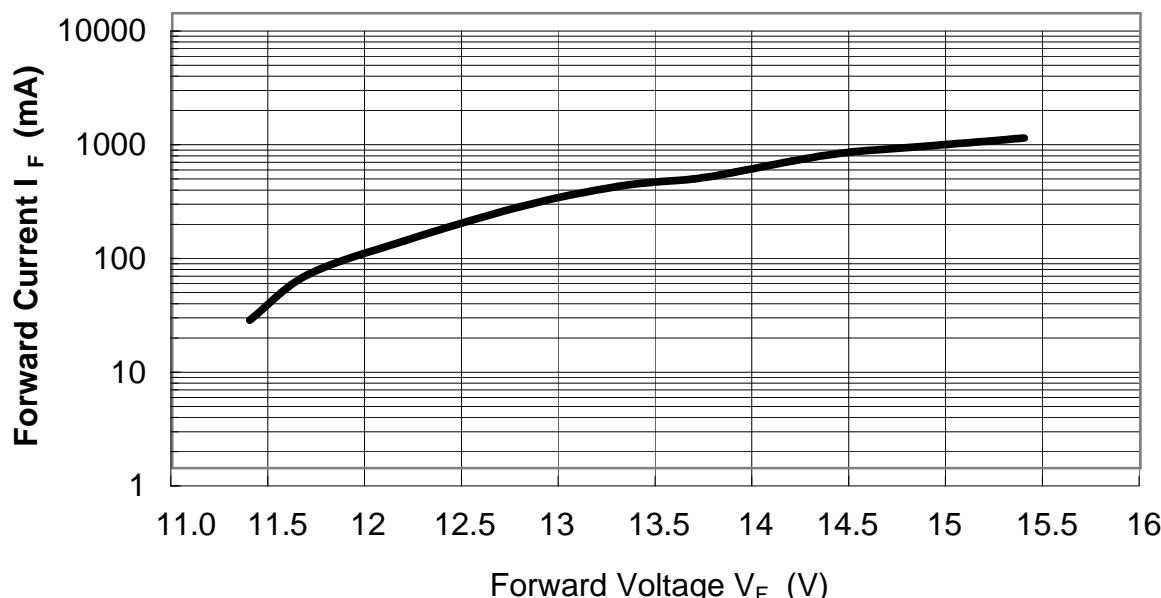

# PRODUCT SPECIFICATION

DATE: 03/08/2005

**COSMO**

ELECTRONICS CORPORATION

H.P LED :

**KLH00WXX4**


NO. 61L70024

REV.  
1

SHEET 5 OF 6


- Forward voltage vs. ambient temperature (4 LED/PCB,  $I_F=350mA$ )

Ambient Temperature vs. Forward Voltage

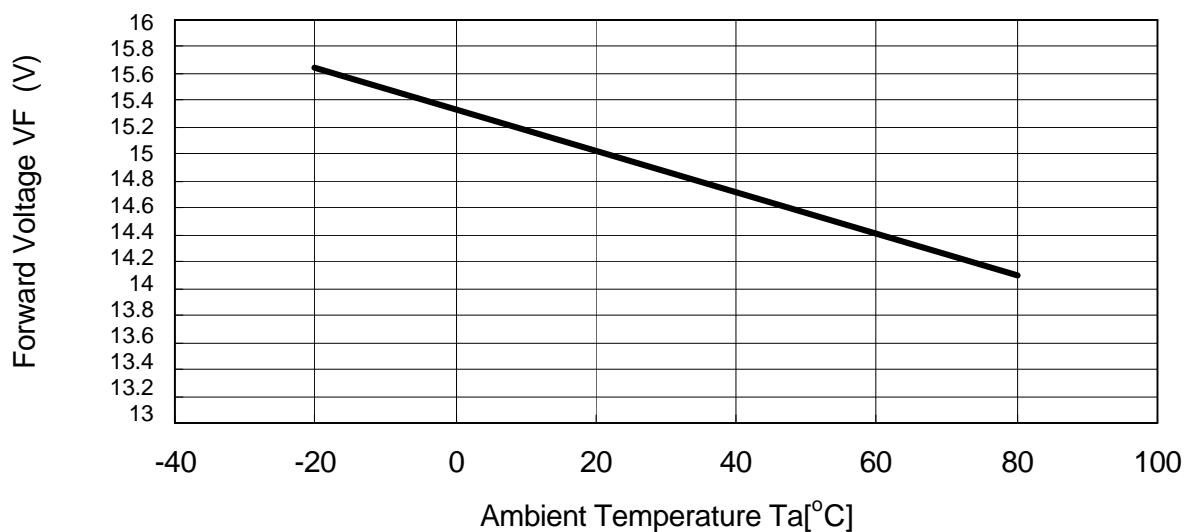

## 9. Spatial Radiation Pattern

- White

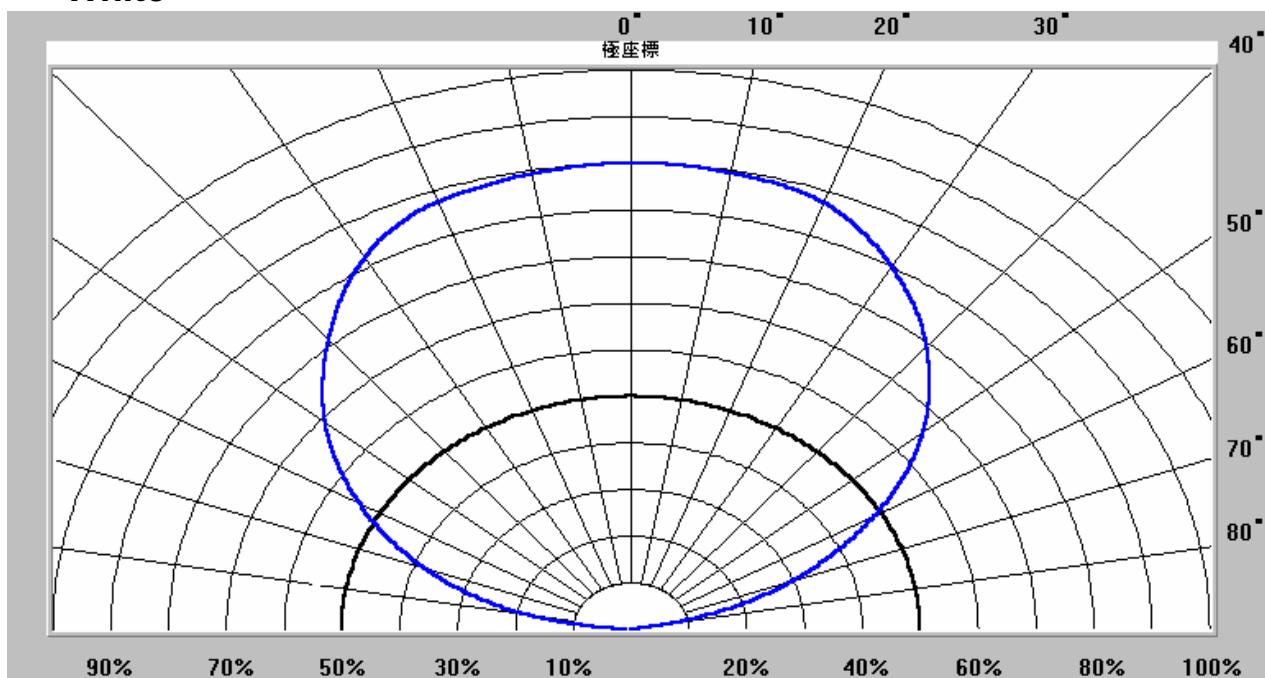

# PRODUCT SPECIFICATION

DATE: 03/08/2005

<b>COSMO</b> ELECTRONICS CORPORATION	H.P LED : <b>KLH00WXX4</b>	NO. 61L70024	REV. 1
SHEET 6 OF 6			

## 10. Reliability Test

Stress Test	Stress Conditions	Stress Duration	Failure Criteria	Failure rate
1.High temperature operation life	85 °C at 350mA	1,000 hrs	(1)Iv< 50% degradation (2)Vf max=110% initial	0/12
2.Room temperature operation life	25 °C at 350 mA	1,000 hrs		0/12
3. Low temperature operation life	-40 °C at 350 mA	1,000 hrs		0/12
4. Wet high temperature operation life	85 °C / 60% RH at 350 mA	1,000 hrs		0/12
5.Powered temperature cycle	(1.)-45°C/18min at 350 mA (2.)Transform /42min (3.)85 °C /18min at 350 mA	200 cycles		0/12
6.Temperature Cycle	(1.)-45 °C /30 min (2.)25 °C /5 min (3.)120 °C /30 min (4.)25 °C /5 min	200 cycles		0/12
7.High temperature storage	110 °C	1,000 hrs		0/12
8. Low temperature storage	-40 °C	1,000 hrs		0/12
9.High temperature humidity storage	60 °C / 90% RH	1,000 hrs		0/12
10.Thermal shock	(1.)-40 °C /20min (2.)Transform /20sec (3.)110 °C /20min	200 cycles		0/12