

## Modular Jacks

KLS12-140-8P8C RJ 45 Right-Angle Modular Jack , Shield Side Entry, Gold

### ELECTRICAL




- 1.Current Rating: 1.5 Amp
- 2.Voltage Rating: 125VAC
- 3.Contact Resistance: 30 MΩ Max.
- 4.Insulation Resistance: 500 MΩ Min. @500VDC
- 5.Withstanding Voltage: AC1000V 50Hz or 60Hz 1min.

### MECHANICAL



- 1.Durability :600 cycles Min.
- 2.PCB Retention pre-solder : 1 LB MIN

### ENVIRONMENTAL

- 1.Storage :-40°C~+80°C
- 2.Operation:-40°C~+70°C

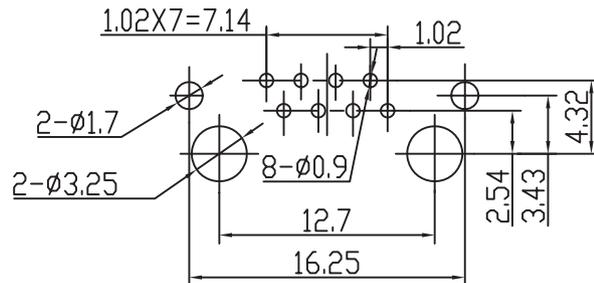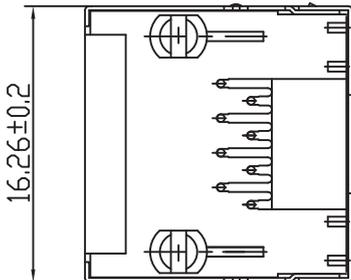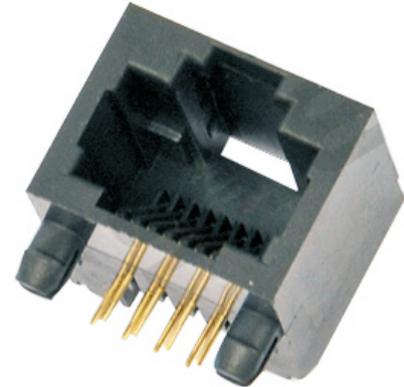

PC Board Layout

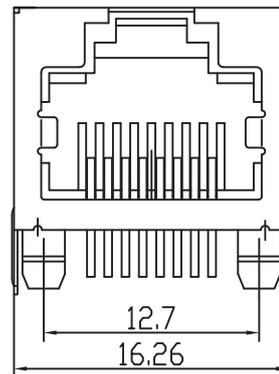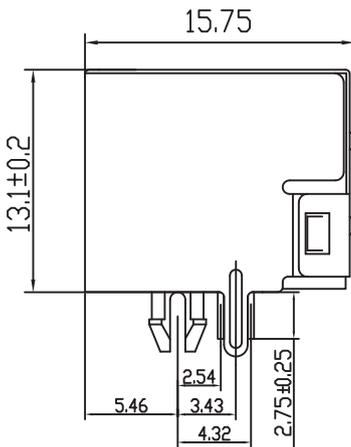

## ORDER INFORMATION

**KLS12-140-8P8C-W-01**

Pos.NO.  
Right-Angle Modular Jack  
W=With Shield

Gold Thickness
01-Fu"
02-3u"
03-6u"
04-15u"
05-30u"
06-50u"