

Document Title

1M x8 bit Super Low Power and Low Voltage Full CMOS Static RAM

Revision History

| <u>Revision No.</u> | <u>History</u> | <u>Draft Date</u> | <u>Remark</u> |
|---------------------|----------------|-------------------|---------------|
| 0.0 | Initial draft | August 25, 1999 | Preliminary |

www.DataSheet4U.com

The attached datasheets are provided by SAMSUNG Electronics. SAMSUNG Electronics CO., LTD. reserve the right to change the specifications and products. SAMSUNG Electronics will answer to your questions about device. If you have any questions, please contact the SAMSUNG branch offices.



KM68FS8100 Family

1M x 8 bit Super Low Power and Low Voltage Full CMOS Static RAM

FEATURES

- Process Technology: Full CMOS
- Organization: 1M x8
- Power Supply Voltage: 2.3~2.7V
- Low Data Retention Voltage: 1.5V(Min)
- Three state output and TTL Compatible
- Package Type: 48-FBGA-8.00x12.00

GENERAL DESCRIPTION


The KM68FS8100 families are fabricated by SAMSUNG's advanced full CMOS process technology. The families support industrial operating temperature ranges and have chip scale package for user flexibility of system design. The families also support low data retention voltage for battery back-up operation with low data retention current.

PRODUCT FAMILY

| Product Family | Operating Temperature | Vcc Range | Speed | Power Dissipation | | PKG Type |
|----------------|-----------------------|-----------|----------|-----------------------------------|------------------------------------|--------------------|
| | | | | Standby (I _{SB1} , Typ.) | Operating (I _{CC1} , Max) | |
| KM68FS8100I | Industrial(-40~85°C) | 2.3~2.7V | 70*/85ns | 0.5μA | 3mA | 48-FBGA-8.00x12.00 |


1. The parameter is measured with 30pF test load.

PIN DESCRIPTION

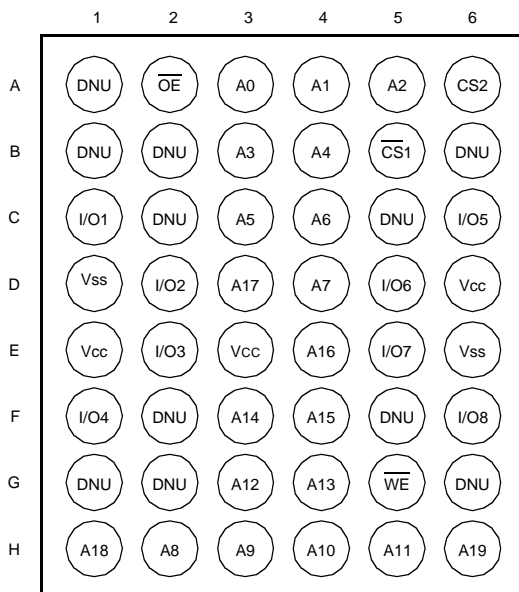

48-FBGA: Top View (Ball Down)

FUNCTIONAL BLOCK DIAGRAM

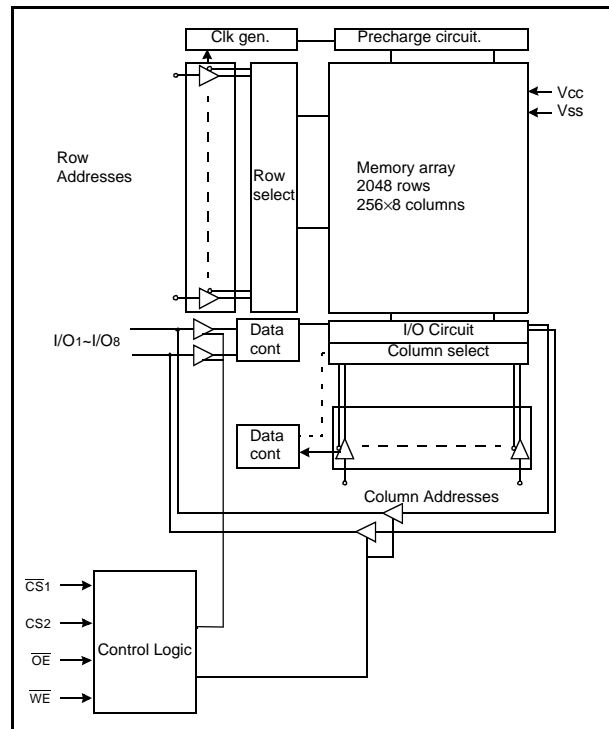

| Name | Function | Name | Function |
|-------------------------------------|---------------------|---------------------------------|----------------|
| $\overline{CS1}$, $CS2$ | Chip Select Inputs | A ₀ ~A ₁₉ | Address Inputs |
| \overline{OE} | Output Enable Input | Vcc | Power |
| \overline{WE} | Write Enable Input | Vss | Ground |
| I/O ₁ ~I/O ₁₆ | Data Inputs/Outputs | DNU | Do Not Use |

SAMSUNG ELECTRONICS CO., LTD. reserves the right to change products and specifications without notice.

PRODUCT LIST

| Industrial Temperature Products(-40~85°C) | |
|---|---------------------|
| Part Name | Function |
| KM68FS8100FI-7 | 48-FBGA, 70ns, 2.5V |
| KM68FS8100FI-8 | 48-FBGA, 85ns, 2.5V |

FUNCTIONAL DESCRIPTION

| \overline{CS}_1 | CS_2 | \overline{OE} | \overline{WE} | I/O ₁₋₈ | Mode | Power |
|-------------------|-----------------|-----------------|-----------------|--------------------|-----------------|---------|
| H | X ¹⁾ | X ¹⁾ | X ¹⁾ | High-Z | Deselected | Standby |
| X ¹⁾ | L | X ¹⁾ | X ¹⁾ | High-Z | Deselected | Standby |
| L | H | H | H | High-Z | Output Disabled | Active |
| L | H | L | H | Dout | Read | Active |
| L | H | X ¹⁾ | L | Din | Write | Active |

1. X means don't care. (Must be low or high state)

ABSOLUTE MAXIMUM RATINGS¹⁾

| Item | Symbol | Ratings | Unit |
|---|------------------------------------|-------------|------|
| Voltage on any pin relative to V _{ss} | V _{IN} , V _{OUT} | -0.2 to 3.0 | V |
| Voltage on V _{cc} supply relative to V _{ss} | V _{cc} | -0.2 to 3.6 | V |
| Power Dissipation | P _D | 1.0 | W |
| Storage temperature | T _{STG} | -55 to 150 | °C |
| Operating Temperature | T _A | -40 to 85 | °C |

1. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Functional operation should be restricted to recommended operating condition. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS¹⁾

| Item | Symbol | Min | Typ | Max | Unit |
|--------------------|-----------------|--------------------|-----|------------------------------------|------|
| Supply voltage | V _{CC} | 2.3 | 2.5 | 2.7 | V |
| Ground | V _{SS} | 0 | 0 | 0 | V |
| Input high voltage | V _{IH} | 2.2 | - | V _{CC} +0.2 ²⁾ | V |
| Input low voltage | V _{IL} | -0.2 ³⁾ | - | 0.4 | V |

Note:

1. T_A=-40 to 85°C, otherwise specified
2. Overshoot: V_{CC}+1.0V in case of pulse width ≤20ns.
3. Undershoot: -1.0V in case of pulse width ≤20ns.
4. Overshoot and undershoot are sampled, not 100% tested.

www.DataSheet4U CAPACITANCE¹⁾ (f=1MHz, T_A=25°C)

| Item | Symbol | Test Condition | Min | Max | Unit |
|--------------------------|-----------------|---------------------|-----|-----|------|
| Input capacitance | C _{IN} | V _{IN} =0V | - | 8 | pF |
| Input/Output capacitance | C _{IO} | V _{IO} =0V | - | 10 | pF |

1. Capacitance is sampled, not 100% tested

DC AND OPERATING CHARACTERISTICS


| Item | Symbol | Test Conditions | Min | Typ | Max | Unit |
|--------------------------------|------------------|--|-----|-----|------------------|------|
| Input leakage current | I _{LI} | V _{IN} =V _{SS} to V _{CC} | -1 | - | 1 | μA |
| Output leakage current | I _{LO} | $\overline{CS}_1=V_{IH}, \overline{CS}_2=V_{IL}$ or $\overline{OE}=V_{IH}$ or $\overline{WE}=V_{IL}, V_{IO}=V_{SS}$ to V _{CC} | -1 | - | 1 | μA |
| Operating power supply current | I _{CC} | I _{IO} =0mA, $\overline{CS}_1=V_{IL}, \overline{CS}_2=V_{IH}, \overline{WE}=V_{IH}, V_{IN}=V_{IH}$ or V _{IL} | - | - | 2 | mA |
| Average operating current | I _{CC1} | Cycle time=1μs, 100%duty, I _{IO} =0mA, $\overline{CS}_1 \leq 0.2V,$ $\overline{CS}_2 \geq V_{CC}-0.2V, V_{IN} \leq 0.2V$ or $V_{IN} \geq V_{CC}-0.2V$ | - | - | 2 | mA |
| | I _{CC2} | Cycle time=Min, I _{IO} =0mA, 100% duty, $\overline{CS}_1=V_{IL}, \overline{CS}_2=V_{IH}, V_{IN}=V_{IL}$ or V _{IH} | - | - | 25 | mA |
| Output low voltage | V _{OL} | I _{OL} = 2.1mA | | | 0.4 | V |
| Output high voltage | V _{OH} | I _{OH} = -1.0mA | 2.2 | | | V |
| Standby Current(TTL) | I _{SB} | $\overline{CS}_1=V_{IH}, \overline{CS}_2=V_{IL},$ Other inputs=V _{IH} or V _{IL} | - | - | 0.3 | mA |
| Standby Current(CMOS) | I _{SB1} | $\overline{CS}_1 \geq V_{CC}-0.2V, \overline{CS}_2 \geq V_{CC}-0.2V$ (\overline{CS}_1 controlled) or $\overline{CS}_2 \leq 0.2V$ (\overline{CS}_2 controlled), Other inputs=0~V _{CC} | - | 0.5 | 20 ¹⁾ | μA |

1. Super low power product=10μA with special handling.

AC OPERATING CONDITIONS

TEST CONDITIONS (Test Load and Input/Output Reference)

Input pulse level: 0.2 to 2.2V
 Input rising and falling time: 5ns
 Input and output reference voltage: 1.1V
 Output load (see right): $C_L = 100\text{pF} + 1\text{TTL}$
 $C_L = 30\text{pF} + 1\text{TTL}$

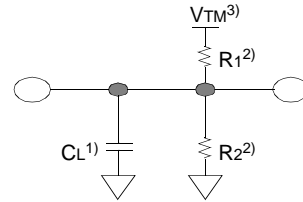

1. Including scope and jig capacitance
2. $R_1 = 3070\Omega$, $R_2 = 3150\Omega$
3. $V_{TM} = 2.3\text{V}$

AC CHARACTERISTICS ($V_{CC} = 2.3 \sim 2.7\text{V}$, $T_A = -40$ to 85°C)

| Parameter List | Symbol | Speed Bins | | | | Units | |
|---------------------------------|---|------------|-----|------|-----|-------|----|
| | | 70ns | | 85ns | | | |
| | | Min | Max | Min | Max | | |
| Read | Read cycle time | tRC | 70 | - | 85 | - | ns |
| | Address access time | tAA | - | 70 | - | 85 | ns |
| | Chip select to output | tCO1, tCO2 | - | 70 | - | 85 | ns |
| | Output enable to valid output | tOE | - | 35 | - | 40 | ns |
| | Chip select to low-Z output | tLZ1, tLZ2 | 10 | - | 10 | - | ns |
| | Output enable to low-Z output | tOLZ | 5 | - | 5 | - | ns |
| | Chip disable to high-Z output | tHZ1, tHZ2 | 0 | 25 | 0 | 25 | ns |
| | $\overline{\text{OE}}$ disable to high-Z output | tOHZ | 0 | 25 | 0 | 25 | ns |
| Output hold from address change | tOH | 10 | - | 10 | - | ns | |
| Write | Write cycle time | tWC | 70 | - | 85 | - | ns |
| | Chip select to end of write | tcw1, tcw2 | 60 | - | 70 | - | ns |
| | Address set-up time | tAS | 0 | - | 0 | - | ns |
| | Address valid to end of write | tAW | 60 | - | 70 | - | ns |
| | Write pulse width | tWP | 50 | - | 60 | - | ns |
| | Write recovery time | tWR | 0 | - | 0 | - | ns |
| | Write to output high-Z | tWHZ | 0 | 25 | 0 | 25 | ns |
| | Data to write time overlap | tdW | 25 | - | 35 | - | ns |
| | Data hold from write time | tdH | 0 | - | 0 | - | ns |
| End write to output low-Z | tOW | 5 | - | 5 | - | ns | |


DATA RETENTION CHARACTERISTICS

| Item | Symbol | Test Condition | Min | Typ | Max | Unit |
|----------------------------|--------|---|-----|-----|------------------|---------------|
| Vcc for data retention | VDR | $\overline{\text{CS}}_1 \geq V_{CC} - 0.2\text{V}^{(1)}$ | 1.5 | - | 2.7 | V |
| Data retention current | IDR | $V_{CC} = 1.5\text{V}$, $\overline{\text{CS}}_1 \geq V_{CC} - 0.2\text{V}^{(1)}$ | - | 0.5 | 6 ⁽²⁾ | μA |
| Data retention set-up time | tSDR | See data retention waveform | 0 | - | - | ms |
| Recovery time | trDR | | tRC | - | - | |


1. $\overline{\text{CS}}_1 \geq V_{CC} - 0.2\text{V}$, $\overline{\text{CS}}_2 \geq V_{CC} - 0.2\text{V}$ ($\overline{\text{CS}}_1$ controlled) or $\overline{\text{CS}}_2 \geq V_{CC} - 0.2\text{V}$ ($\overline{\text{CS}}_2$ controlled).
2. Super low power product = $4\mu\text{A}$ with special handling.

TIMMING DIAGRAMS

TIMING WAVEFORM OF READ CYCLE(1) (Address Controlled, $\overline{CS1}=\overline{OE}=V_{IL}$, $CS2=\overline{WE}=V_{IH}$)

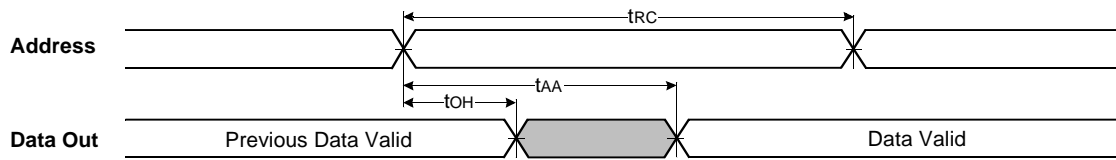


TIMING WAVEFORM OF READ CYCLE(2) ($\overline{WE}=V_{IH}$)

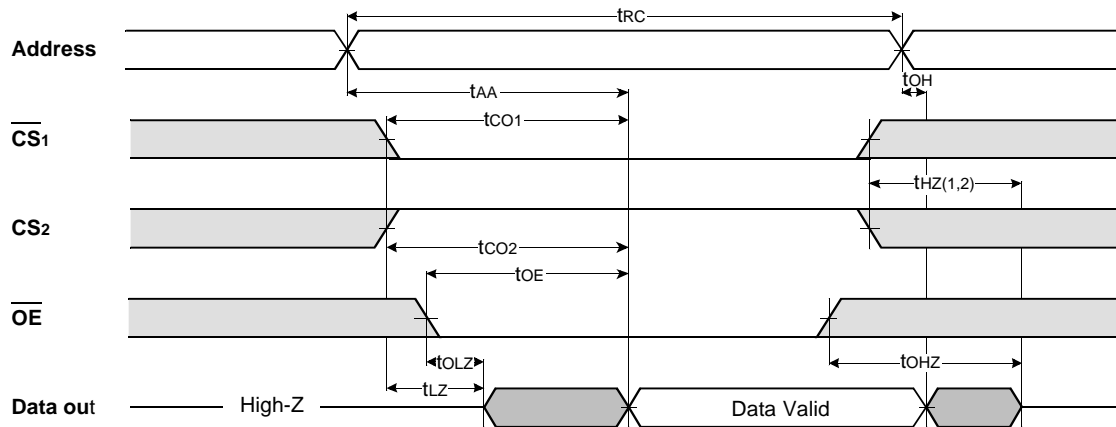


NOTES (READ CYCLE)

1. t_{HZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels.
2. At any given temperature and voltage condition, $t_{HZ}(\text{Max.})$ is less than $t_{LZ}(\text{Min.})$ both for a given device and from device to device interconnection.

TIMING WAVEFORM OF WRITE CYCLE(1) (\overline{WE} Controlled)

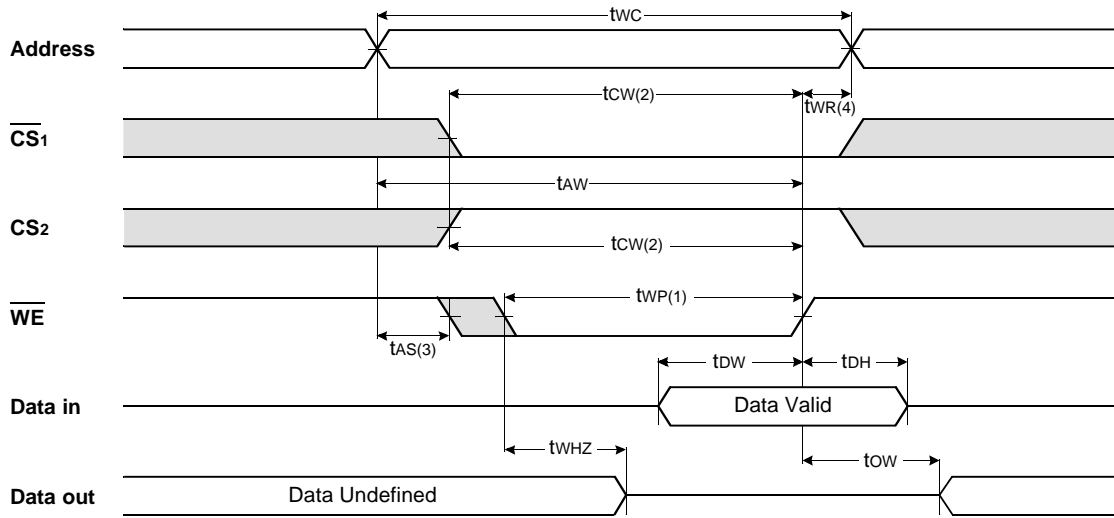

TIMING WAVEFORM OF WRITE CYCLE(2) ($\overline{CS1}$ Controlled)

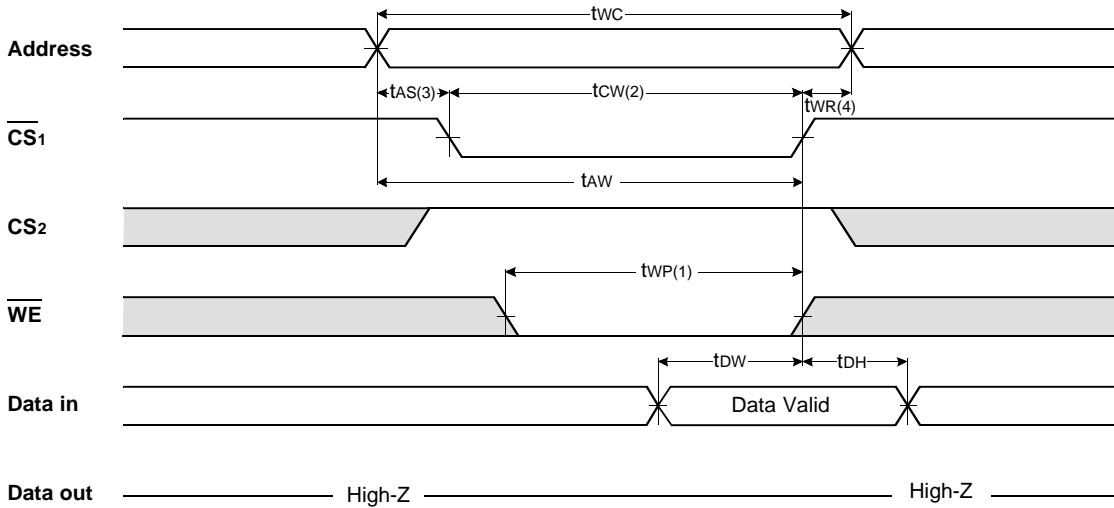

TIMING WAVEFORM OF WRITE CYCLE(3) (CS₂ Controlled)




NOTES (WRITE CYCLE)


1. A write occurs during the overlap of a low \overline{CS}_1 , a high CS_2 and a low \overline{WE} . A write begins at the latest transition among \overline{CS}_1 goes low, CS_2 going high and \overline{WE} going low : A write ends at the earliest transition among CS_1 going high, CS_2 going low and \overline{WE} going high, t_{WP} is measured from the beginning of write to the end of write.
2. t_{CW} is measured from the \overline{CS}_1 going low or CS_2 going high to the end of write.
3. t_{AS} is measured from the address valid to the beginning of write.
4. t_{WR} is measured from the end of write to the address change. t_{WR1} applied in case a write ends as \overline{CS}_1 or \overline{WE} going high t_{WR2} applied in case a write ends as CS_2 going to low.

DATA RETENTION WAVE FORM

\overline{CS}_1 controlled

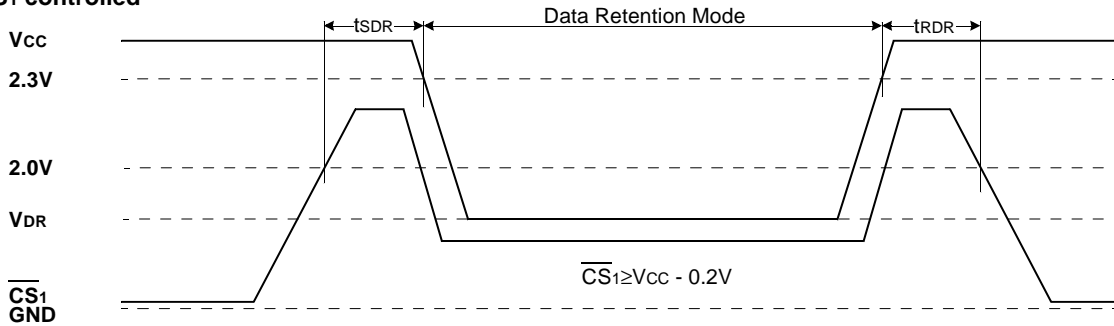

CS_2 controlled

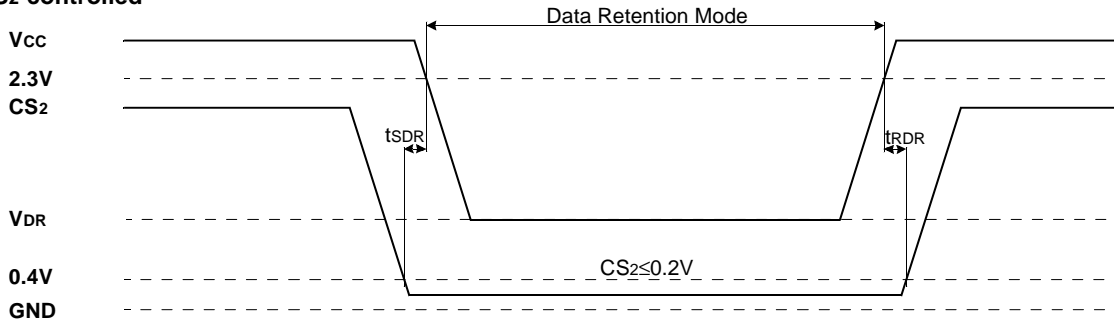


PACKAGE DIMENSION


Unit: millimeters

48 BALL FINE PITCH BGA(0.75mm ball pitch)


Top View

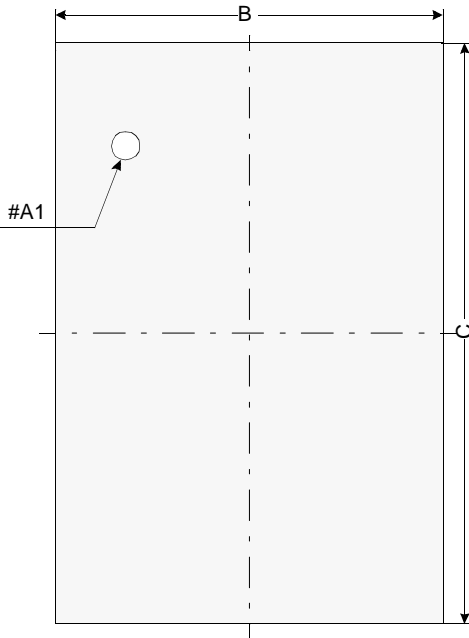


Bottom View

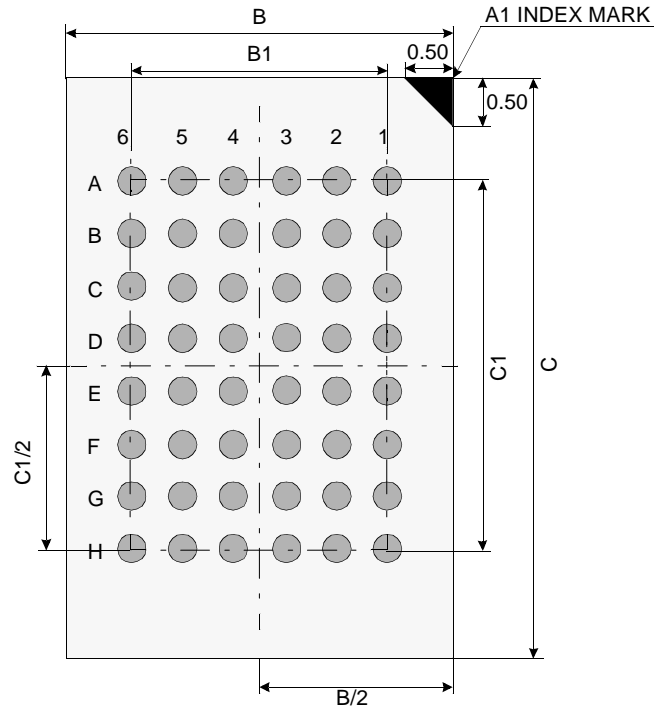

Side View

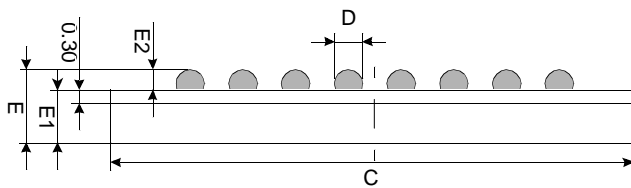

Detail A

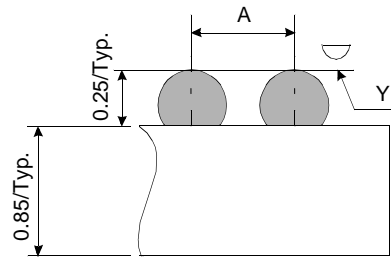

| | Min | Typ | Max |
|----|-------|-------|-------|
| A | - | 0.75 | - |
| B | 7.90 | 8.00 | 8.10 |
| B1 | - | 3.75 | - |
| C | 11.90 | 12.00 | 12.10 |
| C1 | - | 5.25 | - |
| D | 0.30 | 0.35 | 0.40 |
| E | - | 1.10 | 1.20 |
| E1 | - | 0.85 | - |
| E2 | 0.20 | 0.25 | 0.30 |
| Y | - | - | 0.08 |

Notes.

1. Bump counts: 48(8row x 6column)
2. Bump pitch : (x,y)=(0.75 x 0.75)(typ.)
3. All tolerance are +/-0.050 unless otherwise specified.
4. Typ : Typical
5. Y is coplanarity: 0.08(Max)