

GENERAL DESCRIPTION

This Trench MOSFET has better characteristics, such as fast switching time, low on resistance, low gate charge and excellent avalanche characteristics. It is mainly suitable for portable for portable equipment and SMPS.

FEATURES




- $V_{DSS} = -30V$, $I_D = -10A$.
- Drain-Source ON Resistance.
 $R_{DS(ON)} = 20m \Omega$ (Max.) @ $V_{GS} = -10V$
 $R_{DS(ON)} = 28m \Omega$ (Max.) @ $V_{GS} = -4.5V$
- Super High Dense Cell Design

MOSFET Maximum Ratings (Ta=25 °C Unless otherwise noted)


CHARACTERISTIC		SYMBOL	PATING	UNIT
Drain Source Voltage		V_{DSS}	-30	V
Gate Source Voltage		V_{GSS}	± 25	V
Drain Current	DC	I_D^*	-10	A
	Pulsed	I_{DP}	-50	A
Drain Source Diode Forward Current		I_S	-1.7	A
Drain Power Dissipation		P_D^*	2.0	W
Maximum Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55~150	°C
Thermal Resistance, Junction to Ambient		R_{thJA}^*	62.5	°C/W

Note : *Surface Mounted on FR4 Board

PIN CONNECTION (TOP VIEW)

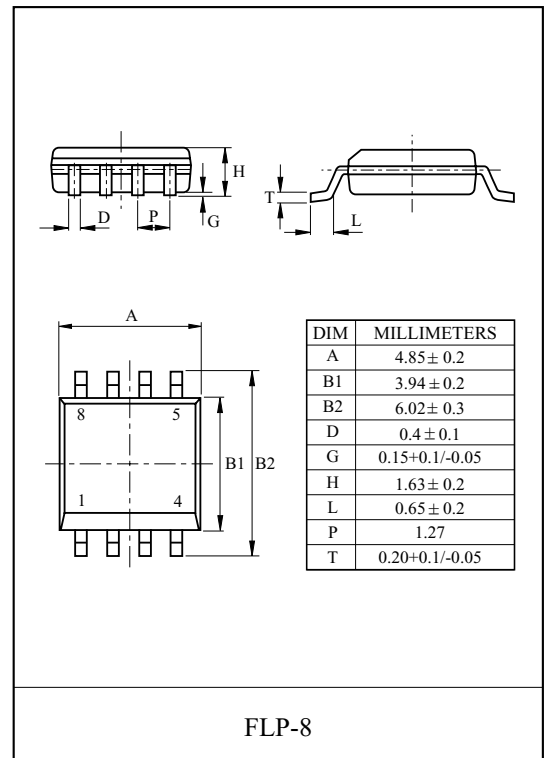

Marking



KMB010P30QA

ELECTRICAL CHARACTERISTICS (Ta=25°C) UNLESS OTHERWISE NOTED

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_{DS}=-250\mu A$	-30	-	-	V
Drain Cut-off Current	I_{DSS}	$V_{DS}=-24V, V_{GS}=0V$	-	-	-1	μA
Gate Leakage Current	I_{GSS}	$V_{GS}=\pm 25V, V_{DS}=0V$	-	-	± 100	nA
Gate Threshold Voltage	V_{th}	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1.3	-1.9	-2.5	V
Drain-Source ON Resistance	$R_{DS(ON)*}$	$V_{GS}=-10V, I_D=-10A$	-	12	20	m Ω
		$V_{GS}=-4.5V, I_D=-8A$	-	20	28	
On-State Drain Current	$I_{D(ON)*}$	$V_{DS}=-5V, V_{GS}=-10V$	-30	-	-	A
Forward Transconductance	G_{fs*}	$V_{DS}=-15V, I_D=-10A$	-	14	-	S
Dynamic						
Input Capacitance	C_{iss}	$V_{DS}=-15V, V_{GS}=0V, f=1MHz$	-	2530	-	pF
Output Capacitance	C_{oss}		-	635	-	
Reverse Transfer Capacitance	C_{rss}		-	445	-	
Total Gate Charge	Q_g^*	$V_{DS}=-15V, V_{GS}=-10V, I_D=-10A$	-	44.6	-	nC
Gate-Source Charge	Q_{gs}^*		-	7.7	-	
Gate-Drain Charge	Q_{gd}^*		-	11.5	-	
Turn-On Delay Time	$t_{d(on)*}$	$V_{DD}=-15V, V_{GS}=-10V$ $R_L=1.25\Omega, R_G=6\Omega$	-	10.2	-	ns
Turn-On Rise Time	t_r^*		-	6.3	-	
Turn-On Delay Time	$t_{d(off)*}$		-	22.5	-	
Turn-On Fall Time	t_f^*		-	10.6	-	
Source-Drain Diode Ratings						
Source-Drain Forward Voltage	V_{SDF*}	$V_{GS}=0V, I_{DR}=-1.7A,$	-	-0.73	-1.2	V
Note						
1. Pulse Test : Pulse width $\leq 10\mu s$, Duty cycle $\leq 1\%$						

KMB010P30QA

Fig1. $I_D - V_{DS}$

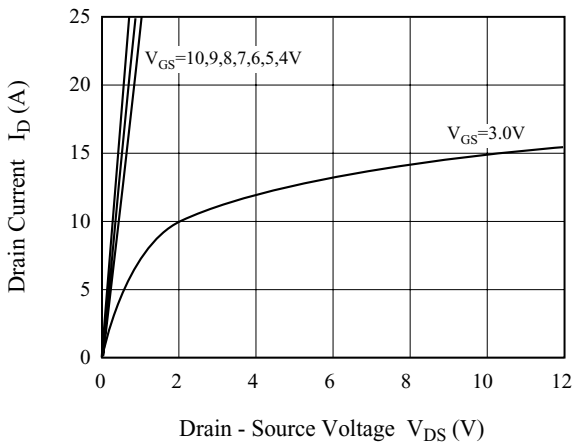


Fig2. $I_D - V_{GS}$

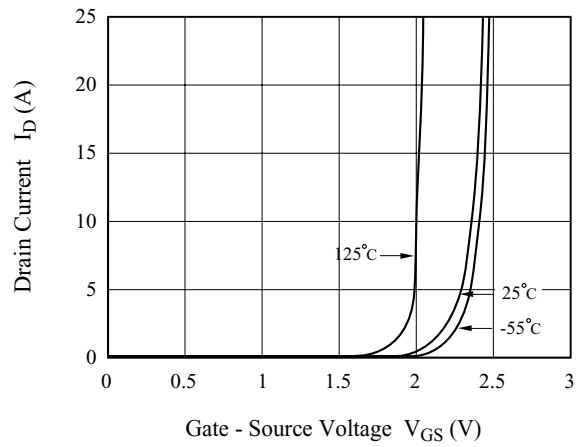


Fig3. C - V_{DS}

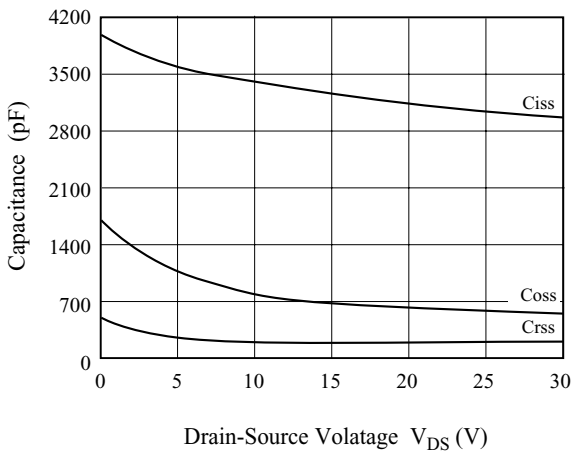


Fig4. $R_{DS(ON)} - T_j$

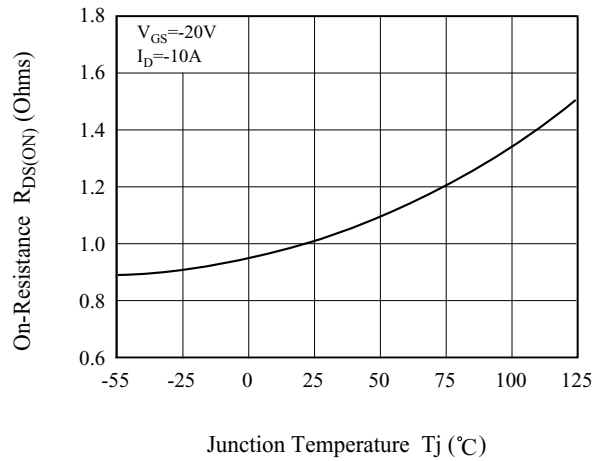


Fig5. $V_{th} - T_j$


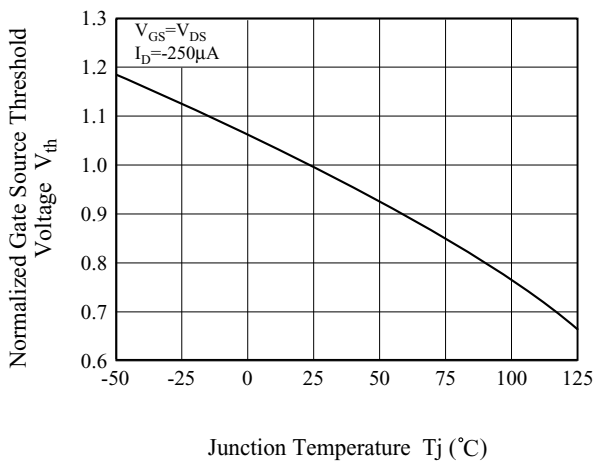


Fig 6. $I_{DR} - V_{SDF}$

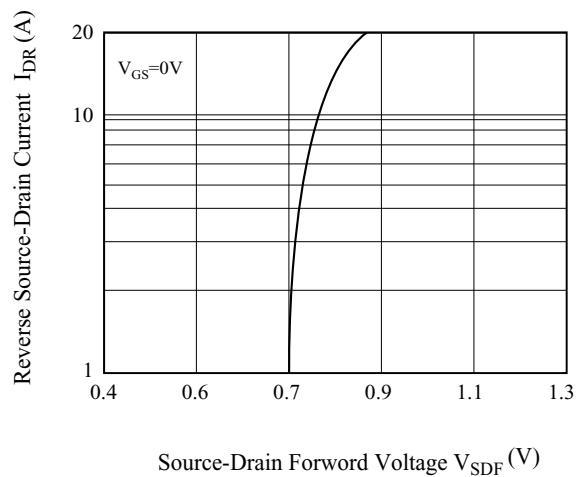

KMB010P30QA

Fig7. $V_{GS} - Q_g$

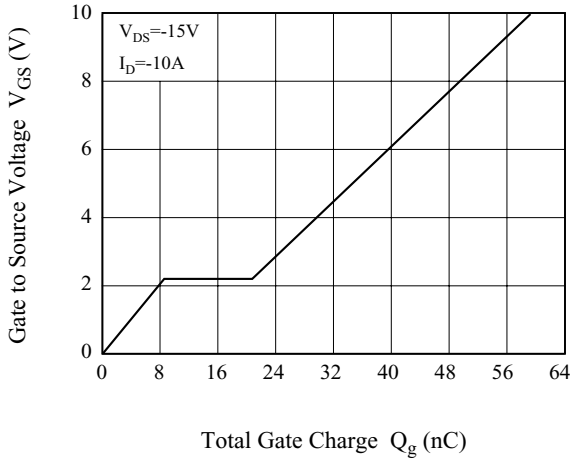


Fig8. Safe Operation Area

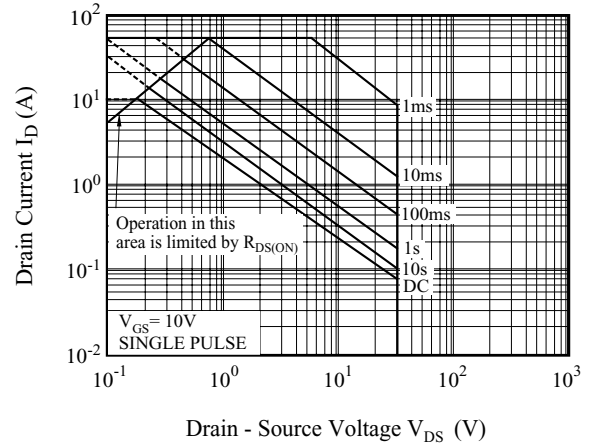


Fig9. Transient Thermal Response Curve

