


GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION.

· Complementary to KN4402/4403.

MAXIMUM RATING (Ta=25°C)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|-----------------------------|-----------|-----------|------|
| Collector-Base Voltage | V_{CBO} | 60 | V |
| Collector-Emitter Voltage | V_{CEO} | 40 | V |
| Emitter-Base Voltage | V_{EBO} | 6 | V |
| Collector Current | I_C | 600 | mA |
| Collector Power Dissipation | P_C | 625 | mW |
| Junction Temperature | T_j | 150 | °C |
| Storage Temperature Range | T_{stg} | -55 ~ 150 | °C |

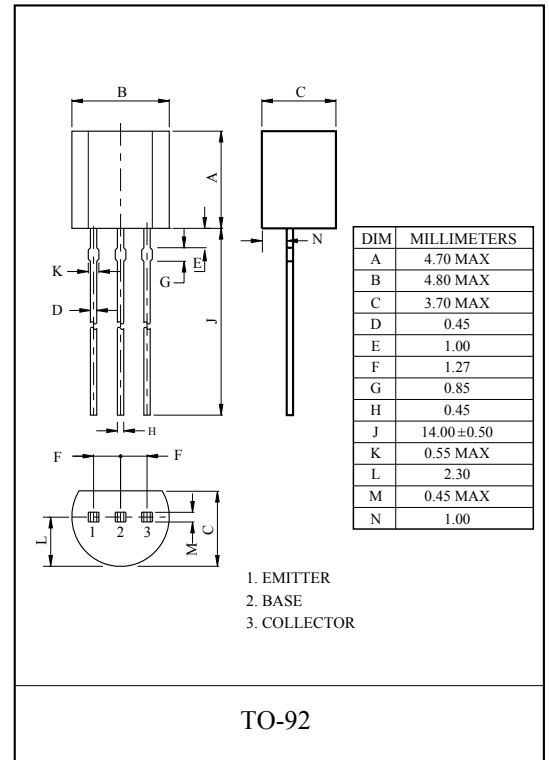

KN4400/4401


ELECTRICAL CHARACTERISTICS (Ta=25°C)

| CHARACTERISTIC | | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|-------------|----------------|----------------------------------|------|------|------|------|
| Collector Cut-off Current | | I_{CEX} | $V_{CE}=35V, V_{EB(OFF)}=0.4V$ | - | - | 100 | nA |
| Collector Cut-off Current | | I_{CBO} | $V_{CB}=60V, I_E=0$ | - | - | 100 | nA |
| Emitter Cut-off Current | | I_{EBO} | $V_{EB}=6V, I_C=0$ | - | - | 100 | nA |
| Collector-Base Breakdown Voltage | | $V_{(BR)CBO}$ | $I_C=100\mu A, I_E=0$ | 60 | - | - | V |
| Collector-Emitter Breakdown Voltage * | | $V_{(BR)CEO}$ | $I_E=1mA, I_B=0$ | 40 | - | - | V |
| Emitter-Base Breakdown Voltage | | $V_{(BR)EBO}$ | $I_E=100\mu A, I_C=0$ | 6 | - | - | V |
| DC Current Gain * | KN4401 | $h_{FE}(1)$ | $V_{CE}=1V, I_C=0.1mA$ | 20 | - | - | |
| | KN4400 | $h_{FE}(1)$ | $V_{CE}=1V, I_C=1mA$ | 20 | - | - | |
| | KN4401 | $h_{FE}(2)$ | | 40 | - | - | |
| | KN4400 | $h_{FE}(2)$ | $V_{CE}=1V, I_C=10mA$ | 40 | - | - | |
| | KN4401 | $h_{FE}(3)$ | | 80 | - | - | |
| | KN4400 | $h_{FE}(3)$ | $V_{CE}=1V, I_C=150mA$ | 50 | - | 150 | |
| | KN4401 | $h_{FE}(4)$ | | 100 | - | 300 | |
| | KN4400 | $h_{FE}(4)$ | $V_{CE}=2V, I_C=500mA$ | 20 | - | - | |
| KN4401 | $h_{FE}(5)$ | 40 | | - | - | | |
| Collector-Emitter Saturation Voltage * | | $V_{CE(sat)1}$ | $I_C=150mA, V_{CE}=15mA$ | - | - | 0.4 | V |
| | | $V_{CE(sat)2}$ | $I_C=500mA, I_B=50mA$ | - | - | 0.75 | |
| Base-Emitter Saturation Voltage * | | $V_{BE(sat)1}$ | $I_C=150mA, I_B=15mA$ | 0.75 | - | 0.95 | V |
| | | $V_{BE(sat)2}$ | $I_C=500mA, I_B=50mA$ | - | - | 1.2 | |
| Transition Frequency | KN4400 | f_T | $I_C=20mA, V_{CE}=10V, f=100MHz$ | 200 | - | - | MHz |
| | KN4401 | | | 250 | - | - | |
| Collector Output Capacitance | | C_{ob} | $V_{CB}=5V, I_E=0, f=1.0MHz$ | - | - | 6.5 | pF |


* Pulse Test : Pulse Width $\leq 300\mu S$, Duty Cycle $\leq 2\%$.

KN4400/4401


$h_{FE} - I_C$

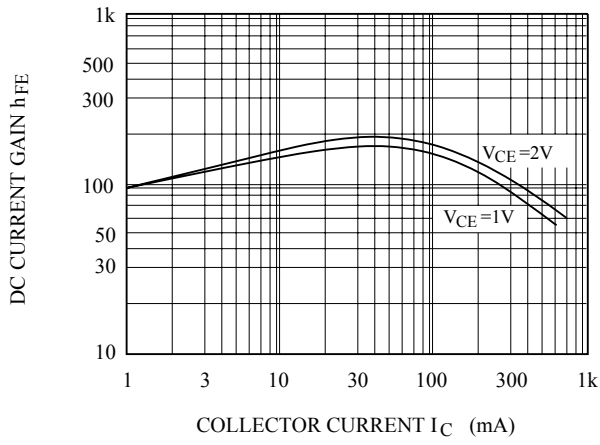

$C_{cb}, C_{ob} - V_{CB}$

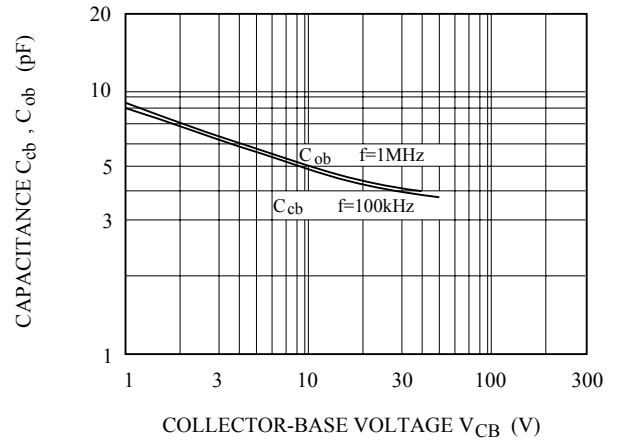

$V_{BE(sat)}, V_{CE(sat)} - I_C$

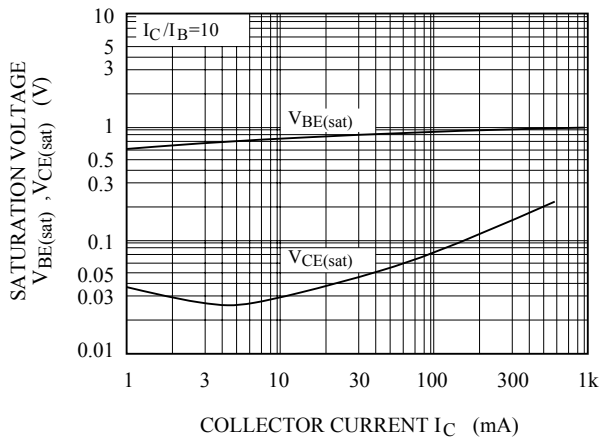

$P_C - T_a$

