


High Reliability Photo Coupler

Features

- Current transfer ratio
(CTR: MIN.60% at $I_F = \pm 1\text{mA}$, $V_{ce} = 5\text{V}$)
- High isolation voltage between input and output
(Viso: 5000Vrms)
- Compact dual-in-line package
- Ac input
- Available package: DIP / SMD / H



QRCTA16P



Applications

- Programmable Controller Applications for Low Input Photocouplers and High Vceo Photocouplers.
- Telephone sets, telephone exchangers
- System appliances, Limit Switches, Sensors, Thermostats and Transducers etc.
- Signal transmission between circuits of different potentials and impedances

Absolute Maximum Ratings (T_a=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	IF	±50	mA
	Peak forward current	IFM	±1	A
	Power dissipation	P_D	70	mW
Output	Collector-emitter voltage	V_{CEO}	60	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector-base voltage	V_{CBO}	60	V
	Emitter-base voltage	V_{EBO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
Total power dissipation		P_{tot}	200	mW
Isolation voltage 1 minute		V_{iso}	5000	V _{rms}
Operating Temperature		T_{opr}	-30 ~ +100	°C
Storage Temperature		T_{stg}	-55 ~ +125	°C
Soldering temperature 10 second		T_{sol}	260	°C

Electro-Optical Characteristics (T_a=25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Input	Forward Voltage	VF	----	1.2	1.4	V	IF = ±20mA
	Peak forward voltage	VFM	----	----	3.5	V	IFM = ±0.5A
	Terminal capacitance	C_t	----	30	----	pF	V = 0, f = 1kHz
Output	Collector dark current	I_{CEO}	----	----	0.1	µA	VCE = 20V, IF = 0
Transfer Characteristics	Current transfer ratio	CTR	60	----	600	%	IF = ±1mA, VCE = 5V
	Collector-emitter saturation voltage	V_{CE(sat)}	----	0.1	0.3	V	IF = ±20mA, I _C = 1mA
	Isolation resistance	R_{iso}	5x10 ¹⁰	10 ¹¹	----	ohm	DC500V
	Floating capacitance	C_f	----	0.6	1.0	pF	V = 0, f = 1kHz
	Cut-off frequency	f_c	----	80	----	kHz	V _{CC} = 5V, I _C = 2mA, R _L = 100ohm
	Response time (Rise)	t_r	----	5	20	µs	V _{CE} = 2V, I _C = 2mA, R _L = 100ohm
Response time (Fall)	t_f	----	4	20	µs		

Typical Electro-Optical Characteristics Curves

Fig.1 Current Transfer Ratio vs. Forward Current

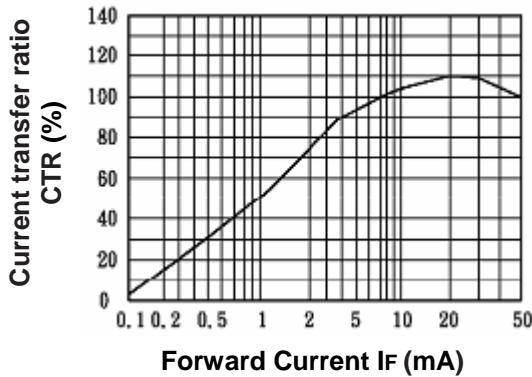


Fig.2 Collector Power Dissipation vs. Ambient Temperature

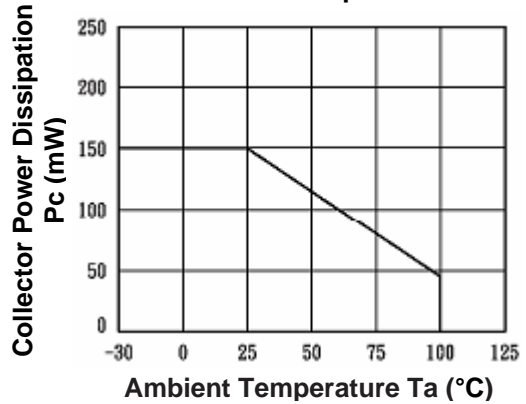


Fig.3 Collector Dark Current vs. Ambient Temperature

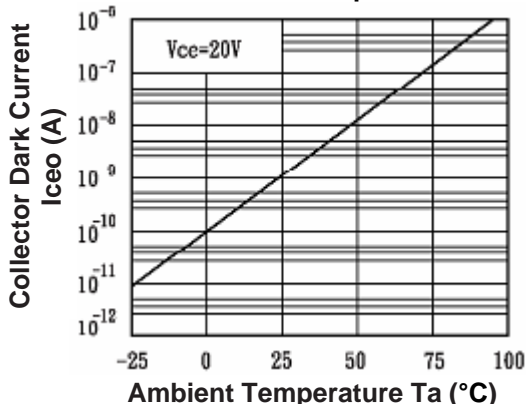


Fig.4 Forward Current vs. Ambient Temperature

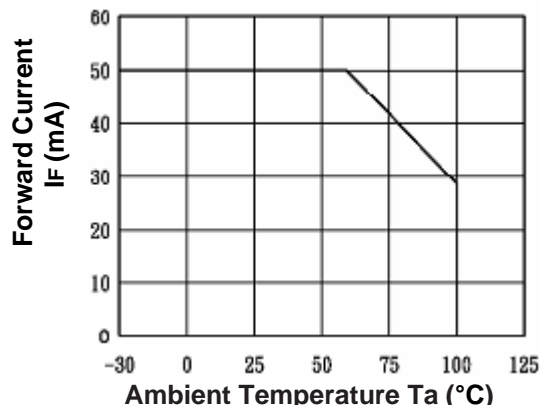


Fig.5 Forward Current vs. Forward Voltage

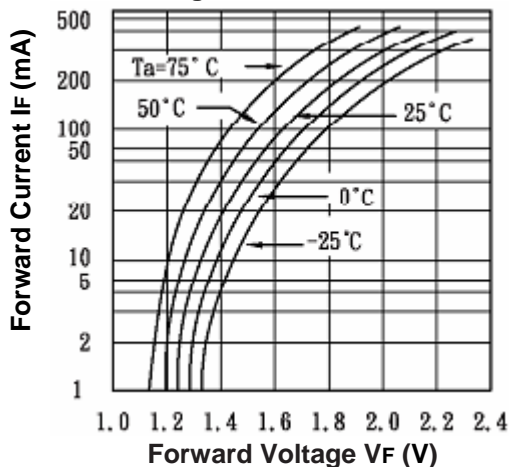


Fig.6 Collector Current vs. Collector Emitter Voltage

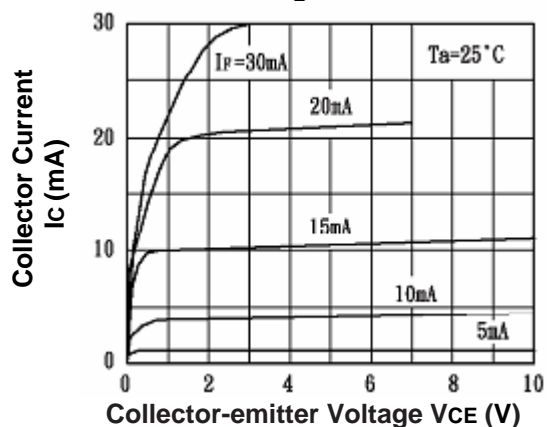


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

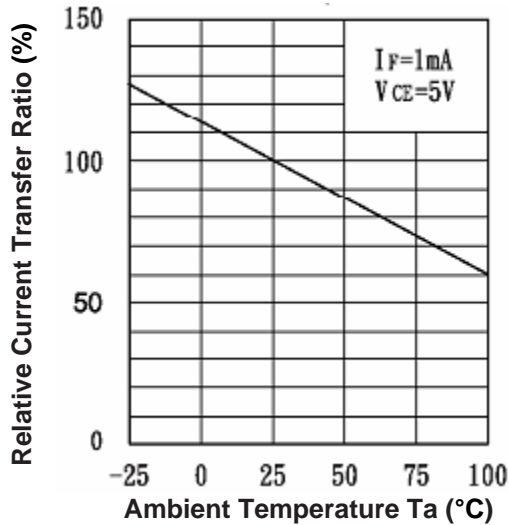


Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature

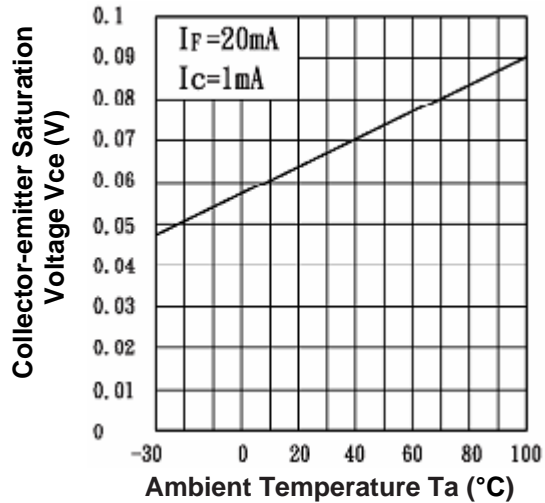


Fig.9 Collector-emitter Saturation Voltage vs. Forward Current

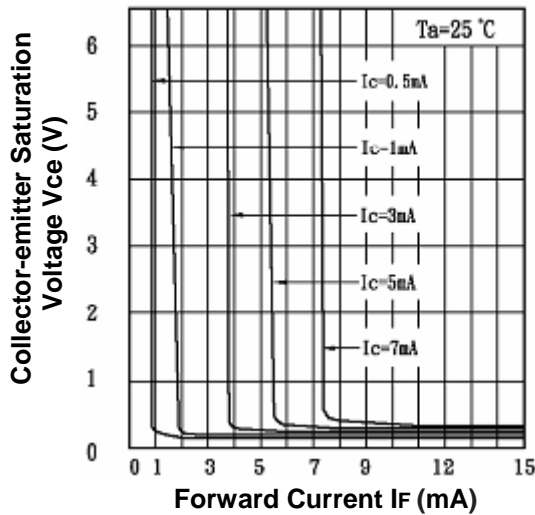


Fig.10 Response Time vs. Load Resistance


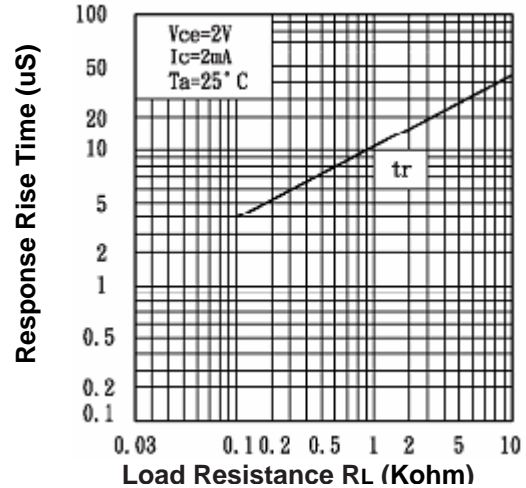



Fig.11 Response Time vs. Load Resistance

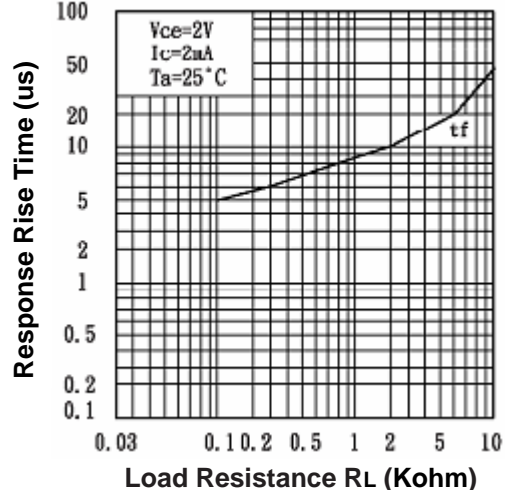

Classification table of current transfer ratio is shown below.


Model No.	Rank mark	CTR (%)
KP6010	A	60 to 600
KP6010	B	60 to 300

Package Dimensions (In mm)

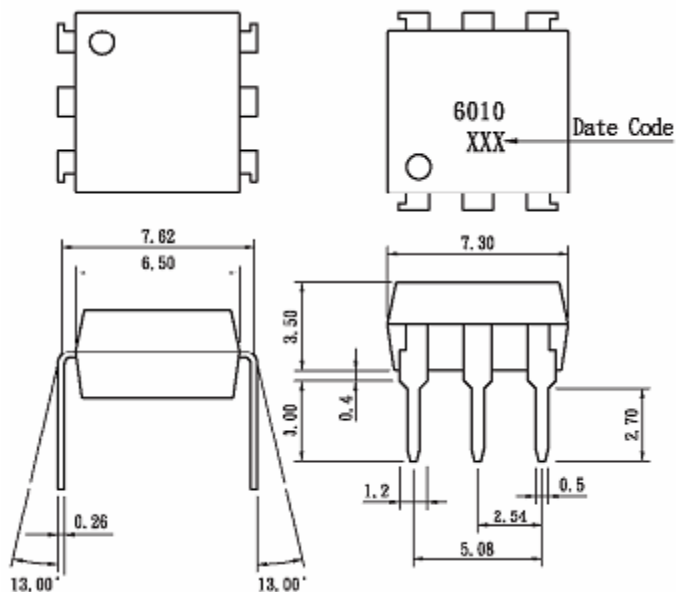

Note: 1. Dimensions are in millimeters
 2. Tolerances unless dimensions $\pm 0.2\text{mm}$

Schematic: Top View

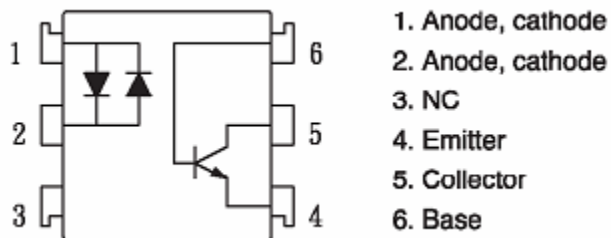

How to contact us

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 247-2232 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO

C.P. 42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001

BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

CROSS REGION PLAZA, 899 LINGLING ROAD, SUITE 18C, SHANGHAI, 200030, CHINA

Tel: +86-21-54249942

Fax: +86-21-5424-9931