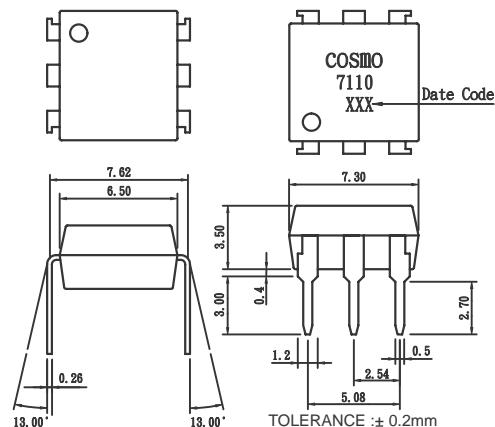



**Features**

1. High sensitivity.
2. TTL and LSTTL compatible output.
3. Operating supply voltage range.  
(Vcc 4.5V to 17V)
4. Output form pull-up resistor built-in type.
5. Low output current dissipation.  
(IccL : MAX. 3.8mA)
6. High isolation voltage between input and output  
(Viso : 5000Vrms).
7. Available package : DIP/ SMD/ H. (For Package Dimension  
please refer to page 82 )

**Applications**

1. Computer terminals.
2. High speed line receivers.
3. Interfaces with various data transmission equipment.
4. Switching regulators.

**Outside Dimension : Unit (mm)****Schematic : Top View**

1. Anode
2. Cathode
3. NC
4. Vo
5. GND
6. Vcc

**Absolute Maximum Ratings**

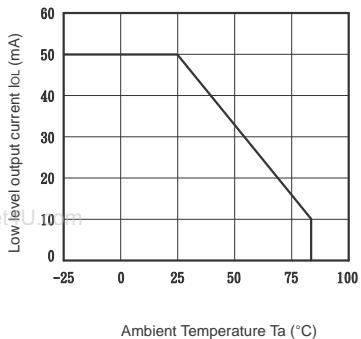
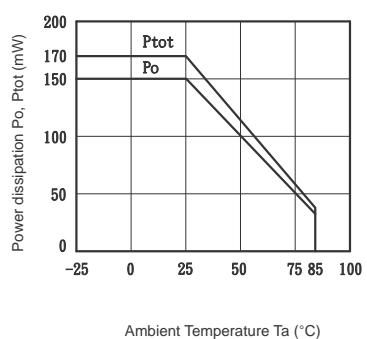
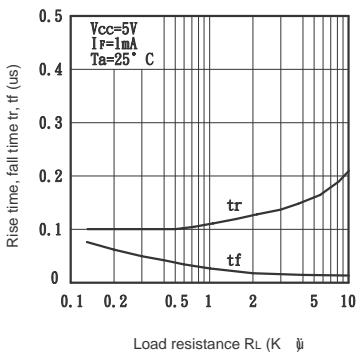
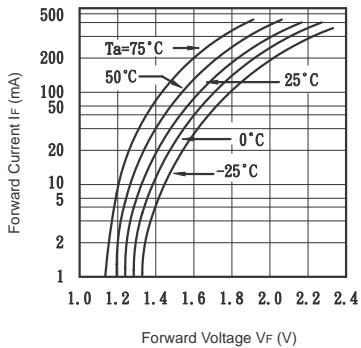
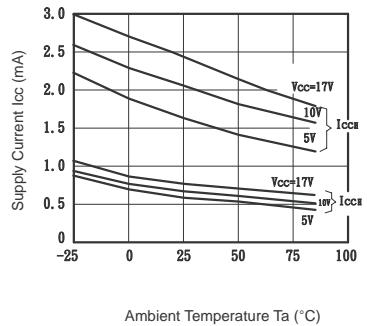
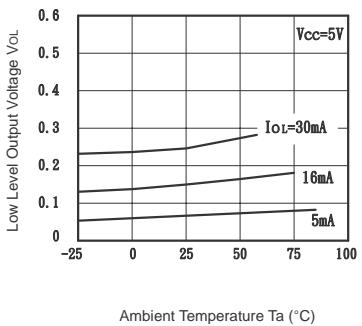
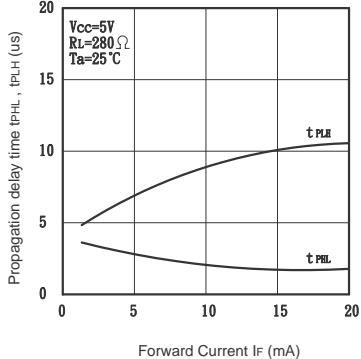
(Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	IF	50	mA
	Peak forward current	IFM	1	A
	Reverse voltage	VR	6	V
	Power dissipation	PD	70	mW
Output	Supply voltage	VCC	-0.5+0.17	A
	Output current	IO	50	A
	Power dissipation	PD	150	mW
	Total power dissipation	Ptot	170	mW
Isolation voltage 1 minute		Viso	5000	Vrms
Operating temperature		Topr	-25 to +85	°C
Storage temperature		Tstg	-40 to +125	°C
Soldering temperature		Tsol	260	°C

**Electro-optical Characteristics**

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	VF	IF = 10mA	—	1.2	1.4	V
	Peak forward voltage	VFM	IFM = 0.5A	—	—	3.5	V
	Reverse current	IR	VR = 4V	—	—	10	uA
	Terminal capacitance	Ct	V = 0, f = 1kHz	—	30	—	pF
Output	Operating supply voltage	VCC		4.5	—	17	V
	Low level output voltage	VOL	IOL = 16mA, Vcc = 5V, IF = 4mA	—	0.15	0.4	V
	High level output voltage	VOH	VCC = 5V, IF = 0	3.5	—	—	V
	Low level supply current	ICCL	VCC = 5V, IF = 1mA	—	1.7	3.8	mA
	High level supply current	ICCH	VCC = 5V, IF = 0	—	0.7	2.2	mA
Transfer characteristics	"High-Low" Threshold input current	IFHL	VCC = 5V, RL = 280ohm	—	0.5	1.0	mA
	"Low-High" Threshold input current	IFLH	VCC = 5V, RL = 280ohm	0.1	0.4	—	mA
	Hysteresis	IFLH / IFHL	VCC = 5V, RL = 280ohm	—	0.8	—	—
	Isolation resistance	Riso	Ta = 25°C, DC500V	5x10 <sup>10</sup>	10 <sup>11</sup>	—	ohm
	"High-Low" propagation delay time	tPHL		—	3	9	us
Response time	"Low-High" propagation delay time	tPLH	Ta = 25°C, Vcc = 5V,	—	5	15	
	Fall time	tf	IF = 1mA, RL = 280ohm	—	0.05	0.5	
	Rise time	tr		—	0.1	0.5	

**Fig.1** Low Level Output Current vs. Ambient Temperature**Fig.2** Power Dissipation vs. Ambient Temperature**Fig.3** Rise Time, Fall Time vs. Load Resistance**Fig.4** Forward Current vs. Forward Voltage**Fig.5** Supply Current vs. Ambient Temperature**Fig.6** Low Level Output Voltage vs. Ambient Temperature**Fig.7** Propagation Delay Time vs. Forward Current**Fig.8** Low Level Output Voltage vs. Low Level Output Current