



## Technical Data

# PST KP866LT

### HIGH POWER PHASE CONTROL THYRISTOR FOR PHASE CONTROL APPLICATIONS

#### Features :

- Blocking Capability up to 3600 V
- High dV/dt Capability
- All Diffused Structure
- Amplifying Gate Configuration
- Rugged Ceramic Hermetic Package

#### ELECTRICAL CHARACTERISTICS AND RATINGS

##### Blocking

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Repetitive peak reverse voltage	$V_{RRM}$		3600		V	$T_j = -40^\circ C$ to $125^\circ C$
Repetitive peak off-state voltage	$V_{DRM}$		3600		V	$T_j = -40^\circ C$ to $125^\circ C$
Non repetitive peak reverse voltage	$V_{RSM}$		3700		V	$T_j = -40^\circ C$ to $125^\circ C$
Repetitive peak reverse current	$I_{RRM}$		250		mA	$T_j = T_{jmax}$ , $V = V_{RRM}$
Repetitive peak off-state current	$I_{DRM}$		250		mA	$T_j = T_{jmax}$ , $V = V_{DRM}$

##### Conducting

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Average value of on-state current	$I_{T(AV)}$		1945		A	50 Hz sine wave, $180^\circ$ conduction, $T_c = 85^\circ C$
RMS value of on-state current	$I_{T(RMS)}$		3054		A	50 Hz sine wave, $180^\circ$ conduction, $T_c = 85^\circ C$
Surge non repetitive current	$I_{TSM}$		29.5		kA	50 Hz sine wave Half cycle
$I^2 t$	$I^2 t$		4351		kA <sup>2</sup> s	$V_R = 0$ $T_j = T_{jmax}$
Peak on-state voltage	$V_{TM}$		1.84		V	On-state current 2000 A, $T_j = T_{jmax}$
Threshold voltage	$V_{T(TO)}$		1.18		V	$T_j = T_{jmax}$
On-state slope resistance	$r_T$		0.328		$m\Omega$	$T_j = T_{jmax}$
Holding current	$I_H$			600	mA	$V_D = 12 V$ ; $I_T = 2.5 A$
Latching current	$I_L$			1000	mA	$V_D = 12 V$ ; $R_L = 12 \Omega$

**PST KP866LT****HIGH POWER PHASE CONTROL THYRISTOR****Triggering**

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Gate current	$I_{GT}$		300		mA	$V_D = 6 \text{ V}, R_L = 3 \Omega, T_j = -40 \text{ }^\circ\text{C}$
			400		mA	$V_D = 6 \text{ V}, R_L = 3 \Omega, T_j = 25 \text{ }^\circ\text{C}$
			125		mA	$V_D = 6 \text{ V}, R_L = 3 \Omega, T_j = 125 \text{ }^\circ\text{C}$
Gate voltage	$V_{GT}$		5		V	$V_D = 6 \text{ V}, R_L = 3 \Omega, T_j = -40 \text{ }^\circ\text{C}$
			3.5		V	$V_D = 6 \text{ V}, R_L = 3 \Omega, T_j = 0 \div 125 \text{ }^\circ\text{C}$
			0.3		V	$V_D = V_{DRM}, R_L = 1 \text{ k}\Omega, T_j = 125 \text{ }^\circ\text{C}$
Peak gate current	$I_{GM}$		10		A	
Peak reverse gate voltage	$V_{RGM}$		8		V	
Peak gate power dissipation	$P_{GM}$		180		W	
Average gate power dissipation	$P_{G(AV)}$		5		W	

**Switching**




Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Critical rate of rise of on-state current	$di/dt$		200		A/ $\mu$ s	$I_G = 5 \cdot I_{GT}, t_r = 1 \mu\text{s}, V_{DRM} \leq 2000 \text{ V}, T_j = T_{jmax}$
Critical rate of rise of on-state voltage	$dv/dt$		1000		V/ $\mu$ s	Linear ramp up to 75% of $V_{DRM}$
Gate controlled delay time	$t_d$			3	$\mu$ s	$I_{TM} = 50 \text{ A}, V_D = 67\% V_{DRM}, V_G = 20 \text{ V}$ $R_G = 20 \Omega, t_r = 0.1 \mu\text{s}, t_p = 20 \mu\text{s}$
Turn-off time	$t_q$			400	$\mu$ s	$I_{TM} = 2000 \text{ A}; di/dt = 10 \text{ A}/\mu\text{s}; V_R \geq 100 \text{ V}$ $dV/dt = 20 \text{ V}/\mu\text{s}$ linear to 80% $V_{DRM}$ $V_G = 0 \text{ V}; T_j = T_{jmax}$
Reverse recovery charge	$Q_{rr}$				$\mu$ C	$I_T = 500 \text{ A}$ $di/dt = 20 \text{ A}/\mu\text{s}$
Reverse recovery current	$I_{rr}$				A/ $\mu$ s	$V_R \geq 50 \text{ V}$ $T_j = T_{jmax}$

**Thermal and mechanical**

Parameter	Symbol	Min	Max	Typ	Unit	Conditions
Operating temperature	$T_j$	-40	125		$^\circ\text{C}$	
Storage temperature	$T_{stg}$	-40	150		$^\circ\text{C}$	
Thermal resistance junction to case	$R_{th(j-c)}$		0.0075		$^\circ\text{C/W}$	Double side cooled, 180° SIN
Thermal resistance case to sink	$R_{th(c-s)}$		0.002		$^\circ\text{C/W}$	Double side cooled, mounting surfaces smooth, flat and greased
Mounting force	$F$	40	50		kN	
Weight	$W$			1200	g	

# PST KP866LT

## HIGH POWER PHASE CONTROL THYRISTOR

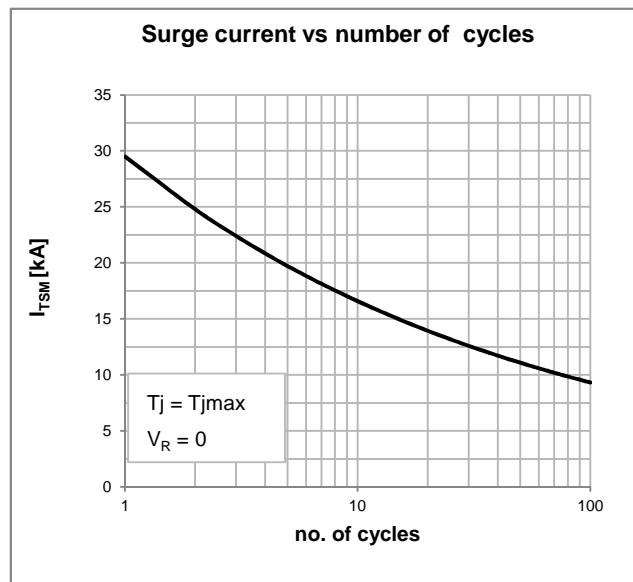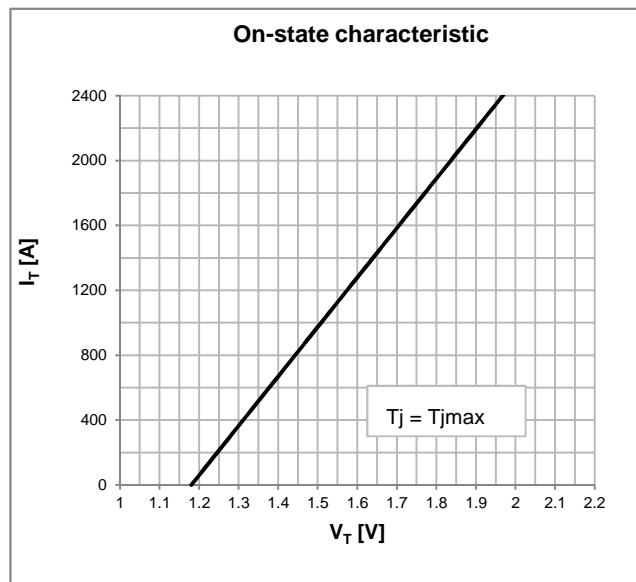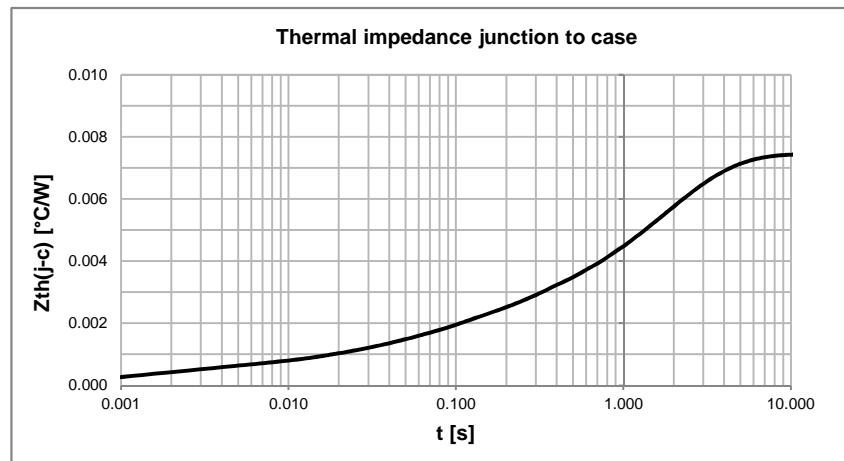

### OUTLINE AND DIMENSIONS

