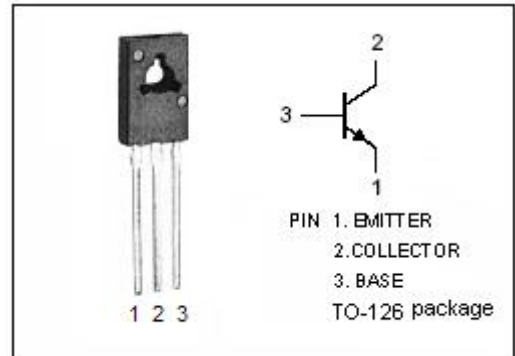


isc Silicon NPN Power Transistor
KSC2682
DESCRIPTION


- High voltage
- Low Saturation Voltage
- Complementary to KSA1142 PNP transistor
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- The KSC2682 is designed for use in audio frequency power amplifier


ABSOLUTE MAXIMUM RATINGS (T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	180	V
V _{CER}	Collector-Emitter Voltage R _{BE} =150 Ω	180	V
V _{CEO}	Collector-Emitter Voltage	180	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current-Continuous	0.1	A
P _C	Collector Power Dissipation @ T _c =25°C	8	W
T _J	Junction Temperature	-55~150	°C
T _{stg}	Storage Temperature Range	-55~150	°C

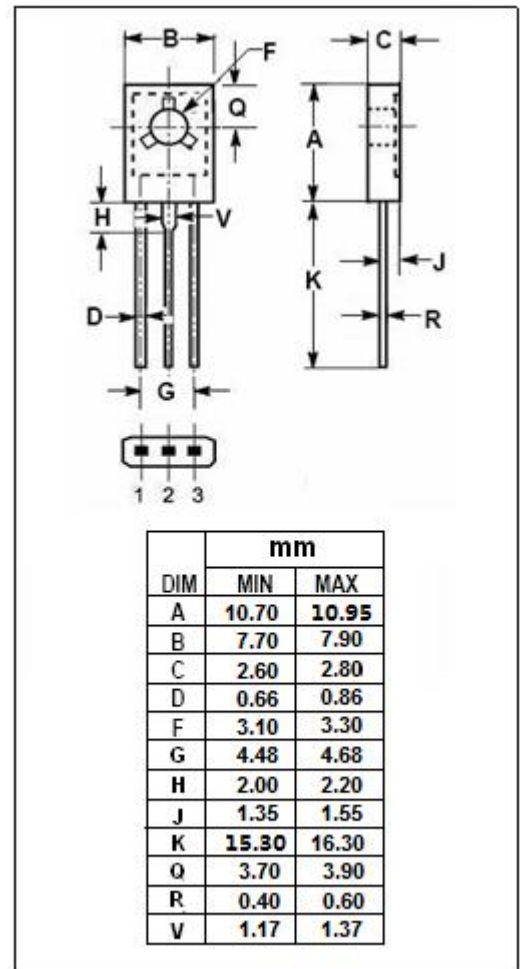

ELECTRICAL CHARACTERISTICS

 T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C =50mA; I _B = 5mA			0.5	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C =50mA; I _B = 5mA			1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = 180V ; I _E = 0			1	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = 3V; I _C = 0			1	μ A
h _{FE-1}	DC Current Gain	I _C = 1mA ; V _{CE} = 5V	90			
h _{FE-2}	DC Current Gain	I _C = 10mA ; V _{CE} = 5V	100		320	
NF	Noise figure	I _C = 1mA ; V _{CE} = 10V; RG=10KΩ,F=1KHz	4			dB

◆ h_{FE-2} Classifications

O	Y
100-200	160-320

Notice:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.