

KSH13005A



KSH13005A

Switch Mode series NPN silicon Power Transistor


- High voltage, high speed power switching
- Suitable for switching regulator, inverters motor controls

Absolute Maximum Ratings TC=25°C unless otherwise noted

4 Amperes
NPN Silicon Power Transistor
75 Watts

| CHARACTERISTICS | SYMBOL | RATING | UNIT |
|-------------------------------------|-----------|---------|------|
| Collector-Base Voltage | V_{CBO} | 700 | V |
| Collector-Emitter Voltage | V_{CEO} | 400 | V |
| Emitter-Base Voltage | V_{EBO} | 9 | V |
| Collector Current(DC) | I_C | 4 | A |
| Collector Current(Pulse) | I_{CP} | 8 | A |
| Base Current | I_B | 2 | A |
| Collector Dissipation(Tc=25°C) | P_C | 75 | W |
| Max. Operating Junction Temperature | T_J | 150 | °C |
| Storage Temperature | T_{STG} | -65~150 | °C |

TO-220
1. Base
2. Collector
3. Emitter



Electrical Characteristics TC=25°C unless otherwise noted

| CHARACTERISTICS | SYMBOL | Test Condition | Min | Typ. | Max | Unit |
|---------------------------------------|------------------------|--|---------|------|-----------------|-------------|
| Collector-Emitter Breakdown Voltage | V_{CEO} | $I_C=10mA, I_B=0$ | 400 | | | V |
| Emitter Cut-off Current | I_{EBO} | $V_{EB}=9V, I_C=0$ | | | 1 | mA |
| *DC Current Gain | h_{FE1} h_{FE2} | $V_{CE}=5V, I_C=1A$ $V_{CE}=5V, I_C=2A$ | 10 8 | | 60 40 | |
| *Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C=1A, I_B=0.2A$ $I_C=2A, I_B=0.5A$ $I_C=4A, I_B=1A$ | | | 0.5 0.6 1 | V V V |
| *Base-Emitter Saturation Voltage | $V_{BE(sat)}$ | $I_C=1A, I_B=0.2A$ $I_C=2A, I_B=0.5A$ | | | 1.2 1.6 | V V |
| Output Capacitance | C_{ob} | $V_{CB}=10V, f=0.1MHz$ | | 65 | | pF |
| Current Gain Bandwidth Product | f_T | $V_{CE}=10V, I_C=0.5A$ | 4 | | | MHz |
| Turn on Time | t_{on} | $V_{CC}=125V, I_C=2A$ $I_{B1}=0.4A, I_{B2}=-0.4A$ $R_L=62.5\Omega$ | | | 0.8 | μs |
| Storage Time | t_{stg} | | | | 4.0 | μs |
| Fall Time | t_F | | | | 0.9 | μs |

* Pulse Test: Pulse Width \leq 300 μs , Duty Cycle \leq 2%

Note.

| hFE1 Classification | R | 19 ~ 28 |
|------------------------|---|---------|
| | O | 26 ~ 35 |
| | Y | 33 ~ 40 |

Package Mark information.

| S | S | SemiHow Symbol |
|-----------|-----|-----------------------------|
| YWW Z | YWW | Y: year code, WW; week code |
| KSH13005A | Z | hFE1 Classification |

Typical Characteristics

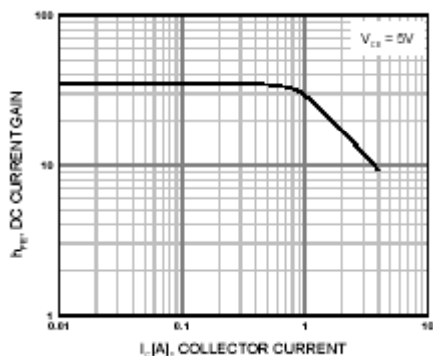


Figure 1. DC current Gain

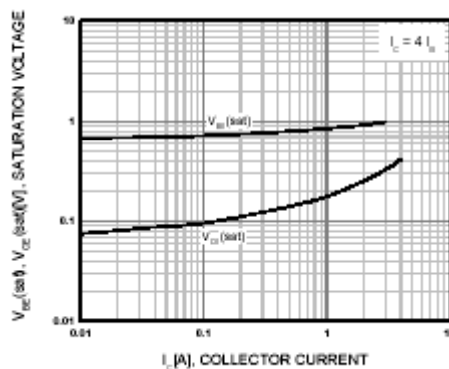


Figure 2. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

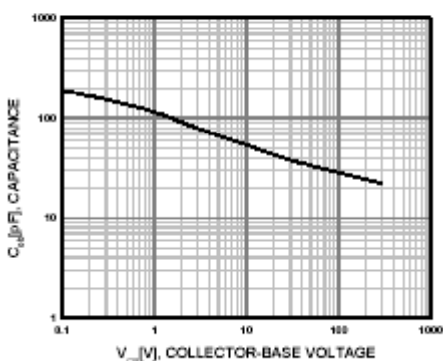


Figure 3. Collector Output Capacitance

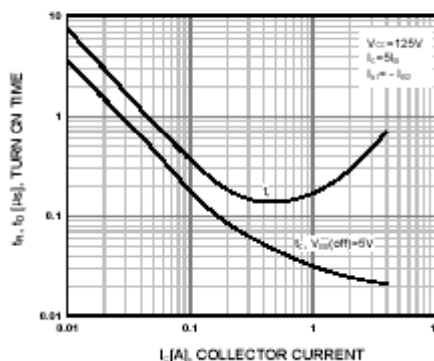


Figure 4. Turn On Time

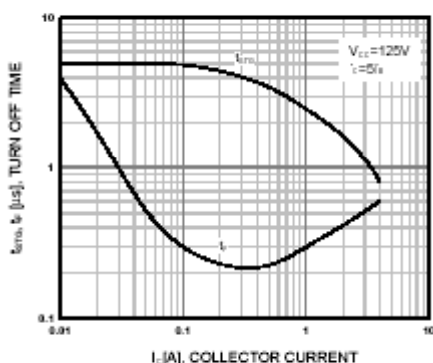


Figure 5. Turn Off Time



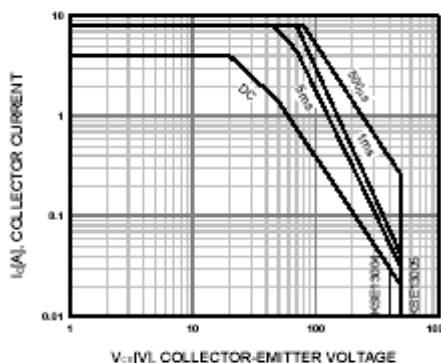


Figure 6. Safe Operating Area

Typical Characteristics (Continued)**Figure 7. Power Derating**

Package Dimension


TO-220 (A)

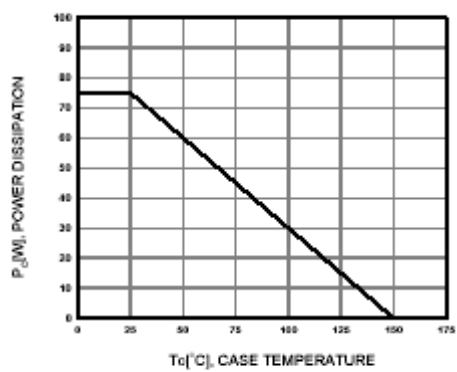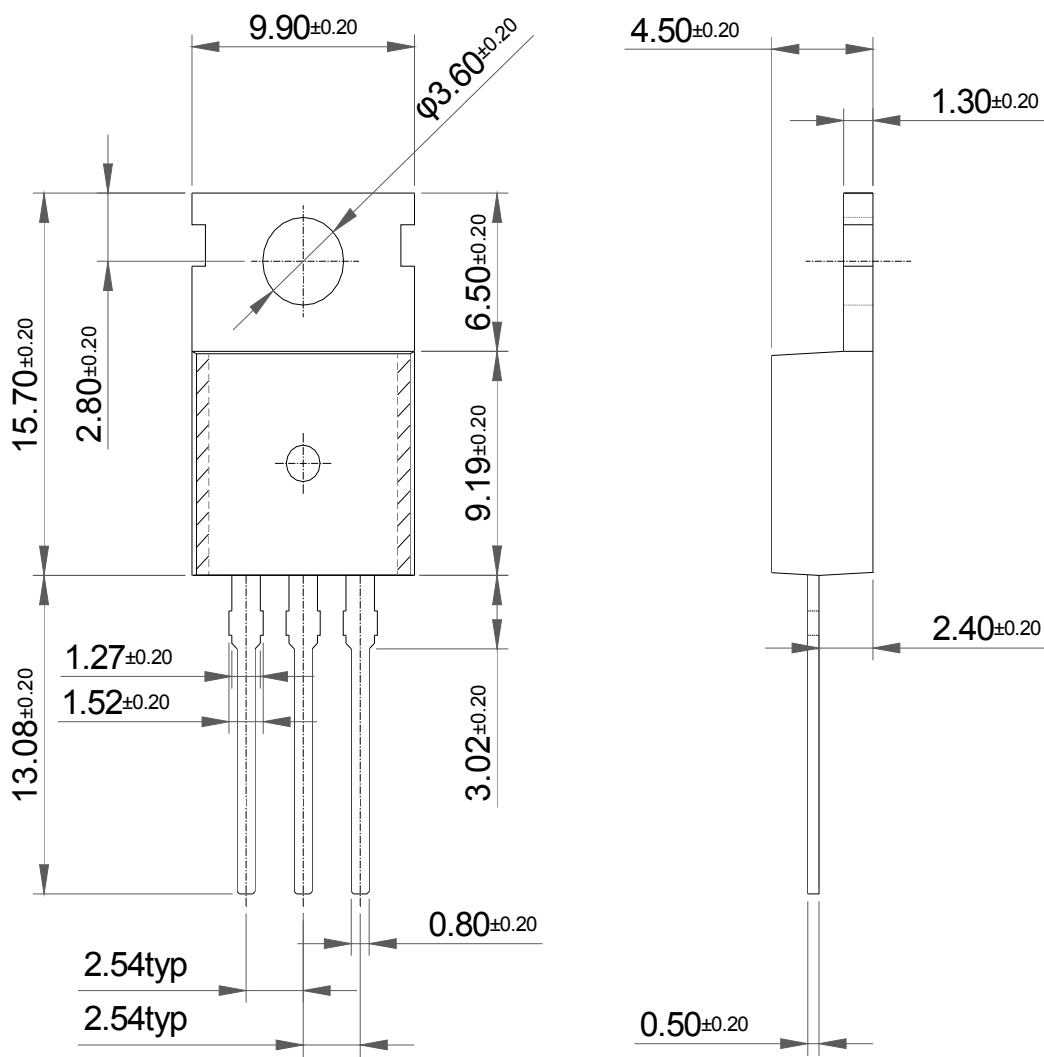

Dimensions in Millimeters

Package Dimension

TO-220 (B)

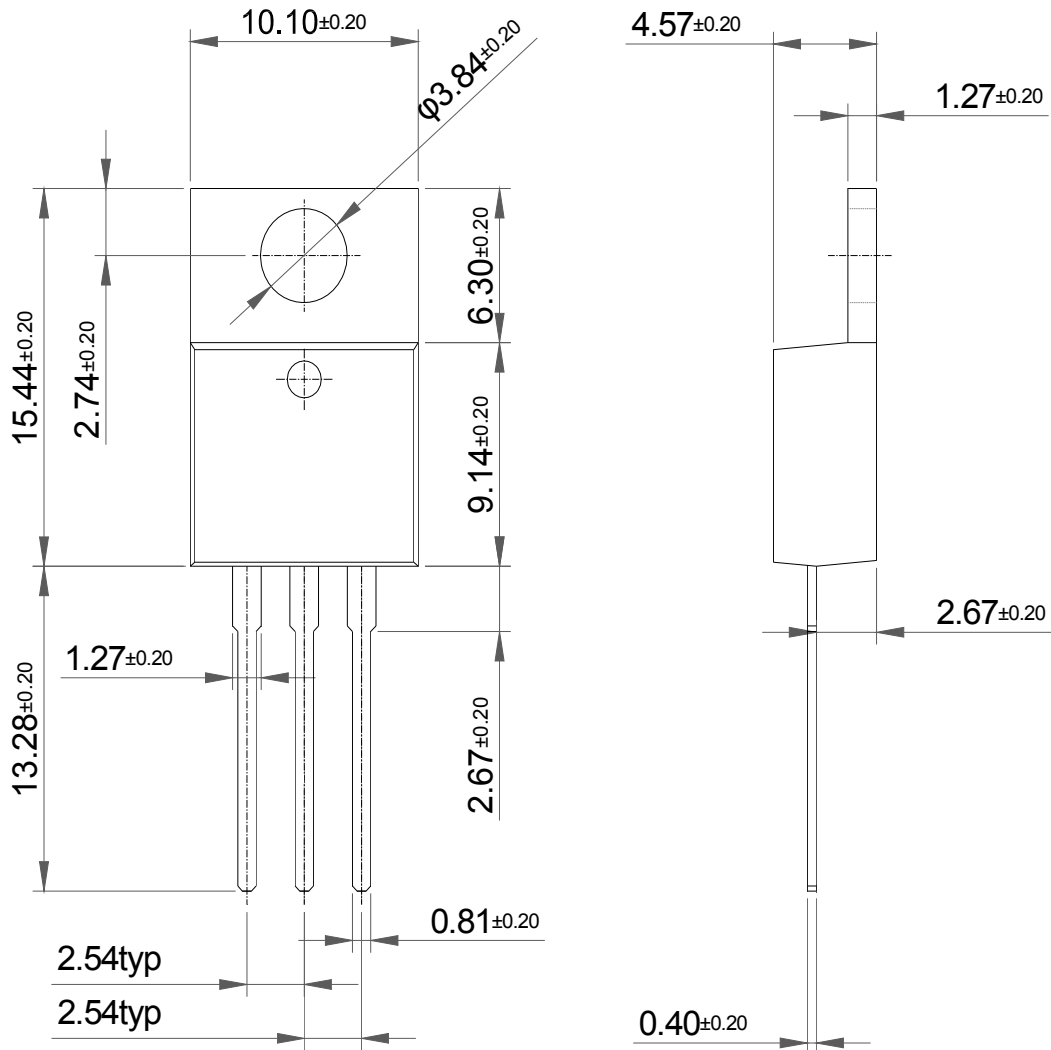

Dimensions in Millimeters