


KST-CF116MVD-120F

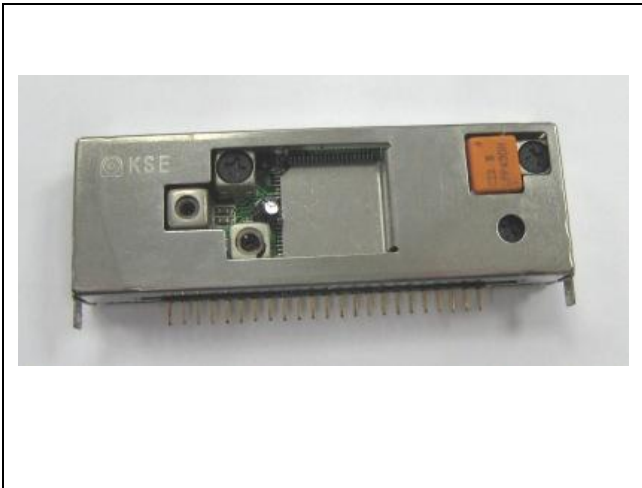

Feature

IC Solution	ST TDA7540
Band	FM/MW
Optional	LW/SW/RDS

Version	Dimension (mm)	Supply Voltage
JAPAN	70.4*22.9*12.2	8.5V~9.5V

Specification

FM

Receiving Band	64-108MHz
Usable Sensitivity	8dBuV
Image Rejection	60dB
IF Rejection	80dB
Stereo Separation	28dB
S/N Ratio (Mono 22.5KHz)	55dB

AM

Receiving Band	520-1720KHz
Usable Sensitivity	25dBuV
Image Rejection	70dB
IF Rejection	70dB
S/N Ratio Mono	55dB



NO.	CONNECTION
1	ANT
2	RF_GND
3	RF_GND
4	RF_GND
5	N.C
6	RF_GND
7	+5V
8	SW_FLAG
9	FSU
10	+8.5V
11	N.C
12	AMST/MP
13	SSTOP
14	QUALYOUT
15	AFS
16	VT
17	MPXW
18	MPX
19	R_CH
20	L_CH
21	GND
22	SDA
23	SCL

