KSV39A

Solenoid Valve

Applications


Massager, Medical Equipment, etc



Specifications

1. Rated Voltage	DC5.0V
2. Rated Current	0.5A
3. Release Time	DC4.5~5.5V
4. Resistance	100ΜΩ
5. Control Accuracy	0~100mmHg range is minimum 0.1mmHg, maximum7.5mmHg 100~200mmHg range is 10mmHg 200~300mmHg range is 15mmHg.
6. Insulation Level	E
7. Apply For	Air

Drawing

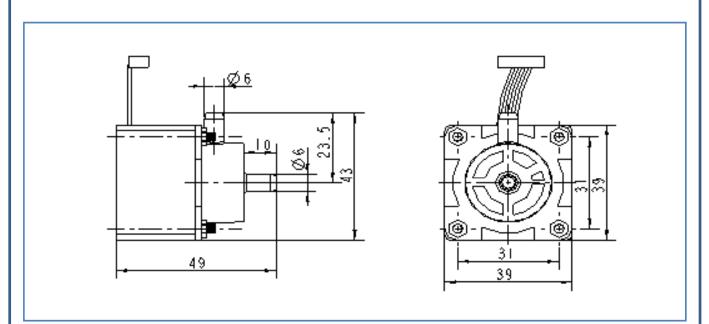



www.yujinelectric.com