


KSV8WA Solenoid Valve



Specifications

| | | |
|----------------------------|---|-------------|
| 1. Rated Voltage | DC12V | DC24V |
| 2. Rated Current | 225x3=675 mA | 120x3=360mA |
| 3. Exhaust Time | Max. 4.0 seconds from 450mmHg reduce to 20 mmHg at 1500CC tank. | |
| 4. Resistance | 53Ω ± 10% | 200Ω ± 10% |
| 5. Leakage | Max. 15mmHg/min from 450mmHg at 1500CC tank. | |
| 6. Insulation Level | E | E |
| 7. Apply For | Air | Air |

PHYSICAL DIMENSION

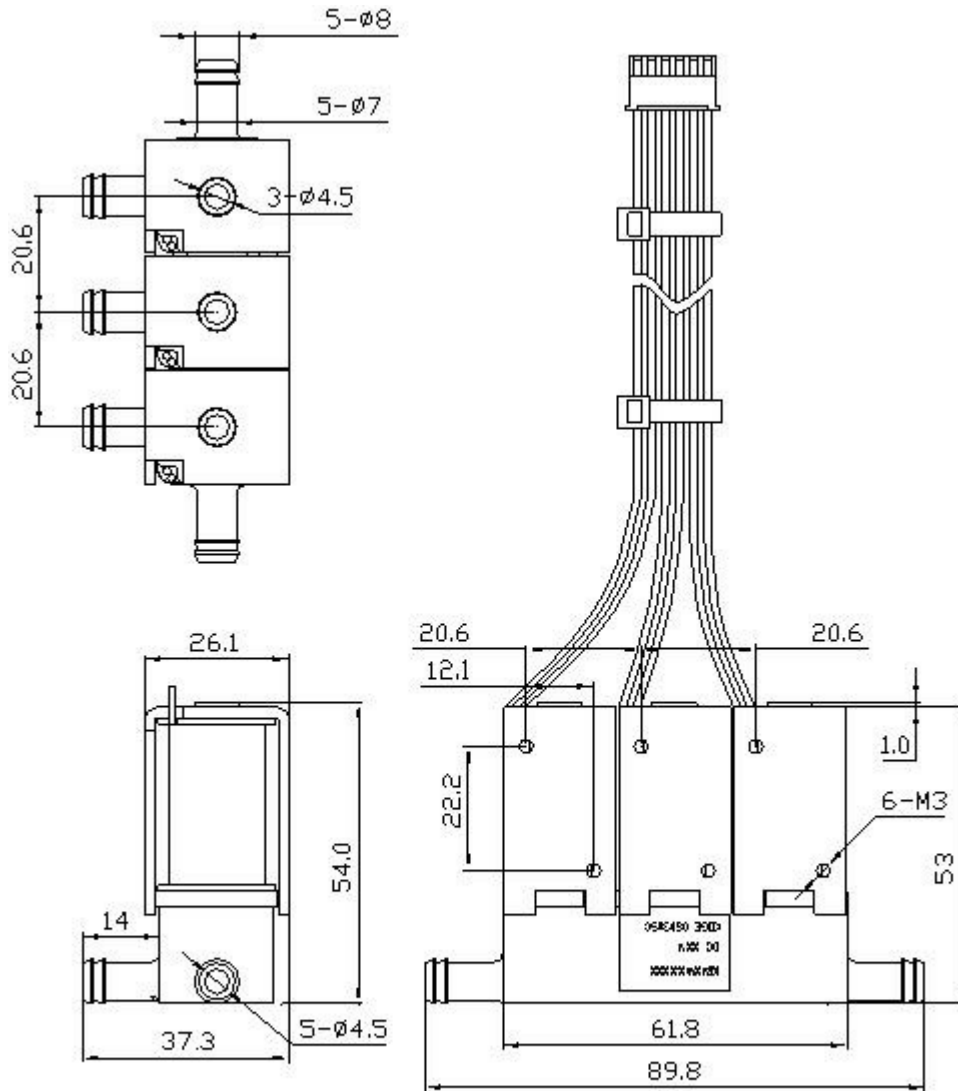

UNIT:mm