


GENERAL PURPOSE DARLINGTON TRANSISTOR.

### FEATURES

- High DC Current Gain :  $h_{FE}=3000(\text{Min.})$  ( $V_{CE}=-2V, I_C=-1A$ )
- Complementary to KTD2424.

### MAXIMUM RATING ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	-80	V
Collector-Emitter Voltage	$V_{CEO}$	-60	V
Emitter-Base Voltage	$V_{EBO}$	-10	V
Collector Current	$I_C$	-3	A
Base Current	$I_B$	-0.5	A
Collector Power Dissipation ( $T_c=25^\circ\text{C}$ )	$P_C$	25	W
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 ~ 150	$^\circ\text{C}$

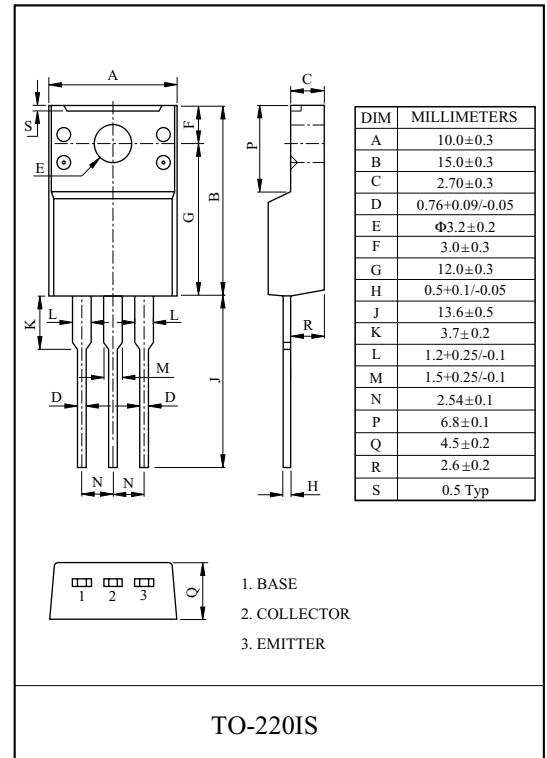

### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=-80V, I_E=0$	-	-	-20	$\mu\text{A}$	
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=-10V, I_C=0$	-	-	-100	$\mu\text{A}$	
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-10\text{mA}, I_B=0$	-60	-	-	V	
DC Current Gain	$h_{FE}(1)$	$V_{CE}=-2V, I_C=-1A$	3000	-	-		
	$h_{FE}(2)$	$V_{CE}=-2V, I_C=-3A$	1000	-	-		
Saturation Voltage	Collector-Emitter	$V_{CE(sat)}$	$I_C=-3A, I_B=-30\text{mA}$	-	-	-1.5	V
	Base-Emitter	$V_{BE(sat)}$	$I_C=-3A, I_B=-30\text{mA}$	-	-	-2.8	