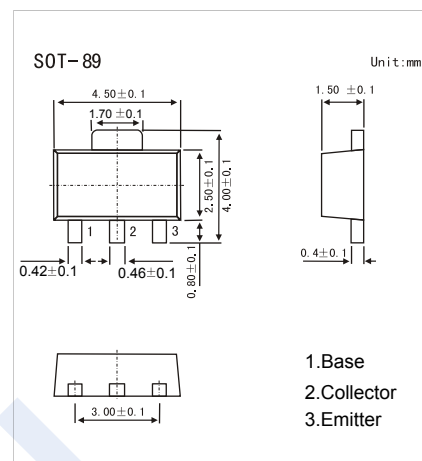


PNP Transistors

KXA1502

■ Features

- Collector Power Dissipation: $P_c=0.5W$
- Collector Current: $I_c=-1.5A$

■ Absolute Maximum Ratings $T_a = 25^{\circ}C$

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	-40	V
Collector-Emitter Voltage	V_{CE0}	-20	V
Emitter-Base Voltage	V_{EB0}	-5	V
Collector Current -Continuous	I_c	-1.5	A
Collector Power Dissipation	P_c	0.5	W
Junction Temperature	T_j	150	$^{\circ}C$
Storage Temperature	T_{stg}	-55 to 150	$^{\circ}C$

■ Electrical Characteristics $T_a = 25^{\circ}C$

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_c=-100\mu A, I_E=0$	-40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_c=-1mA, I_B=0$	-20		-40	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-100\mu A, I_c=0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB}=-40V, I_E=0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=-5V, I_c=0$			-0.1	μA
DC current gain	h_{FE}	$V_{CE}=-1V, I_c=-100mA$	160		320	
		$V_{CE}=-1V, I_c=-800mA$	40			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_c=-800mA, I_B=-80mA$			-0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_c=-800mA, I_B=-80mA$			-1.2	V
Output capacitance	C_{ob}	$V_{CB}=-10V, I_E=0, f=1MHz$			20	pF
Transition frequency	f_T	$V_{CE}=-6V, I_c=-20mA, f=30MHz$	100			MHz

■ Marking

Marking	B772
---------	------

PNP Transistors

KXA1502

■ Typical Characteristics

