


Pin Type-Φ9.6mm

MAGNETIC INDICATOR

KXG0912C




Dimension

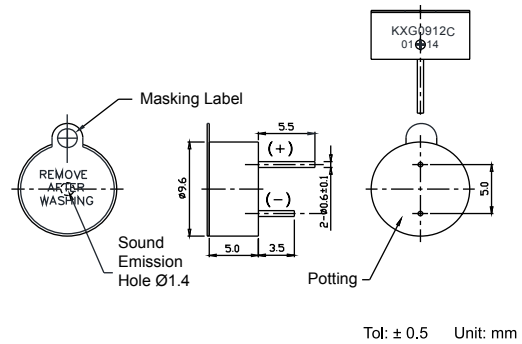

Characteristic

Rated Frequency (Hz)	2,730 ± 400
Rated Voltage (VDC)	12.0
Current Consumption (mA)	Max. 30
Sound Pressure Level (dB)	Min. 85 (Typical 90)@10cm
Operating Voltage Range (VDC)	10.0 ~ 13.0
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +85
Dimension (mm)	Φ9.6xH5.0
Material	PBT (Black)

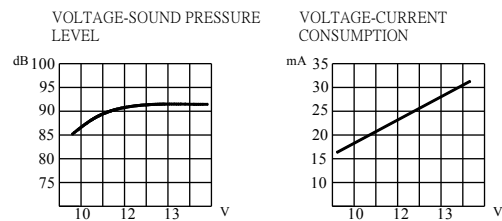


Pin Type-Φ12.0mm

MAGNETIC INDICATOR

KXG1201C



Dimension

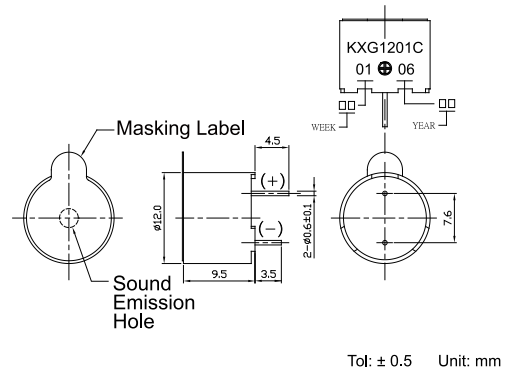

Characteristic

Rated Frequency (Hz)	2,300 ± 300
Rated Voltage (VDC)	1.5
Current Consumption (mA)	Max. 30
Sound Pressure Level (dB)	Min. 80 (Typical 85)@10cm
Operating Voltage Range (VDC)	1.2 ~ 3.0
Operating Temperature (°C)	-30 ~ +70
Storage Temperature (°C)	-40 ~ +85
Dimension (mm)	Φ12.0xH9.5
Material	PBT+15% Glass (Black)

