


Pin Type-Φ24.5mm

MAGNETIC TRANSDUCER


KXG2512-HB



Dimension

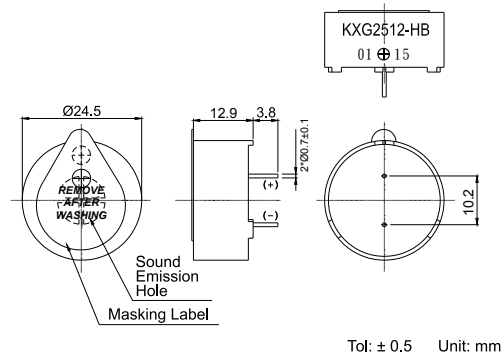

Characteristic

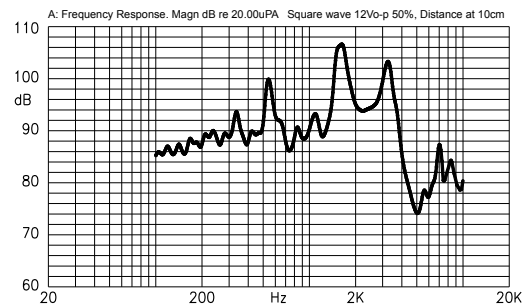


B Magnetic Buzzer


SMD Type

MAGNETIC INDICATOR


KTG0905CL KTG0912CL



Dimension

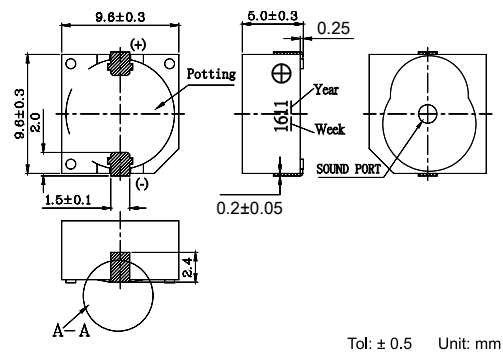

Characteristic

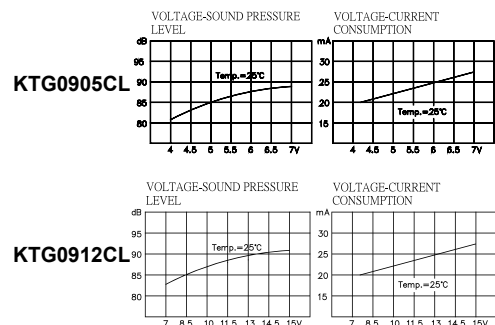

Model Number	KTG0905CL	KTG0912CL
Rated Frequency (Hz)	2,700 $\pm$ 300	
Rated Voltage (VDC)	5.0	12.0
Current Consumption (mA)	Max. 30	
Sound Pressure Level (dB)	Min. 80 (Typical 85)@10cm	Min. 85 (Typical 90)@10cm
Operating Voltage Range (VDC)	4.0 ~ 7.0	7.0 ~ 15.0
Operating Temperature (°C)	-40 ~ +85	
Storage Temperature (°C)	-40 ~ +85	
Dimension (mm)	L9.6xW9.6xH5.0	
Material	PPS (Black)	