

L-53SF7BT


### Features

- MECHANICALLY AND SPECTRALLY MATCHED TO THE L-51P3C PHOTOTRANSISTOR.
- BOTH WATER CLEAR LENS AND BLUE TRANSPARENT LENS AVAILABLE HIGH POWER OUTPUT.

### Description

SF7 made with Gallium Aluminum Arsenide infrared Emitting diodes.

### Package Dimensions

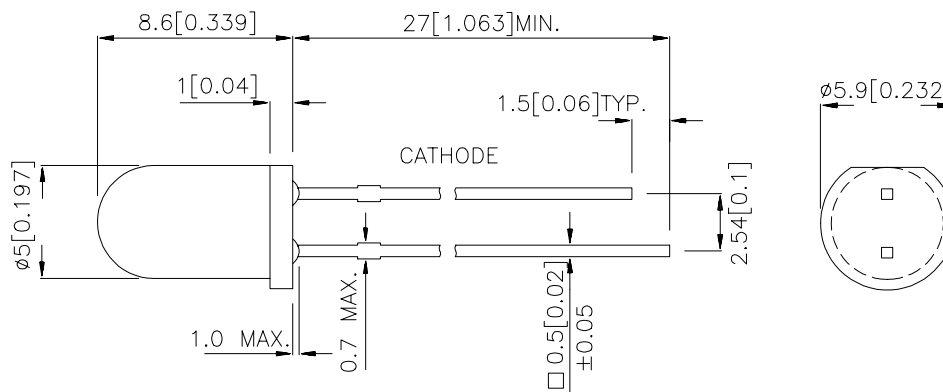

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25 (0.01)$  unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

## Selection Guide

| Part No.  | Dice   | Lens Type        | Po(mW/sr)<br>@ 20 mA *50mA |      | Viewing<br>Angle |
|-----------|--------|------------------|----------------------------|------|------------------|
|           |        |                  | Min.                       | Typ. | 2θ1/2            |
| L-53SF7BT | GaAlAs | BLUE TRANSPARENT | 10                         | 40   | 30°              |
|           |        |                  | 50                         | 100  | 30°              |

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. \* Luminous intensity with asterisk is measured at 50mA.

## Electrical / Optical Characteristics at T<sub>A</sub>=25°C


| Parameter                | P/N | Symbol         | Typ. | Max. | Unit | Condition                  |
|--------------------------|-----|----------------|------|------|------|----------------------------|
| Forward Voltage          | SF7 | V <sub>F</sub> | 1.4  | 1.6  | V    | I <sub>F</sub> =20mA       |
| Reverse Current          | SF7 | I <sub>R</sub> | -    | 10   | uA   | V <sub>R</sub> =5V         |
| Junction Capacitance     | SF7 | C              | 30   | -    | pF   | V <sub>F</sub> =0V, f=1MHz |
| Peak Spectral Wavelength | SF7 | P              | 850  | -    | nm   | I <sub>F</sub> =20mA       |
| Spectral Bandwidth       | SF7 | Δλ 1/2         | 50   | -    | nm   | I <sub>F</sub> =20mA       |

## Absolute Maximum Ratings at T<sub>A</sub>=25°C

| Parameter                  | Symbol              | SF7      | Units |
|----------------------------|---------------------|----------|-------|
| Power Dissipation          | P <sub>T</sub>      | 100      | mW    |
| Forward Current            | I <sub>F</sub>      | 50       | mA    |
| Peak Forward Current[1]    | i <sub>FS</sub>     | 1        | A     |
| Reverse Voltage            | V <sub>R</sub>      | 5        | V     |
| Operating Temperature      | T <sub>A</sub>      | -40~ +85 | °C    |
| Storage Temperature        | T <sub>STG</sub>    | -40~ +85 | °C    |
| Lead Solder Temperature[2] | 260°C For 5 Seconds |          |       |

Notes:

1. 1/100 Duty Cycle, 10us Pulse Width.
2. 2mm below package base.

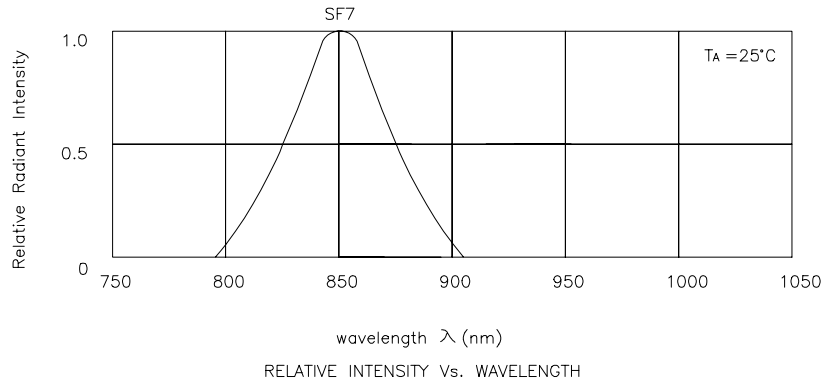

## L-53SF7BT

