

Infrared LED

L1939 series

$\phi 300 \mu\text{m}$ emission spot, no electrode in emission area



Features

- Small emission spot: $\phi 300 \mu\text{m}$
- Wide directivity
- High reliability, long life

Applications

- Auto-focus
- Optical switches
- Mark sensors

■ Absolute maximum ratings (Ta=25 °C)


| Parameter | Symbol | Condition | Value | Unit |
|-----------------------|--------|--|---------------|------|
| Forward current | IF | | 100 | mA |
| Reverse voltage | VR | | 5 | V |
| Pulse forward current | IFP | Pulse width=10 μs Duty ratio=1 % | 1.5 | A |
| Operating temperature | Topr | | -30 to +85 | °C |
| Storage temperature | Tstg | | -40 to +100 * | °C |

* L1939 is guaranteed to resist temperature cycle test of up to 5 cycles.


■ Electrical and optical characteristics (Ta=25 °C)

| Parameter | Symbol | Condition | L1939 | | | L1939-04 | | | Unit |
|--------------------------|-----------------|----------------------|-------|------|------|----------|------|------|-------------------------|
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Peak emission wavelength | λ_p | IF=50 mA | 870 | 890 | 920 | 870 | 890 | 920 | nm |
| Spectral half width | $\Delta\lambda$ | IF=50 mA | - | 50 | - | - | 50 | - | nm |
| Forward voltage | VF | IF=50 mA | - | 1.4 | 1.5 | - | 1.4 | 1.5 | V |
| Pulse forward voltage | VFP | IF=1.5 A | - | 2.7 | 3.4 | - | 2.7 | 3.4 | V |
| Reverse current | IR | VR=5 V | - | - | 5 | - | - | 5 | μA |
| Radiant flux | ϕ_e | IF=50 mA | 8.0 | 10.0 | - | 2.0 | 2.8 | - | mW |
| Radiant illuminance | PE | IF=50 mA | - | 0.4 | - | - | 0.35 | - | mW/cm^2 |
| Rise time | tr | IF=50 mA, 10 to 90 % | - | 0.45 | 0.7 | - | 0.45 | 0.7 | μs |
| Fall time | tf | IF=50 mA, 90 to 10 % | - | 0.45 | 0.7 | - | 0.45 | 0.7 | μs |


Emission spectrum

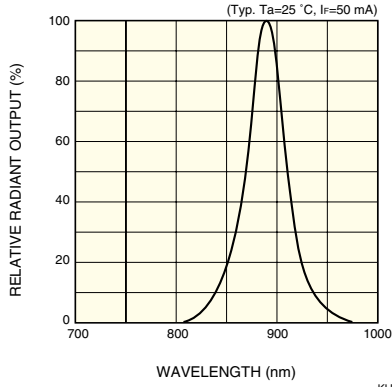


Radiant flux vs. forward current

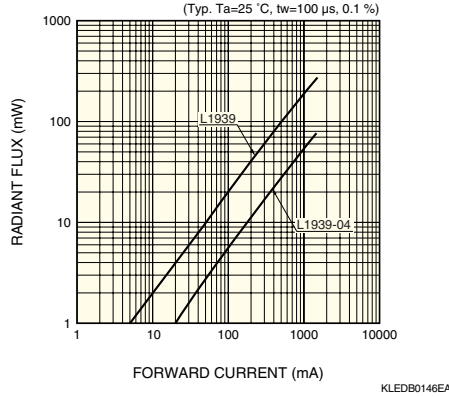


Forward current vs. forward voltage

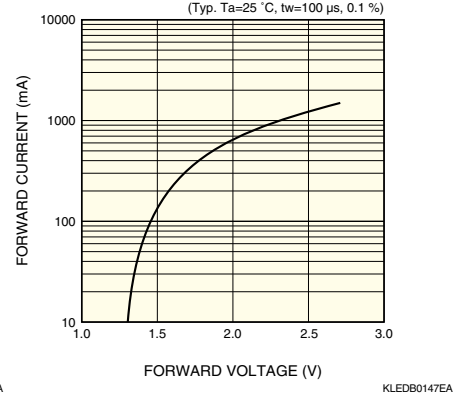


Directivity

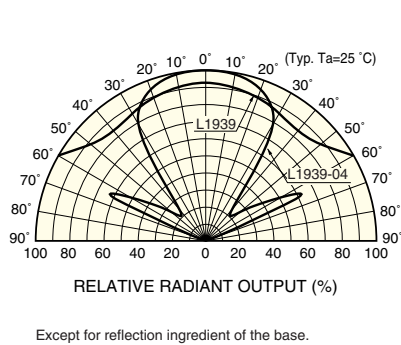


Radiant output vs. ambient temperature

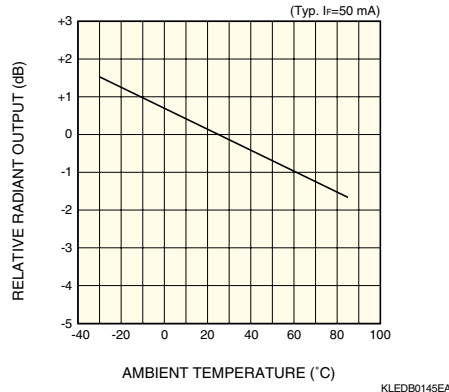

Allowable forward current vs. ambient temperature

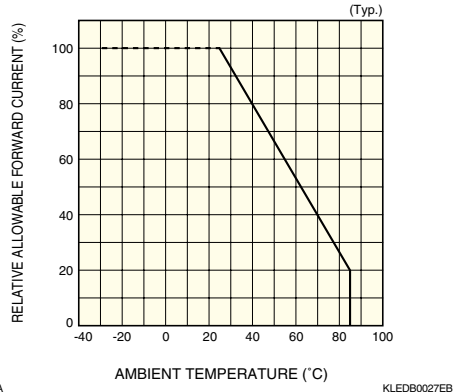

Allowable forward current vs. duty ratio

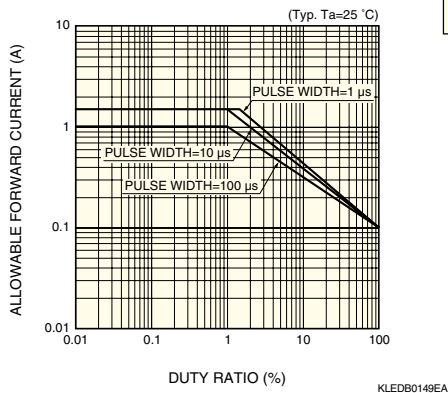

Dimensional outlines (unit: mm)

