
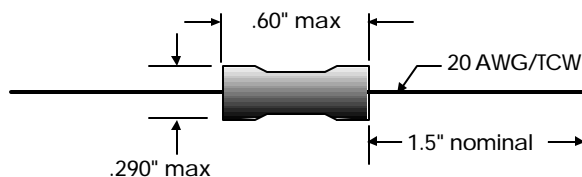


LA4S Power Line Chokes

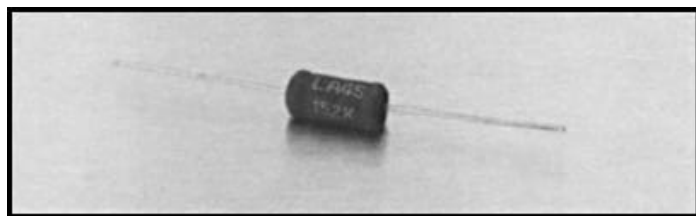

Dimensions include shrink tubing

INDUCTANCES 3.9 μ H to 18,000 μ H

OPERATING TEMPERATURE - 55°C to +125°C

INDUCTANCE TOLERANCE \pm 10%.

SLEEVING Coils covered with Poly-Olefin shrink tubing

SATURATION CURRENT Lowers inductance 10%

TESTING LCR Bridge at 1kHz

MARKING Part number printed on part

PACKAGING Bulk or Tape and Reel.

PART NUMBER	INDUCTANCE (μ H)	DC RESISTANCE OHMS MAXIMUM (W)	SATURATION CURRENT (DC AMPS)	SUGGESTED RATED CURRENT (AC AMPS)
LA4S-3R9K	3.9	.019	7.3	1.28
LA4S-4R7K	4.7	.022	6.3	1.28
LA4S-5R6K	5.6	.024	5.6	1.28
LA4S-6R8K	6.8	.026	5.3	1.28
LA4S-8R2K	8.2	.028	4.5	1.28
LA4S-100K	10	.033	4.1	1.28
LA4S-120K	12	.037	3.6	1.28
LA4S-150K	15	.040	3.3	1.28
LA4S-180K	18	.044	3.0	1.28
LA4S-220K	22	.050	2.7	1.28
LA4S-270K	27	.056	2.5	1.28
LA4S-330K	33	.076	2.2	1.008
LA4S-390K	39	.094	2.0	.804
LA4S-470K	47	.109	1.8	.804
LA4S-560K	56	.140	1.7	.804
LA4S-680K	68	.131	1.5	.804
LA4S-820K	82	.152	1.4	.804
LA4S-101K	100	.208	1.2	.632
LA4S-121K	120	.283	1.1	.508
LA4S-151K	150	.340	1.0	.508
LA4S-181K	180	.362	.95	.508
LA4S-221K	220	.430	.86	.508
LA4S-271K	270	.557	.77	.400
LA4S-331K	330	.665	.70	.400
LA4S-391K	390	.772	.64	.400
LA4S-471K	470	1.15	.59	.315
LA4S-561K	560	1.27	.54	.315
LA4S-681K	680	1.61	.49	.250
LA4S-821K	820	1.96	.44	.200
LA4S-102K	1000	2.30	.40	.200
LA4S-122K	1200	2.65	.35	.200
LA4S-152K	1500	3.45	.33	.158
LA4S-182K	1800	4.03	.29	.158
LA4S-222K	2200	4.48	.27	.158
LA4S-272K	2700	5.40	.24	.125
LA4S-332K	3300	6.56	.22	.125
LA4S-392K	3900	8.63	.20	.100
LA4S-472K	4700	9.66	.18	.100
LA4S-562K	5600	13.9	.166	.082
LA4S-682K	6800	16.3	.151	.082
LA4S-822K	8200	20.8	.136	.065
LA4S-103K	10000	26.4	.125	.050
LA4S-123K	12000	29.9	.144	.050
LA4S-153K	15000	42.5	.098	.039
LA4S-183K	18000	48.3	.091	.039