



## LA7860, 7860M

### Deflection IC Supports Multisynch Display

#### Overview

The LA7860, 7860M display deflection integrated circuit supports multisynch and high-definition displays. Implemented through proprietary Sanyo circuit technology, it offers unsurpassed low-noise performance.

Its outstanding characteristic is the simplified processing it offers for screen settling in response to fluctuations in horizontal scan frequency, which has required numerous components and complex control procedures in the past. This has been made possible through a combination of the conventional phase shift function (H. SHIFT) with a new horizontal oscillation frequency dependent phase shift function (S. GAIN) implemented internally in the IC.

Control pins for various other internal functions support control at 0 to 2.5V dc, making it possible to simply control horizontal oscillation frequency and horizontal and vertical image phase directly with a microcomputer. When used in conjunction with an interface such as a DAC, it will also support system bus applications.

#### Features

- Supports multisynch displays
- DC control
- Low noise
- Supports polar input signals
- TTL output

#### Functions

- Horizontal frequency independent screen phase shift (H. SHIFT)
- Horizontal frequency dependent screen phase shift (S. GAIN)
- Vertical screen phase shift (V. SHIFT)
- Horizontal oscillation frequency control (H. OSC)
- Horizontal synchronization and detection (H. LOCK)
- Vertical blanking output (V. BLK)

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.


**SANYO Electric Co.,Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN


## Package Dimensions

unit: mm

### 3061-DIP30S

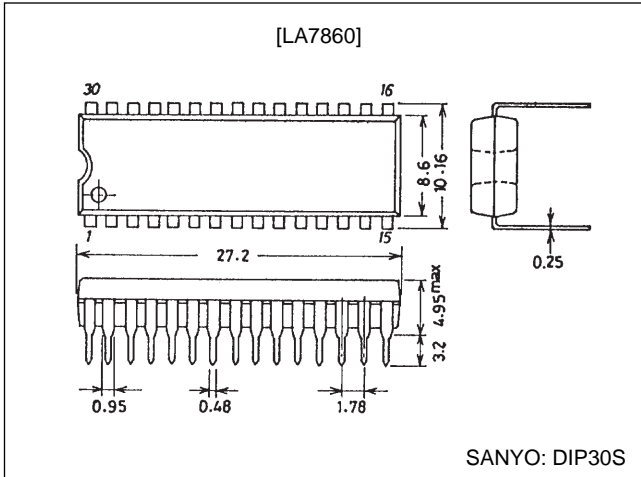

### 3073A-MFP30SD

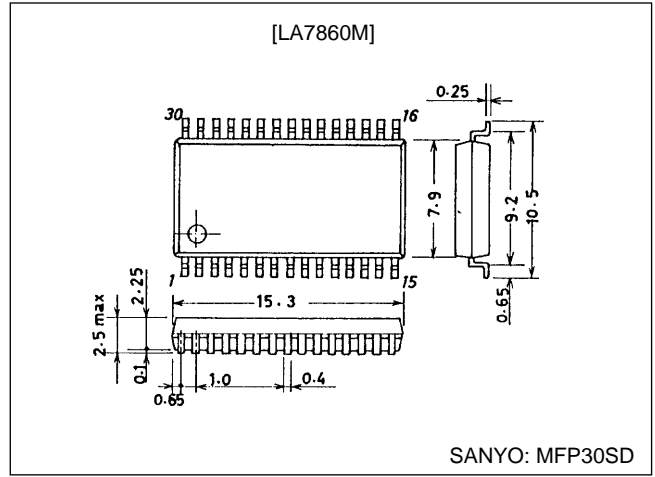

## Specifications

### Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{21 \text{ max}}$		14	V
Maximum supply current	$I_{14 \text{ max}}$		75	mA
Maximum rush current	$I_{16\text{Si} \text{ max}}$		10	mA
	$I_{24\text{Si} \text{ max}}$		10	mA
	$I_{25\text{Si} \text{ max}}$		2	mA
FBP minimum input voltage	$V_{IN18 \text{ min}}$		-5	V
Allowable power dissipation	$P_d \text{ max}$	[LA7860]	0.95	$\text{W}^{\#1}$
		$T_a \leq 70^\circ\text{C}$ [LA7860M]	1.1	$\text{W}^{\#2}$
Operating temperature	$T_{opr}$		-10 to +70	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-55 to +150	$^\circ\text{C}$

Note: 1.  $TC \leq 100^\circ\text{C}$ ,  $P_d \text{ max} = 0.95 \text{ W}$  (The case temperature is the temperature of pin 23).  
 2. Measured when mounted on a  $100 \times 70 \times 1.15 \text{ mm}$  glass epoxy printed circuit board.

### Recommended Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	unit
Recommended supply voltage	$V_{21}$		12	V
Recommended supply current	$I_{14}$		60	mA
Operating supply voltage	$V_{21op}$		10.5 to 13.5	V
Operating supply current	$I_{14op}$		55 to 65	mA
Recommended input voltage	$V_1$		2	$\text{V}_{p-p}$
	$V_{30}$		2	$\text{V}_{p-p}$
	$V_{1op}$		1.0 to 3.0	$\text{V}_{p-p}$
	$V_{30op}$		1.0 to 3.0	$\text{V}_{p-p}$
Maximum horizontal input width	$V_{IN1 \text{ max}}$		3/20	Th
Maximum vertical input width	$V_{IN30 \text{ max}}$		3	ms
Maximum FBP input width	$V_{IN18 \text{ max}}$		$1/5 + T_{delf}$	Th

Where Th is one horizontal cycle, and Tdelf is 20-pin operation period.

LA7860, 7860M

Operating Characteristics at  $T_a = 25\text{ }^\circ\text{C}$ ,  $V_{CC21} = 12\text{ V}$ ,  $I_{CC14} = 60\text{ mA}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
$V_{CC21}$ current dissipation	$I_{21}$		4.2	5.6	7.0	mA
$V_{CC14}$ supply voltage	$V_{14}$		8.5	9.0	9.5	V
Maximum vertical pull-in frequency	$F_v \text{ max}$		180	210	240	Hz
Minimum vertical pull-in frequency	$F_v \text{ min}$		30.0	37.5	45.0	Hz
Maximum vertical blanking width	$W_b \text{ max}$		740	875	1010	$\mu\text{s}$
Minimum vertical blanking width	$W_b \text{ min}$		340	400	460	$\mu\text{s}$
Blanking pulse output high voltage	$V_{bh}$		4.5	5	5.5	V
Blanking pulse output low voltage	$V_{bl}$				0.3	V
Vertical blanking output current	$I_{25\text{so}}$		1.6	2		mA
Vertical output pulse width	$W_{vd}$		255	300	345	$\mu\text{s}$
Vertical output maximum shift	$P_v \text{ max}$		400	475	550	$\mu\text{s}$
Vertical output delay	$D_v \text{ min}$				1	$\mu\text{s}$
Vertical output voltage high	$V_{dvh}$		4.5	5.0	5.5	V
Vertical output voltage low	$V_{dvl}$				0.3	V
Vertical output current	$I_{24\text{so}}$		1.7	2.2		mA
Vertical oscillation start voltage	$F_{vst}$			5.0	6.0	V
Horizontal oscillation start voltage	$F_{Hst}$			5.0	6.0	V
Minimum horizontal oscillation frequency	$F_H \text{ min}$		25.7	27.1	28.5	kHz
Maximum horizontal oscillation frequency	$F_H \text{ max}$		89.5	94.6	99.7	kHz
Horizontal frequency pull-in range	$H_{pull}$		3.5	4.1		%
AFC control current	$I_{afc}$		500	630	760	$\mu\text{A}$
Horizontal output high voltage	$V_{hdh}$		4.5	5.0	5.5	V
Horizontal output low voltage	$V_{hdl}$				0.3	V
Minimum horizontal phase	$Ph \text{ min}$	$T_{fbp} = 2.6\text{ }\mu\text{s}$	-2.0	-1.4	-0.8	$\mu\text{s}$
Maximum horizontal phase	$Ph \text{ max}$	$T_{fbp} = 2.6\text{ }\mu\text{s}$	3.5	4.5	5.5	$\mu\text{s}$
Frequency dependent maximum phase	$Pf \text{ max}$	$T_{fbp} = 2.6\text{ }\mu\text{s}$	23	26.5	30	%
Frequency dependent minimum phase	$Pf \text{ min}$	$T_{fbp} = 2.6\text{ }\mu\text{s}$	-3	0	3	%
Minimum horizontal output pulse width	$W_h \text{ min}$		21	24	27	%
Maximum horizontal output pulse width	$W_h \text{ max}$		64	67	70	%
Horizontal output current	$I_{16\text{so}}$		1.7	2.3		mA
Synchronized output voltage	$V_{co}$		4.5	5	5.5	V
Asynchronized output voltage	$V_{nco}$				0.3	V
FBP input voltage	$V_{fbp}$		1.2	1.5	1.8	V
EN input voltage	$V_{en}$		2.0	2.5	3.0	V



- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of September, 1998. Specifications and information herein are subject to change without notice.