





**Features**

- Low Profile: Typical height of 1.4mm
- Ideal for automated placement
- High surge current capability
- Solder Dip 260 , 10seconds



**Mechanical Data**

- Case:SOPA-4
- Epoxy meets UL-94V-0 Flammability rating
- Terminals:Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D
- Polarity:As markde on body

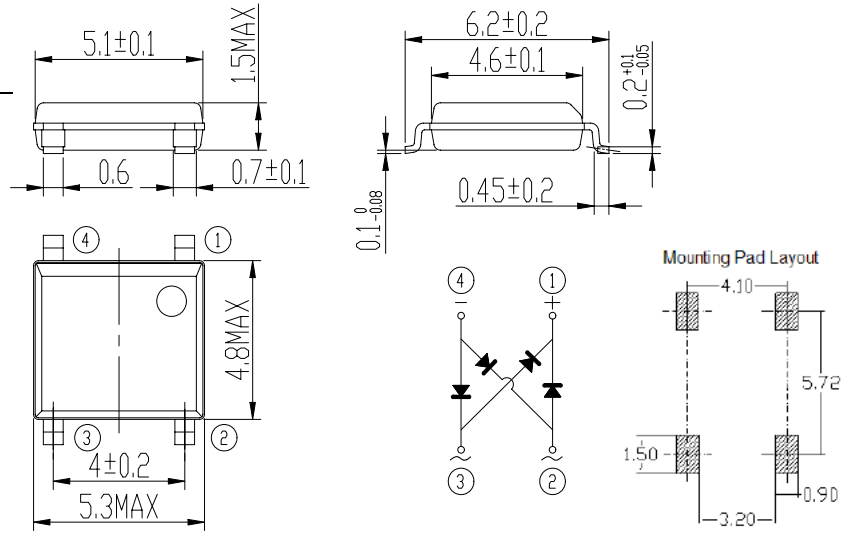

**Maximum Ratings & Electrical Characteristics** Ratings at 25

ambient temperature unless otherwise specified.






| Parameter   | Symbol                             | LB2SB | LB4SB | LB6SB | LB8SB | LB10SB      | Unit               |
|---|------------------------------------|-------|-------|-------|-------|-------------|--------------------|
| Maximum repetitive peak reverse voltage   | $V_{RRM}$                          | 200   | 400   | 600   | 800   | 1000        | V                  |
| Maximum RMS voltage   | $V_{RMS}$                          | 140   | 280   | 420   | 560   | 700         | V                  |
| Maximum DC blocking voltage   | $V_{DC}$                           | 200   | 400   | 600   | 800   | 1000        | V                  |
| Maximum Average forward output rectified current<br>on glass-epoxy P.C.B<br>on aluminum substrate | $I_{F(AV)}$                        |       |       |       |       | 0.8<br>1.0  | A                  |
| Peak forward surge current 8.3 ms single sine-wave<br>superimposed on rated load (JEDEC Method)   | $I_{FSM}$                          |       |       |       |       | 40          | A                  |
| Rating for fusig ( $t < 8.3ms$ )  | $i^2t$                             |       |       |       |       | 6.5         | A <sup>2</sup> sec |
| Maximum instantaneous forward voltage drop<br>per diode at 1.0A                                   | $V_F$                              |       |       |       |       | 1.00        | V                  |
| Maximum DC reverse current at $T_A=25$<br>rated DC blocking voltage per leg $T_A=125$             | $I_R$                              |       |       |       |       | 5<br>500    | $\mu A$            |
| Typical thermal resistance per leg (Note 1)   | $R_{\theta JA}$<br>$R_{\theta JL}$ |       |       |       |       | 80<br>25    | /W                 |
| Operating junction temperature range  | $T_J$                              |       |       |       |       | -55 to +150 |                    |
| Storage temperature range   | $T_{STG}$                          |       |       |       |       | -55 to +150 |                    |

- Notes:** 1. Device mounted P.C.B with 0.47x0.47"(12mmx12mm) Copper Pads.  
2. JEDEC registered values




**RATINGS AND CHARACTERISTIC CURVES**

(TA=25 unless otherwise noted)

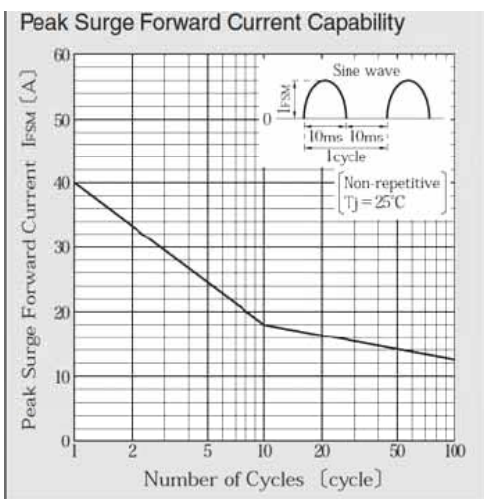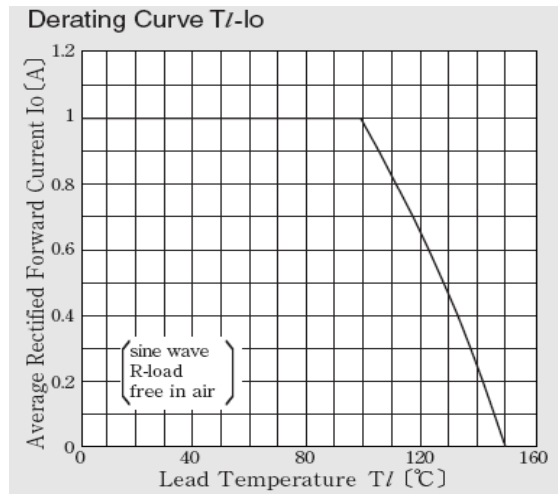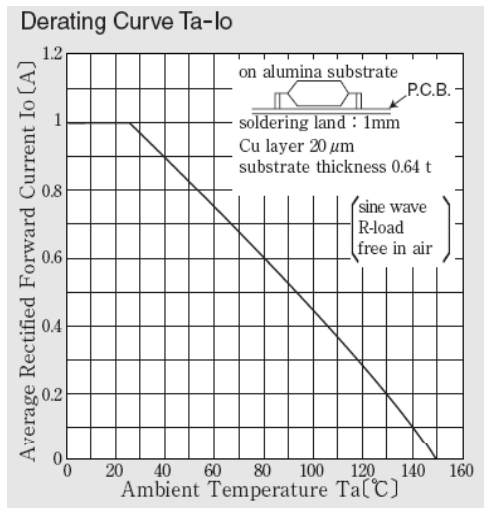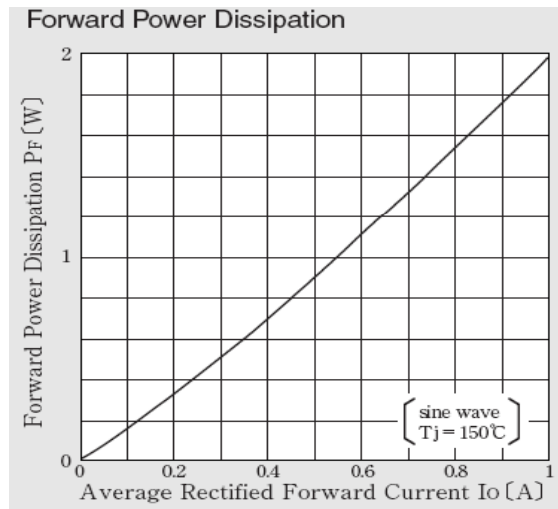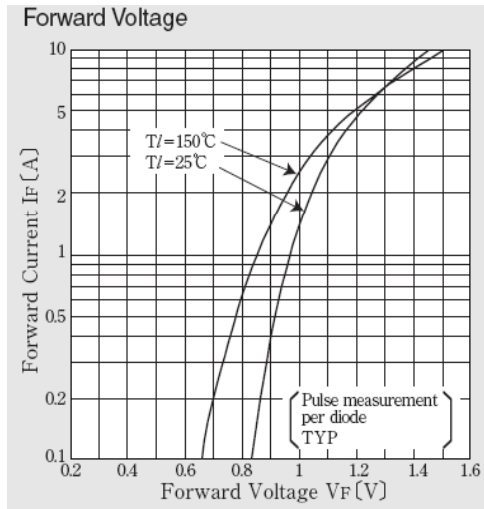

Marking

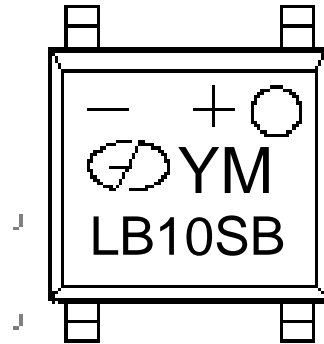

DATE CODE

|       |      |      |      |      |      |      |      |      |      |      |      |      |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| Year  | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 | 2017 | 2018 | 2019 | 2020 |
| Code  | 9    | A    | B    | C    | D    | E    | F    | G    | H    | J    | K    | 0    |
| Month | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   |
| Code  | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | O    | N    | D    |