


### Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	171.92	172	172.08
Insertion Loss	dB	-	25	27
1 dB Bandwidth	MHz		5.78	-
3 dB Bandwidth	MHz	6	6.02	-
18dB Bandwidth	MHz	-	6	6.6
40 dB Bandwidth	MHz	-	6.85	7
50 dB Bandwidth	MHz	-	7.1	7.4
Passband Variation	dB	-	0.9	1.5
Absolute Delay	usec	-	3.342	-
Group Delay Variation( $f_0 \pm 2.8\text{MHz}$ )	nsec	-	100	200
Ultimate Rejection	dB	45	48	-
Material Temperature coefficient	KHz/°C	-3.096		
Ambient Temperature	°C	25		
Package Size	DIP2712 (27.0x12.8x4.7mm3)			

#### Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show


### Matching Configuration

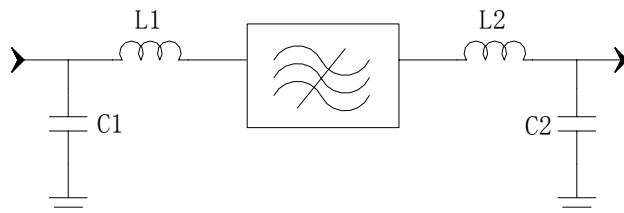


**L1=68nH L2=56nH**  
**C1=39pF C2=36pF**  
**Source/Load Impedance=50 ohm**

Notes - Component values may change depending on board layout.

www.DataSheet4U.com

	<b>SIPAT Co., Ltd.</b> ( CETC No. 26 Research Institute ) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBT17203	
		Rev. Date	2005-9-23	
		Rev.	1.0	Page

*Package Dimension*

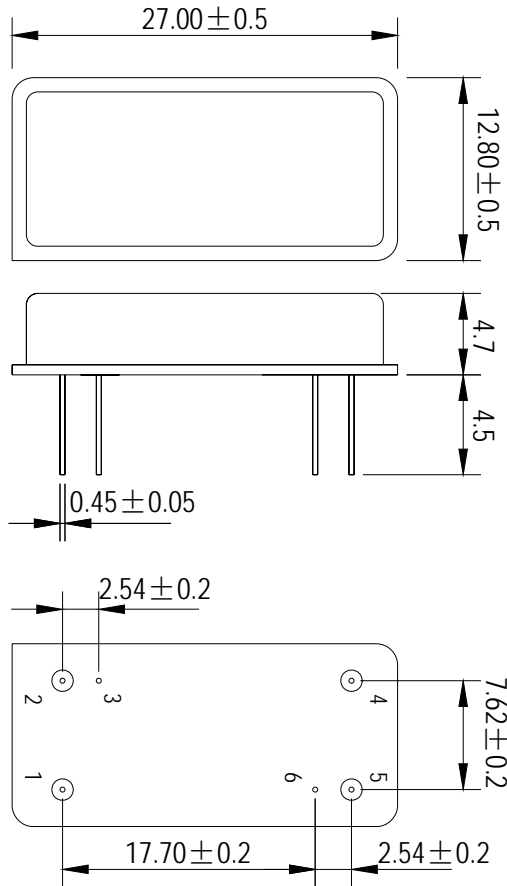

**Input:1**  
**Output:5**


[www.DataSheet4U.com](http://www.DataSheet4U.com)



**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanping Huayuan Road No. 14  
Chongqing, China, 400060

Part Number	LBT17203	
Rev. Date	2005-9-23	
Rev.	1.0	Page 2/3

*Typical Performance*

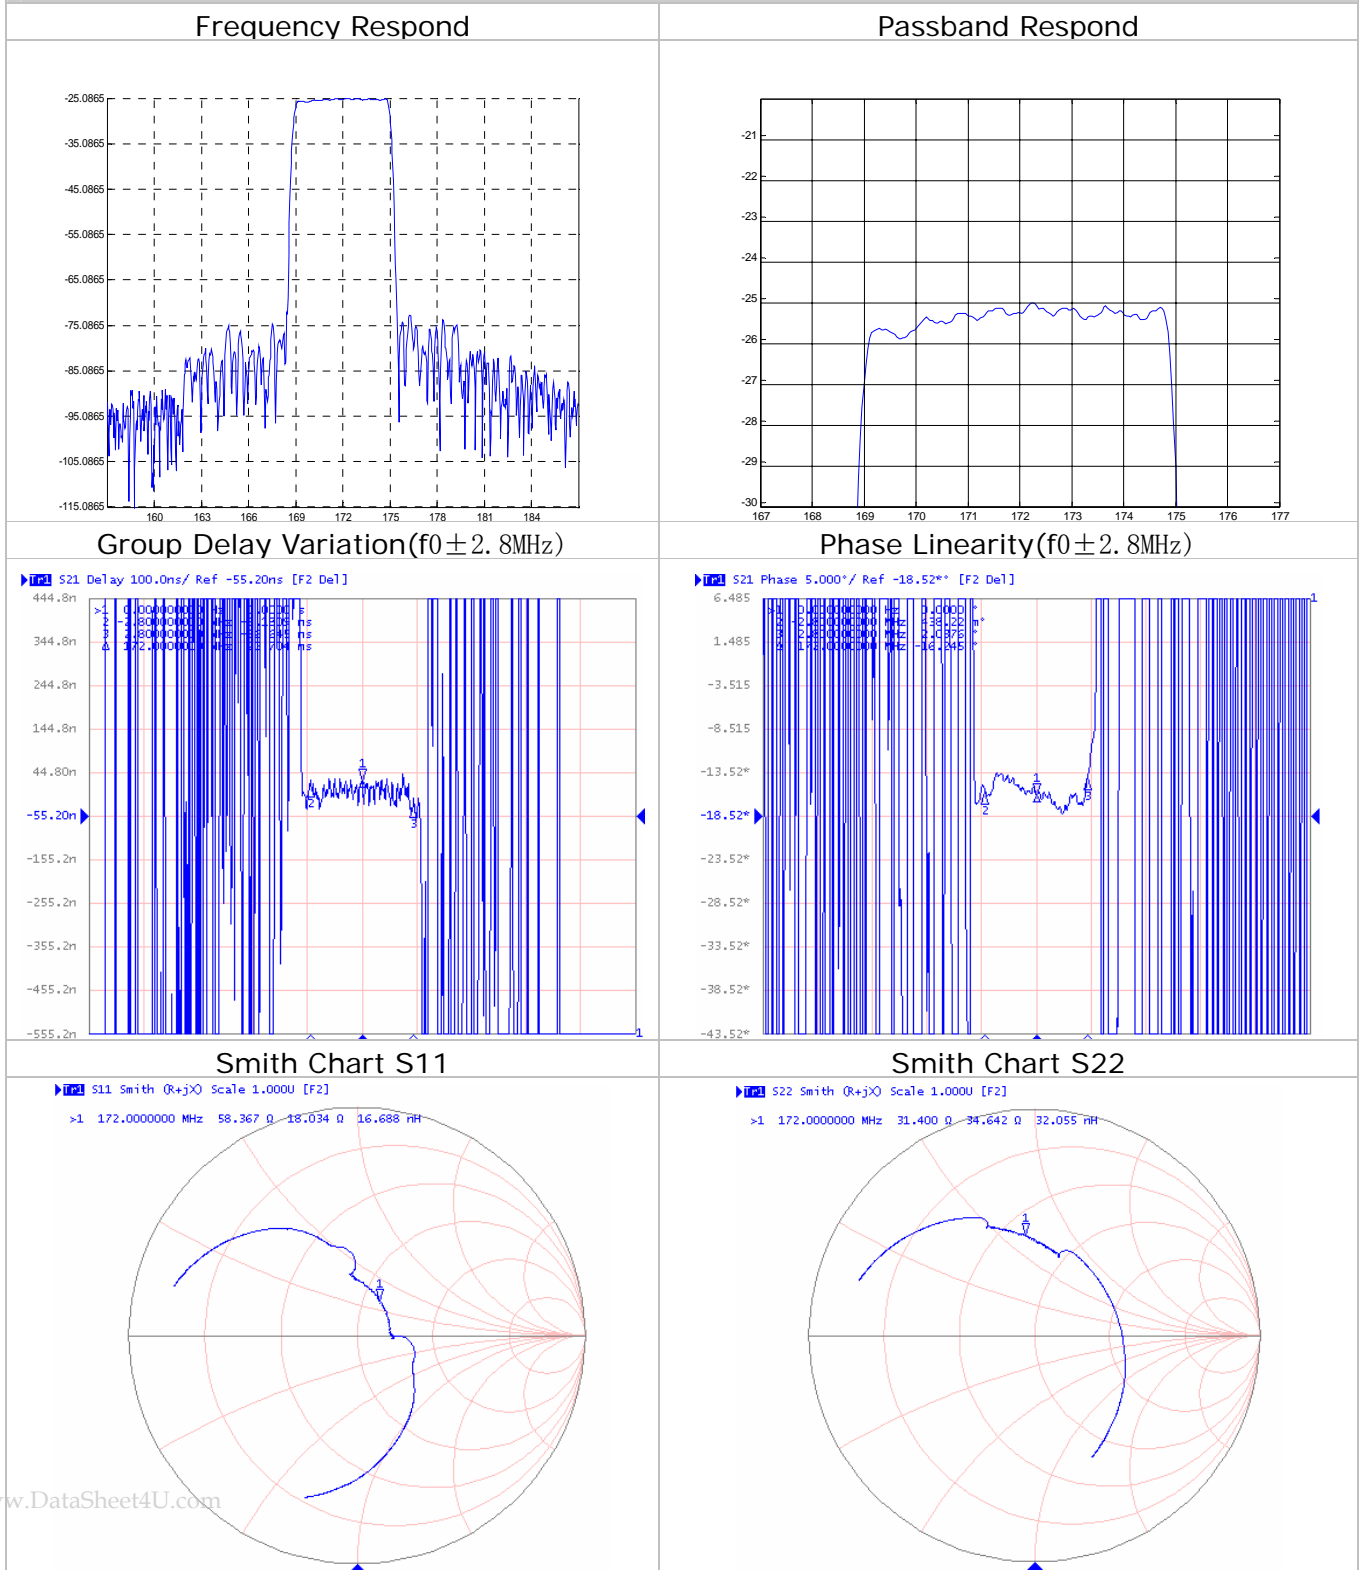

www.DataSheet4U.com



**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanping Huayuan Road No. 14  
Chongqing, China, 400060

Part Number	LBT17203	
Rev. Date	2005-9-23	
Rev.	1.0	Page 3/3