



|                     | LCA120 | Units |
|---------------------|--------|-------|
| Load Voltage        | 250    | V     |
| Load Current        | 170    | mA    |
| Max R <sub>ON</sub> | 20     | Ω     |

### Features

- Small 6 Pin DIP Package
- Low Drive Power Requirements (TTL/CMOS Compatible)
- No Moving Parts
- High Reliability
- Arc-Free With No Snubbing Circuits
- 3750V<sub>RMS</sub> Input/Output Isolation
- FCC Compatible
- VDE Compatible
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable
- Surface Mount and Tape & Reel Versions Available

### Applications

- Telecommunications
  - Telecom Switching
  - Tip/Ring Circuits
  - Modem Switching (Laptop, Notebook, Pocket Size)
- Hookswitch
- Dial Pulsing
- Ground Start
- Ringer Injection
- Instrumentation
  - Multiplexers
  - Data Acquisition
  - Electronic Switching
  - I/O Subsystems
  - Meters (Watt-Hour, Water, Gas)
- Medical Equipment-Patient/Equipment Isolation
- Security
- Aerospace
- Industrial Controls

### Description

LCA120 is a 250V, 170mA, 20Ω 1-Form-A relay. It features enhanced peak load current capability. Current limiting version is available. ("L" suffix)

### Approvals

- UL Recognized: File Number E76270
- CSA Certified: File Number LR 43639-10
- BSI Certified to:
  - BS EN 60950:1992 (BS7002:1992) Certificate #: 7344
  - BS EN 41003:1993 Certificate #: 7344


### Ordering Information

| Part #    | Description                     |
|-----------|---------------------------------|
| LBA120    | 6 Pin DIP (50/Tube)             |
| LBA120LS  | 6 Pin Surface Mount (50/Tube)   |
| LBA120STR | 6 Pin Surface Mount (1000/Reel) |

### Pin Configuration


#### LCA120 Pinout

AC/DC Configuration

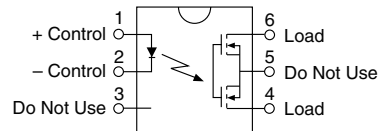


#### LCA120 Pinout

DC Only Configuration

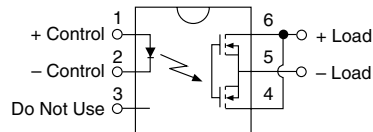

### Switching Characteristics of Normally Open (Form A) Devices



**Absolute Maximum Ratings (@ 25° C)**

| Parameter                                  | Min  | Typ | Max              | Units            |
|--|------|-----|------------------|------------------|
| Input Power Dissipation                    | -    | -   | 150 <sup>1</sup> | mW               |
| Input Control Current                      | -    | -   | 50               | mA               |
| Peak (10ms)                                | -    | -   | 1                | A                |
| Reverse Input Voltage                      | -    | -   | 5                | V                |
| Total Power Dissipation                    | -    | -   | 800 <sup>2</sup> | mW               |
| Isolation Voltage<br>Input to Output       | 3750 | -   | -                | V <sub>RMS</sub> |
| Operational Temperature                    | -40  | -   | +85              | °C               |
| Storage Temperature                        | -40  | -   | +125             | °C               |
| Soldering Temperature                      | -    | -   | -                | -                |
| DIP Package                                | -    | -   | +260             | °C               |
| Surface Mount Package<br>(10 Seconds Max.) | -    | -   | +220             | °C               |

<sup>1</sup> Derate Linearly 1.33 mw/°C













<sup>2</sup> Derate Linearly 6.67 mw/°C

*Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this data sheet is not implied. Exposure of the device to the absolute maximum ratings for an extended period may degrade the device and effect its reliability.*

**Electrical Characteristics**

| Parameter                            | Conditions                               | Symbol            | Min  | Typ | Max | Units            |
|--------------------------------------|--|-------------------|------|-----|-----|------------------|
| <b>Output Characteristics @ 25°C</b> |  |                   |      |     |     |                  |
| Load Voltage (Peak)                  | -  | V <sub>L</sub>    | -    | -   | 250 | V                |
| Load Current (Continuous)            | -  | I <sub>L</sub>    | -    | -   | 150 | mA               |
| AC/DC Configuration                  | -  | I <sub>L</sub>    | -    | -   | 200 | mA               |
| DC Configuration                     | -  | I <sub>L</sub>    | -    | -   | 200 | mA               |
| Peak Load Current                    | 10ms                                     | I <sub>LPK</sub>  | -    | -   | -   | mA               |
| On-Resistance                        | -  | R <sub>ON</sub>   | -    | -   | -   | Ω                |
| AC/DC Configuration                  | I <sub>L</sub> =Load Current             | R <sub>ON</sub>   | -    | 15  | 20  | Ω                |
| DC Configuration                     | I <sub>L</sub> =Load Current             | R <sub>ON</sub>   | -    | 5   | 6   | Ω                |
| Off-State Leakage Current            | V <sub>L</sub> =250V                     | I <sub>LEAK</sub> | -    | -   | 1   | μA               |
| Switching Speeds                     | -  | -                 | -    | -   | -   | -                |
| Turn-On                              | I <sub>F</sub> =5mA, V <sub>L</sub> =10V | T <sub>ON</sub>   | -    | -   | 3   | ms               |
| Turn-Off                             | I <sub>F</sub> =5mA, V <sub>L</sub> =10V | T <sub>OFF</sub>  | -    | -   | 3   | ms               |
| Output Capacitance                   | 50V; f=1MHz                              | C <sub>OUT</sub>  | -    | 50  | -   | pF               |
| <b>Input Characteristics @ 25°C</b>  |  |                   |      |     |     |                  |
| Input Control Current                | I <sub>L</sub> =Load Current             | I <sub>F</sub>    | 5    | -   | 50  | mA               |
| Input Dropout Current                | -  | I <sub>F</sub>    | 0.4  | 0.7 | -   | mA               |
| Input Voltage Drop                   | I <sub>F</sub> =5mA                      | V <sub>F</sub>    | 0.9  | 1.2 | 1.4 | V                |
| Reverse Input Voltage                | -  | V <sub>R</sub>    | -    | -   | 5   | V                |
| Reverse Input Current                | V <sub>R</sub> =5V                       | I <sub>R</sub>    | -    | -   | 10  | μA               |
| Input to Output Capacitance          | -  | C <sub>I/O</sub>  | -    | 3   | -   | pF               |
| Input to Output Isolation            | -  | V <sub>I/O</sub>  | 3750 | -   | -   | V <sub>RMS</sub> |

PERFORMANCE DATA\*

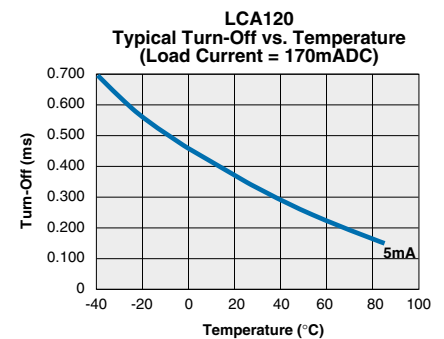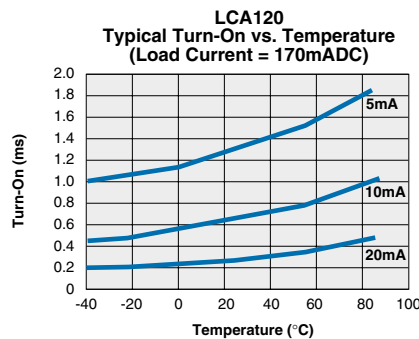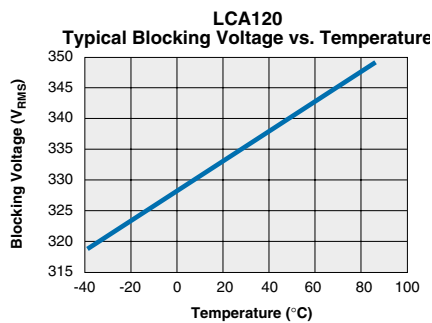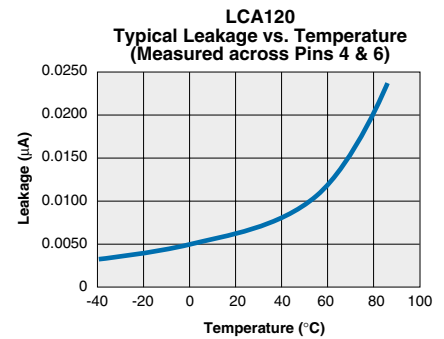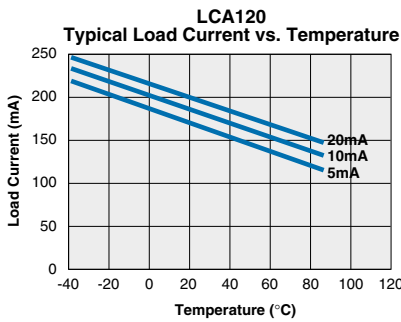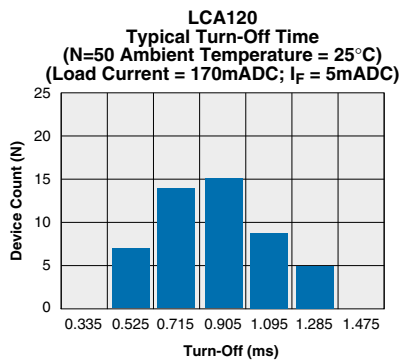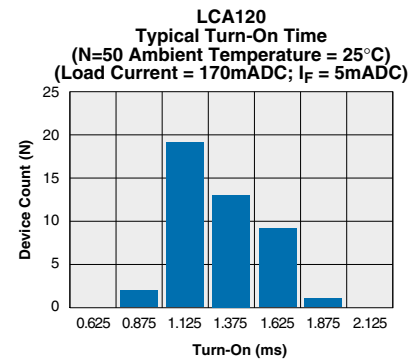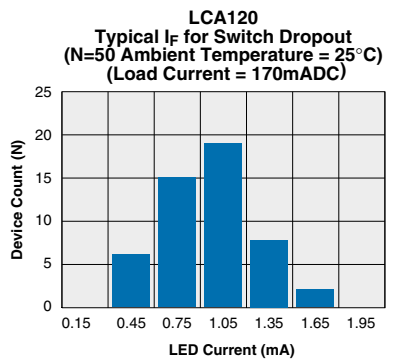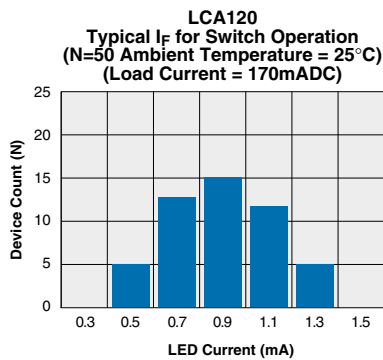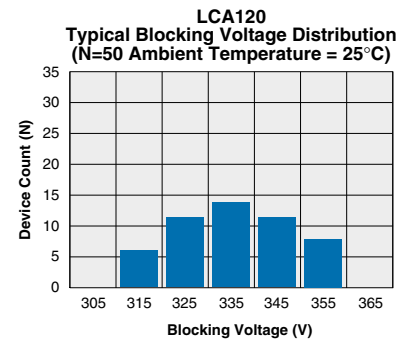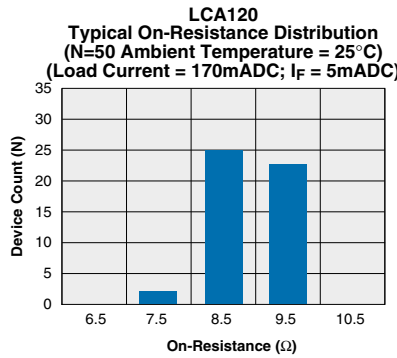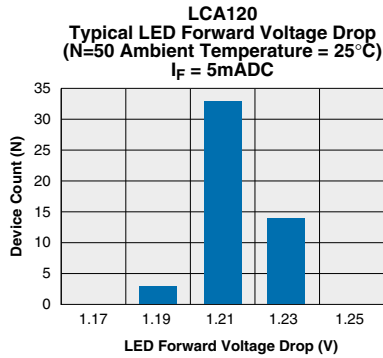


\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.




PERFORMANCE DATA\*


LCA120  
Typical LED Forward Voltage Drop vs. Temperature

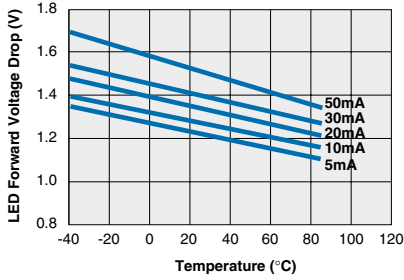


LCA120  
Typical Turn-On vs. LED Forward Current (Load Current = 170mADC)

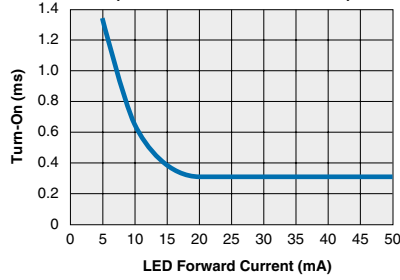


LCA120  
Typical Turn-Off vs. LED Forward Current (Load Current = 170mADC)

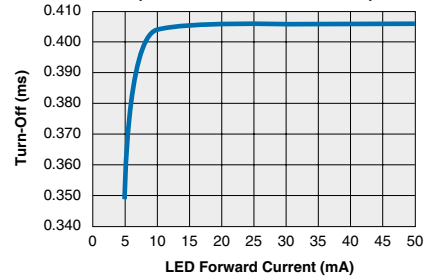


LCA120  
Typical On-Resistance vs. Temperature (Load Current = 170mADC; I<sub>F</sub> = 5mADC)

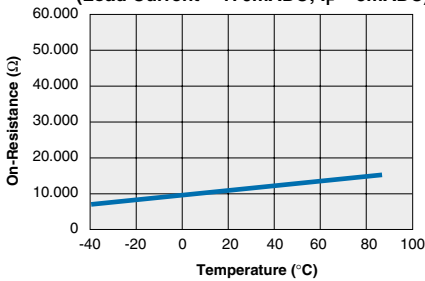


LCA120  
Typical I<sub>F</sub> for Switch Operation vs. Temperature (Load Current = 170mADC)

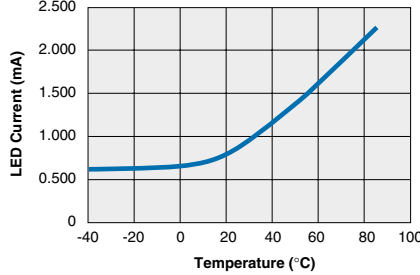


LCA120  
Typical I<sub>F</sub> for Switch Dropout vs. Temperature (Load Current = 170mADC)

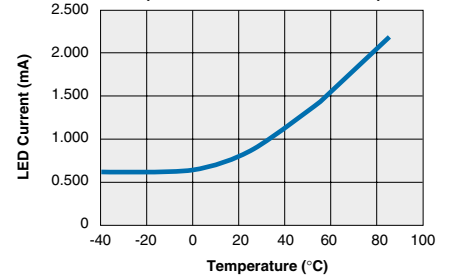






LCA120  
Typical Load Current vs. Load Voltage (Ambient Temperature = 25°C)  
I<sub>F</sub> = 5mADC

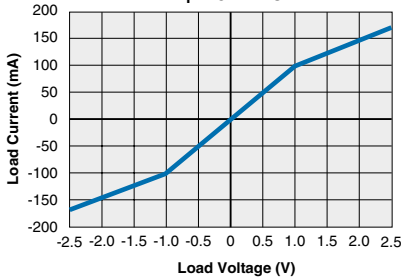

LCA120  
Energy Rating Curve

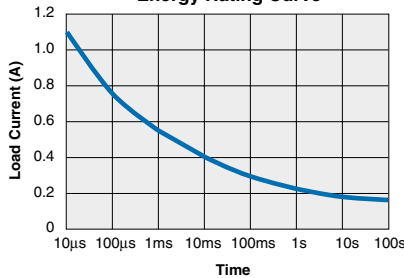

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

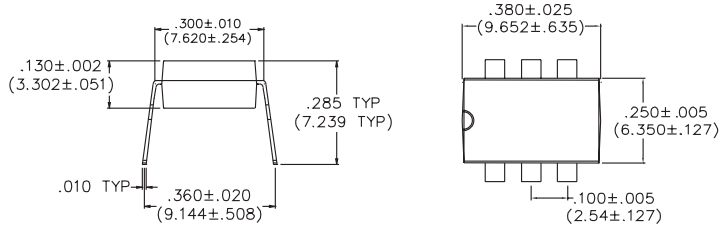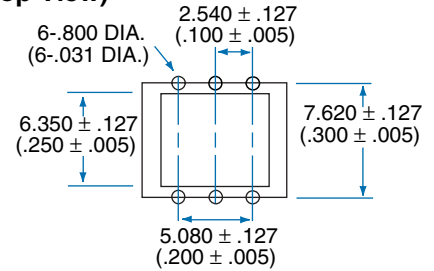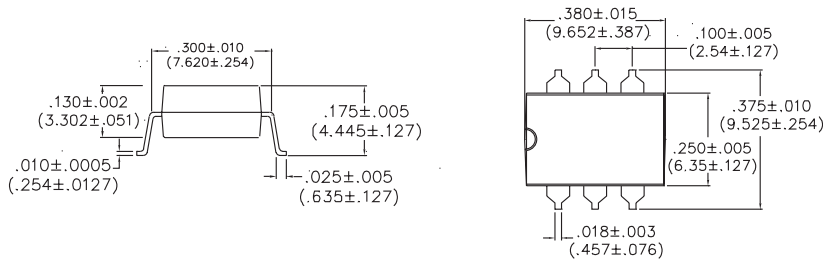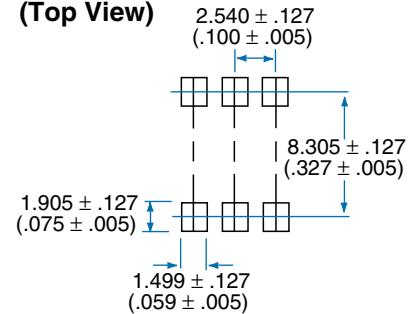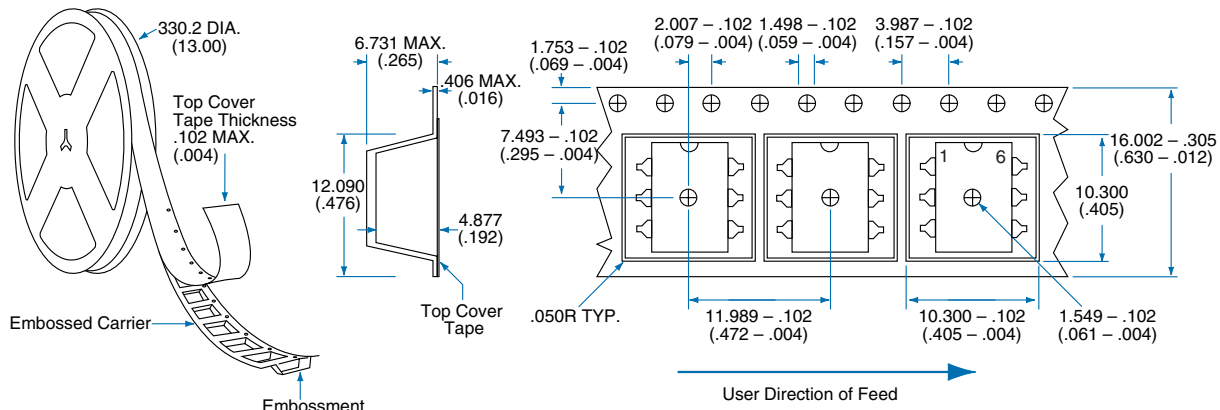**MECHANICAL DIMENSIONS**
**6 Pin Power DIP Through Hole (Standard)**

**PC Board Pattern (Top View)**

**6 Pin Power DIP Surface Mount ("S" Suffix)**

**PC Board Pattern (Top View)**

**Tape and Reel Packaging for 6 Pin Power DIP Surface Mount Package**


Dimensions  
 mm  
 (inches)



### CLARE LOCATIONS

Clare Headquarters  
78 Cherry Hill Drive  
Beverly, MA 01915  
Tel: 1-978-524-6700  
Fax: 1-978-524-4900  
Toll Free: 1-800-27-CLARE

Clare Switch Division  
4315 N. Earth City Expressway  
Earth City, MO 63045  
Tel: 1-314-770-1832  
Fax: 1-314-770-1812

Clare Micronix Division  
145 Columbia  
Aliso Viejo, CA 92656-1490  
Tel: 1-949-831-4622  
Fax: 1-949-831-4628

### SALES OFFICES

#### AMERICAS

##### Americas Headquarters

Clare  
78 Cherry Hill Drive  
Beverly, MA 01915  
Tel: 1-978-524-6700  
Fax: 1-978-524-4900  
Toll Free: 1-800-27-CLARE

##### Eastern Region

Clare  
603 Apache Court  
Mahwah, NJ 07430  
Tel: 1-201-236-0101  
Fax: 1-201-236-8685  
Toll Free: 1-800-27-CLARE

##### Central Region

Clare Canada Ltd.  
3425 Harvester Road, Suite 202  
Burlington, Ontario L7N 3N1  
Tel: 1-905-333-9066  
Fax: 1-905-333-1824

##### Western Region

Clare  
1852 West 11th Street, #348  
Tracy, CA 95376  
Tel: 1-209-832-4367  
Fax: 1-209-832-4732  
Toll Free: 1-800-27-CLARE

##### Canada

Clare Canada Ltd.  
3425 Harvester Road, Suite 202  
Burlington, Ontario L7N 3N1  
Tel: 1-905-333-9066  
Fax: 1-905-333-1824

### EUROPE

#### European Headquarters

CP Clare nv  
Bampsiaan 17  
B-3500 Hasselt (Belgium)  
Tel: 32-11-300868  
Fax: 32-11-300890

#### France

Clare France Sales  
Lead Rep  
99 route de Versailles  
91160 Champlan  
France  
Tel: 33 1 69 79 93 50  
Fax: 33 1 69 79 93 59

#### Germany

Clare Germany Sales  
ActiveComp Electronic GmbH  
Mitterstrasse 12  
85077 Manching  
Germany  
Tel: 49 8459 3214 10  
Fax: 49 8459 3214 29

#### Italy

C.L.A.R.E.s.a.s.  
Via C. Colombo 10/A  
I-20066 Melzo (Milano)  
Tel: 39-02-95737160  
Fax: 39-02-95738829

#### Sweden

Clare Sales  
Comptronic AB  
Box 167  
S-16329 Spånga  
Tel: 46-862-10370  
Fax: 46-862-10371

#### United Kingdom

Clare UK Sales  
Marco Polo House  
Cook Way  
Bindon Road  
Taunton  
UK-Somerset TA2 6BG  
Tel: 44-1-823 352541  
Fax: 44-1-823 352797

### ASIA/PACIFIC

#### Asian Headquarters

Clare  
Room N1016, Chia-Hsin, Bldg II,  
10F, No. 96, Sec. 2  
Chung Shan North Road  
Taipei, Taiwan R.O.C.  
Tel: 886-2-2523-6368  
Fax: 886-2-2523-6369

<http://www.clare.com>

---

*Clare, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in Clare's Standard Terms and Conditions of Sale, Clare, Inc. assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.*

*The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of Clare's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. Clare, Inc. reserves the right to discontinue or make changes to its products at any time without notice.*

---

Specification: DS-LCA120-R8  
©Copyright 2001, Clare, Inc.  
OptoMOS® is a registered trademark of Clare, Inc.  
All rights reserved. Printed in USA.  
7/17/01