



LD1117/A-K

LINEAR INTEGRATED CIRCUIT


LOW DROP FIXED AND ADJUSTABLE POSITIVE VOLTAGE REGULATORS

DESCRIPTION

The UTC **LD1117/A-K** is a low dropout, 3-terminal positive voltage regulator designed to provide output current up to 800mA/1A, There are adjustable version ($V_{REF}=1.25V$) and various fixed versions.

FEATURES

- * Low dropout voltage
- * Output current up to 0.8A for **LD1117-K** and 1.0A for **LD1117A-K**
- * Built-in current limit and over temperature protection
- * Low current consumption
- * No short-circuit protection
- * Support MLCC

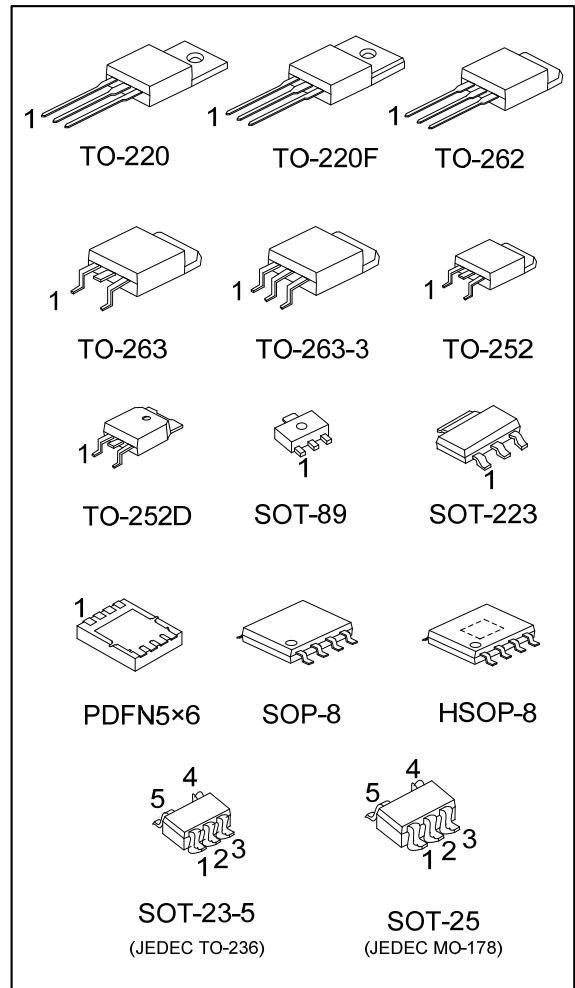

ORDERING INFORMATION

| Ordering Number | | Package | ② Pin Assignment | | | | ③ Packing | | | | | | | | | | | | | | | |
|-----------------------|-----------------------|----------|---|---|---|-----------|--------------|---|---|---|---|---|---|---|---|---|---|---|---|-------------------------|--|--|
| Lead Free | Halogen Free | | Pin Code | 1 | 2 | 3 | | | | | | | | | | | | | | | | |
| LD1117①L-xx-AA3-②-③ | LD1117①G-xx-AA3-②-③ | SOT-223 | <table border="1"> <tr><td>A</td><td>G</td><td>O</td><td>I</td></tr> <tr><td>B</td><td>O</td><td>G</td><td>I</td></tr> <tr><td>C</td><td>G</td><td>I</td><td>O</td></tr> <tr><td>D</td><td>I</td><td>G</td><td>O</td></tr> </table> | A | G | O | I | B | O | G | I | C | G | I | O | D | I | G | O | R: Tape Reel T: Tube | | |
| A | G | O | | I | | | | | | | | | | | | | | | | | | |
| B | O | G | | I | | | | | | | | | | | | | | | | | | |
| C | G | I | | O | | | | | | | | | | | | | | | | | | |
| D | I | G | | O | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-AB3-②-③ | LD1117①G-xx-AB3-②-③ | SOT-89 | | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-TA3-②-③ | LD1117①G-xx-TA3-②-③ | TO-220 | | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-TF3-②-③ | LD1117①G-xx-TF3-②-③ | TO-220F | | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-TN3-②-③ | LD1117①G-xx-TN3-②-③ | TO-252 | | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-TND-②-③ | LD1117①G-xx-TND-②-③ | TO-252D | | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-T2Q-②-③ | LD1117①G-xx-T2Q-②-③ | TO-262 | | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-TQ2-②-③ | LD1117①G-xx-TQ2-②-③ | TO-263 | | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-TQ3-②-③ | LD1117①G-xx-TQ3-②-③ | TO-263-3 | | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-AE5-G-③ | LD1117①G-xx-AE5-G-③ | SOT-23-5 | GOINN | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-AF5-G-③ | LD1117①G-xx-AF5-G-③ | SOT-25 | GOINN | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-S08-③ | LD1117①G-xx-S08-③ | SOP-8 | GOOIxOOx | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-SH2-③ | LD1117①G-xx-SH2-③ | HSOP-8 | GOOIxOOx | | | | | | | | | | | | | | | | | | | |
| LD1117①L-xx-P5060-A-R | LD1117①G-xx-P5060-A-R | PDFN5×6 | GGGIOOOO | | | Tape Reel | | | | | | | | | | | | | | | | |








- Notes: 1. ① : Current code: Blank: 800mA A: 1A
 2. Pin Assignment: I: V_{IN} O: V_{OUT} G: GND/ADJ
 3. xx: Output Voltage, Refer to Marking Information.

| | |
|--|--|
| <p>LD1117①G-xx-AA3-②-③</p> <p>(1) Packing Type (2) Pin Assignment (3) Package Type (4) Output Voltage Code (5) Green Package (6) Current Code</p> | <p>(1) R: Tape Reel, T: Tube (2) refer to Pin Assignment (3) AA3: SOT-223, AB3: SOT-89, TA3: TO-220, TF3: TO-220F, TN3: TO-252, TND: TO-252D, T2Q: TO-262, TQ2: TO-263, TQ3: TO-263-3, AE5: SOT-23-5, AF5: SOT-25, S08: SOP-8, SH2: HSOP-8, P5060: PDFN5×6 (4) xx: refer to Marking Information (5) G: Halogen Free and Lead Free, L: Lead Free (6) Blank: 800mA, A: 1A</p> |
|--|--|

LD1117/A-K


LINEAR INTEGRATED CIRCUIT

MARKING INFORMATION
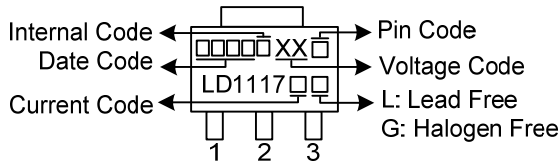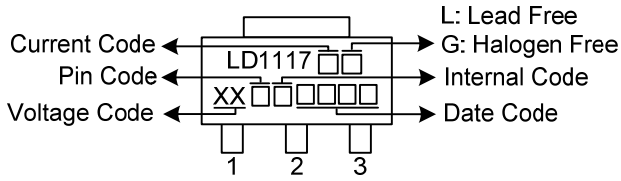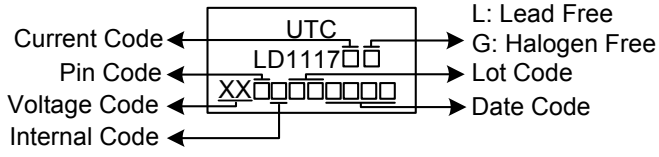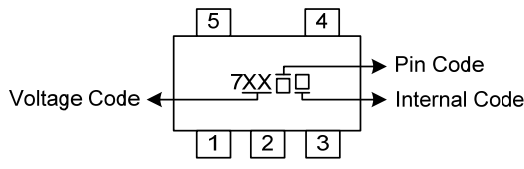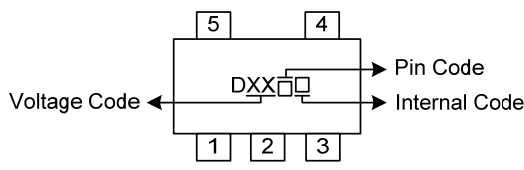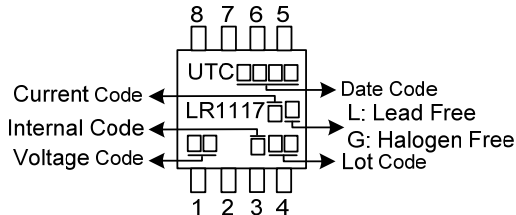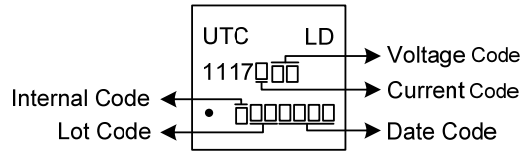
| PACKAGE | VOLTAGE CODE | MARKING |
|--|--|--|
| SOT-89 | |  |
| SOT-223 | |  |
| TO-220 TO-220F TO-252 TO-252D TO-262 TO-263 TO-263-3 | |  |
| SOT-23-5 SOT-25 (LD1117-K) | 12 :1.2V 15 :1.5V 18 :1.8V 25 :2.5V 2J :2.85V 30 :3.0V 33 :3.3V 36 :3.6V 50 :5.0V AD :ADJ |  |
| SOT-23-5 SOT-25 (LD1117A-K) | |  |
| SOP-8 HSOP-8 | |  |
| PDFN5x6 | |  |


Note: Current code: Blank: 0.8A A: 1A

■ PIN CONFIGURATION

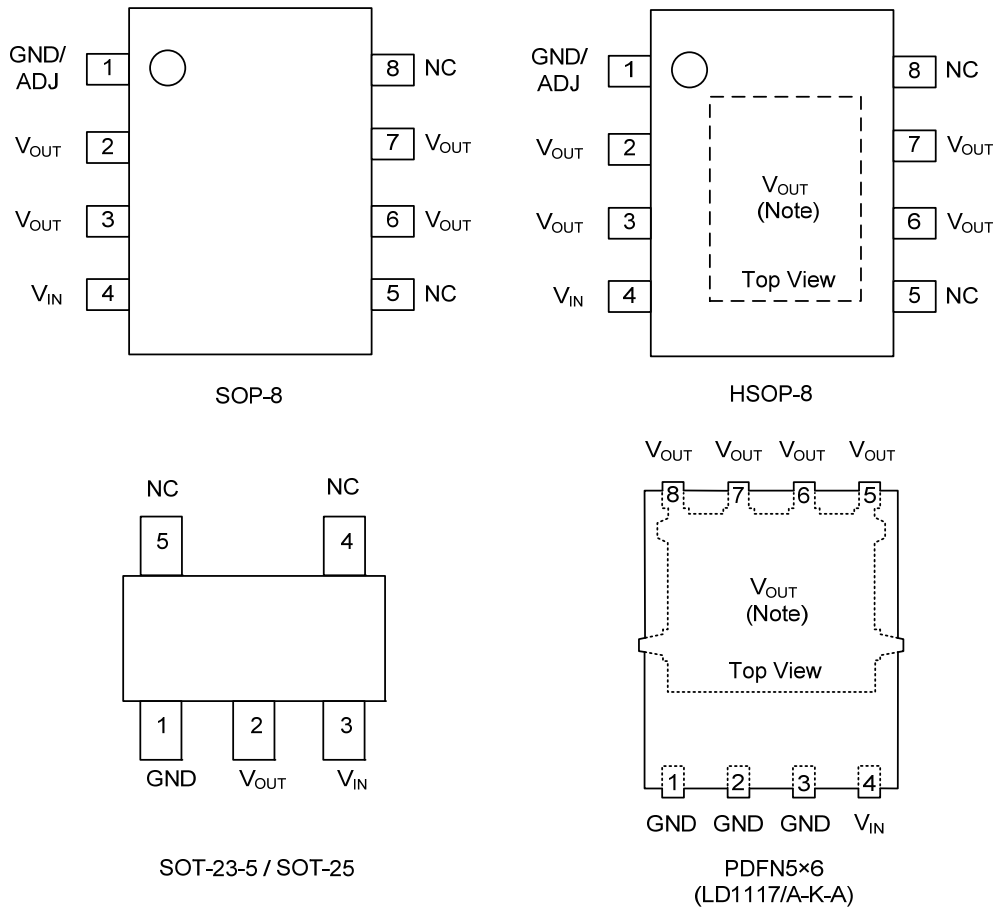

Note: Connect exposed pad to V_{OUT} .

■ BLOCK DIAGRAM

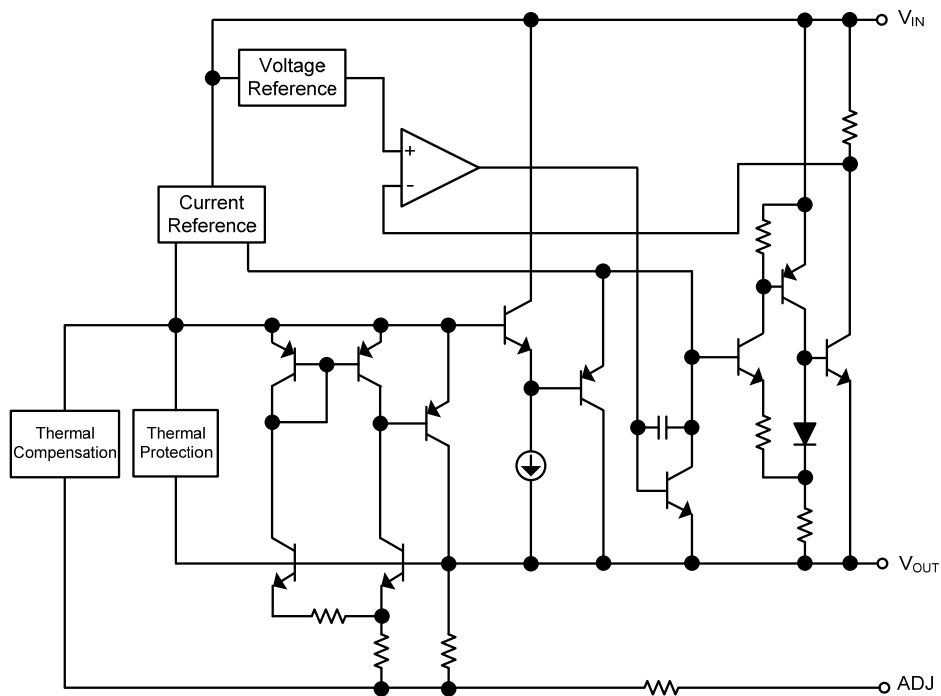

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|--------------------------------|-----------|--------------------|--------------------|
| DC Input Voltage | V_{IN} | 18 | V |
| Power Dissipation | P_D | Internally limited | |
| Junction Temperature | T_J | +125 | $^{\circ}\text{C}$ |
| Operating Temperature (Note 2) | T_{OPR} | -40 ~ +125 | $^{\circ}\text{C}$ |
| Storage temperature | T_{STG} | -40 ~ +125 | $^{\circ}\text{C}$ |

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. This condition is only determined from design. It can't be 100% tested in mass production.

■ RECOMMENDED OPERATING RATINGS

| PARAMETER | SYMBOL | RATINGS | UNIT |
|---------------|----------|---------|------|
| Input Voltage | V_{IN} | 15 | V |

■ THERMAL DATA

| PARAMETER | SYMBOL | RATINGS | UNIT | |
|---------------------|---------------|-----------------|------|-----------------------------|
| Junction to Ambient | θ_{JA} | SOT-223 | 165 | $^{\circ}\text{C}/\text{W}$ |
| | | SOT-89 | 180 | $^{\circ}\text{C}/\text{W}$ |
| | | SOT-23-5/SOT-25 | 280 | $^{\circ}\text{C}/\text{W}$ |
| | | SOP-8/HSOP-8 | 150 | $^{\circ}\text{C}/\text{W}$ |
| | | TO-252/TO-252D | 112 | $^{\circ}\text{C}/\text{W}$ |
| | | TO-220 | 54 | $^{\circ}\text{C}/\text{W}$ |
| | | TO-262/TO-263 | 64 | $^{\circ}\text{C}/\text{W}$ |
| | | PDFN5×6 | 38 | $^{\circ}\text{C}/\text{W}$ |
| Junction to Case | θ_{JC} | SOT-223 | 15 | $^{\circ}\text{C}/\text{W}$ |
| | | SOT-89 | 50 | $^{\circ}\text{C}/\text{W}$ |
| | | SOT-23-5/SOT-25 | 90 | $^{\circ}\text{C}/\text{W}$ |
| | | SOP-8/HSOP-8 | 20 | $^{\circ}\text{C}/\text{W}$ |
| | | TO-252/TO-252D | 12 | $^{\circ}\text{C}/\text{W}$ |
| | | TO-220/TO-262 | 4 | $^{\circ}\text{C}/\text{W}$ |
| | | TO-263 | 4 | $^{\circ}\text{C}/\text{W}$ |
| | | PDFN5×6 | 15.6 | $^{\circ}\text{C}/\text{W}$ |

■ ELECTRICAL CHARACTERISTICS

($T_A=25^\circ\text{C}$, refer to the test circuits, $C_O=10\mu\text{F}$ unless otherwise specified)

For LD1117/A-K-1.2

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|-----------|-------|-------|---------------|
| Output Voltage | V_{OUT} | $V_{IN}=3.2\text{V}$, $I_{OUT}=10\text{mA}$, $T_J=25^\circ\text{C}$ | 1.176 | 1.200 | 1.224 | V |
| Output Voltage | V_{OUT} | $V_{IN}=2.7$ to 8V LD1117-K : $I_{OUT}=10\sim 800\text{mA}$ LD1117A-K : $I_{OUT}=10\sim 1000\text{mA}$ | 1.176 | 1.200 | 1.224 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=2.7$ to 8V , $I_{OUT}=10\text{mA}$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=2.7\text{V}$ LD1117-K : $I_{OUT}=10\sim 800\text{mA}$ LD1117A-K : $I_{OUT}=10\sim 1000\text{mA}$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^\circ\text{C}$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100\text{mA}$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10\text{V}$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=6.2\text{V}$, $T_J=25^\circ\text{C}$ | LD1117-K | 800 | | mA |
| | | | LD1117A-K | 1000 | | |
| Minimum Load Current | $I_{O(MIN)}$ | $V_{IN}=15\text{V}$ | | 2 | 5 | mA |
| Output Noise Voltage | e_N | $B=10\text{Hz}$ to 10KHz , $T_J=25^\circ\text{C}$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40\text{mA}$, $f=120\text{Hz}$, $T_J=25^\circ\text{C}$, $V_{IN}=4.2\text{V}$, $V_{RIPPLE}=1\text{V}_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100\text{mA}$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500\text{mA}$ | | 1.15 | 1.25 | |
| | | $I_{OUT}=800\text{mA}$ | | 1.20 | 1.30 | |
| | | $I_{OUT}=1\text{A}$ | | 1.30 | 1.40 | |
| Thermal Regulation | | $T_A=25^\circ\text{C}$, 30ms Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-K-1.5

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------|------------------|---|-----------|-------|-------|---------------|
| Output Voltage | V_{OUT} | $V_{IN}=3.5\text{V}$, $I_{OUT}=10\text{mA}$, $T_J=25^\circ\text{C}$ | 1.470 | 1.500 | 1.530 | V |
| Output Voltage | V_{OUT} | $V_{IN}=3$ to 8V LD1117K : $I_{OUT}=0\sim 800\text{mA}$ LD1117A-K : $I_{OUT}=0\sim 1000\text{mA}$ | 1.470 | 1.500 | 1.530 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=3$ to 8V , $I_{OUT}=0\text{mA}$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=3\text{V}$ LD1117K : $I_{OUT}=0\sim 800\text{mA}$ LD1117A-K : $I_{OUT}=0\sim 1000\text{mA}$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^\circ\text{C}$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100\text{mA}$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10\text{V}$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=6.5\text{V}$, $T_J=25^\circ\text{C}$ | LD1117-K | 800 | | mA |
| | | | LD1117A-K | 1000 | | |
| Output Noise Voltage | e_N | $B=10\text{Hz}$ to 10KHz , $T_J=25^\circ\text{C}$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40\text{mA}$, $f=120\text{Hz}$, $T_J=25^\circ\text{C}$, $V_{IN}=4.5\text{V}$, $V_{RIPPLE}=1\text{V}_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100\text{mA}$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500\text{mA}$ | | 1.15 | 1.25 | |
| | | $I_{OUT}=800\text{mA}$ | | 1.20 | 1.30 | |
| | | $I_{OUT}=1\text{A}$ | | 1.30 | 1.40 | |
| Thermal Regulation | | $T_A=25^\circ\text{C}$, 30ms Pulse | | 0.01 | 0.10 | %/W |

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD1117/A-K-1.8

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=3.8V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 1.764 | 1.800 | 1.836 | V |
| Output Voltage | V_{OUT} | $V_{IN}=3.3$ to 8V LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | 1.764 | 1.800 | 1.836 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=3.3$ to 8V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=3.3V$ LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=6.8V, T_J=25^{\circ}C$ | LD1117-K | 800 | | mA |
| | | | LD1117A-K | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=5.5V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.30 | 1.40 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-K-2.5

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|--|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=4.5V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 2.450 | 2.500 | 2.550 | V |
| Output Voltage | V_{OUT} | $V_{IN}=3.9$ to 10V LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | 2.450 | 2.500 | 2.550 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=3.9$ to 10V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=3.9V$ LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=7.5V, T_J=25^{\circ}C$ | LD1117-K | 800 | | mA |
| | | | LD1117A-K | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=5.5V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.30 | 1.40 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD1117/A-K-2.85

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------|------------------|--|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=4.85V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 2.793 | 2.850 | 2.907 | V |
| Output Voltage | V_{OUT} | $V_{IN}=4.25$ to 10V LD1117-K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | 2.793 | 2.850 | 2.907 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=4.25$ to 10V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=4.25V$ LD1117-K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 10V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=7.85V, T_J=25^{\circ}C$ | LD1117-K | 800 | | mA |
| | | | LD1117A-K | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=5.85V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.30 | 1.40 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-K-3.0

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=5V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 2.940 | 3.000 | 3.060 | V |
| Output Voltage | V_{OUT} | $V_{IN}=4.5$ to 10V LD1117-K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | 2.940 | 3.000 | 3.060 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=4.5$ to 12V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=4.5V$ LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 15V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=8V, T_J=25^{\circ}C$ | LD1117-K | 800 | | mA |
| | | | LD1117A-K | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=6V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.30 | 1.40 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD1117/A-K-3.3

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=5.3V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 3.234 | 3.300 | 3.366 | V |
| Output Voltage | V_{OUT} | $V_{IN}=4.75$ to 10V LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | 3.234 | 3.300 | 3.366 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=4.75$ to 15V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=4.75V$ LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 15V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=8.3V, T_J=25^{\circ}C$ | LD1117-K | 800 | | mA |
| | | | LD1117A-K | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=6.3V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.30 | 1.40 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-K-3.6

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|--|-----------------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=5.6V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 3.528 | 3.600 | 3.672 | V |
| Output Voltage | V_{OUT} | $V_{IN}=5$ to 10V LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | 3.528 | 3.600 | 3.672 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=5$ to 15V, $I_{OUT}=0mA$ | | 1 | 6 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=5V$ LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | | 1 | 10 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 15V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=8.6V, T_J=25^{\circ}C$ | LD1117-K | 800 | | mA |
| | | | LD1117A-K | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=6.6V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | | $I_{OUT}=100mA$ | 1.00 | 1.10 | V |
| | | | $I_{OUT}=500mA$ | 1.15 | 1.25 | |
| | | | $I_{OUT}=800mA$ | 1.20 | 1.30 | |
| | | | $I_{OUT}=1A$ | 1.30 | 1.40 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD1117/A-K-5.0

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------------------|------------------|---|-----------|-------|-------|---------|
| Output Voltage | V_{OUT} | $V_{IN}=7V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 4.900 | 5.000 | 5.100 | V |
| Output Voltage | V_{OUT} | $V_{IN}=6.5$ to 15V LD1117-K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1.0A$ | 4.900 | 5.000 | 5.100 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}=6.5$ to 15V, $I_{OUT}=0mA$ | | 1 | 10 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}=6.5V$ LD1117K : $I_{OUT}=0\sim 800mA$ LD1117A-K : $I_{OUT}=0\sim 1000mA$ | | 1 | 15 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.5 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | $I_{OUT}=100mA$ | | | 15 | V |
| Quiescent Current | I_Q | $V_{IN}\leq 15V$ | | 5 | 10 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}=10V, T_J=25^{\circ}C$ | LD1117-K | 800 | | mA |
| | | | LD1117A-K | 1000 | | |
| Output Noise Voltage | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 100 | | μV |
| Supply Voltage Rejection | SVR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}=8V, V_{RIPPLE}=1V_{PP}$ | 60 | 75 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100mA$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500mA$ | | 1.15 | 1.25 | |
| | | $I_{OUT}=800mA$ | | 1.20 | 1.30 | |
| | | $I_{OUT}=1A$ | | 1.30 | 1.40 | |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

For LD1117/A-K-ADJ

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|-------------------------------|------------------|--|-------|-------|-------|---------|
| Reference Voltage | V_{REF} | $V_{IN}-V_{OUT}=2V, I_{OUT}=10mA, T_J=25^{\circ}C$ | 1.225 | 1.25 | 1.275 | V |
| Reference Voltage | V_{REF} | $V_{IN}-V_{OUT}=1.4$ to 10V, $I_{OUT}=10\sim 1000mA$ | 1.225 | 1.25 | 1.275 | V |
| Line Regulation | ΔV_{OUT} | $V_{IN}-V_{OUT}=1.5$ to 13.75V, $I_{OUT}=10mA$ | | | 30 | mV |
| Load Regulation | ΔV_{OUT} | $V_{IN}-V_{OUT}=3V, I_{OUT}=10\sim 800mA$ | | | 30 | mV |
| Temperature stability | ΔV_{OUT} | | | 0.50 | | % |
| Long Term Stability | ΔV_{OUT} | 1000 hrs, $T_J=125^{\circ}C$ | | 0.3 | | % |
| Operating Input Voltage | V_{IN} | | | | 15 | V |
| Adjustment Pin Current | I_{ADJ} | $V_{IN}\leq 15V$ | | 60 | 120 | μA |
| Adjustment Pin Current Change | ΔI_{ADJ} | $V_{IN}-V_{OUT}=1.4$ to 10V, $I_{OUT}=10\sim 1000mA$ | | 1 | 5 | μA |
| Minimum Load Current | $I_{O(MIN)}$ | $V_{IN}=15V$ | | 2 | 5 | mA |
| Current Limit | I_{LIMIT} | $V_{IN}-V_{OUT}=5V, T_J=25^{\circ}C$ | 1000 | | | mA |
| Output Noise (% V_O) | e_N | $B=10Hz$ to 10KHz, $T_J=25^{\circ}C$ | | 0.003 | | % |
| Power Supply Rejection Ratio | PSRR | $I_{OUT}=40mA, f=120Hz, T_J=25^{\circ}C,$ $V_{IN}-V_{OUT}=3V, V_{RIPPLE}=1V_{PP}$ | | 60 | | dB |
| Dropout Voltage | V_D | $I_{OUT}=100mA$ | | 1.00 | 1.10 | V |
| | | $I_{OUT}=500mA$ | | 1.15 | 1.25 | V |
| | | $I_{OUT}=800mA$ | | 1.20 | 1.30 | V |
| | | $I_{OUT}=1A$ | | 1.30 | 1.40 | V |
| Thermal Regulation | | $T_A=25^{\circ}C, 30ms$ Pulse | | 0.01 | 0.10 | %/W |

■ TYPICAL APPLICATIONS

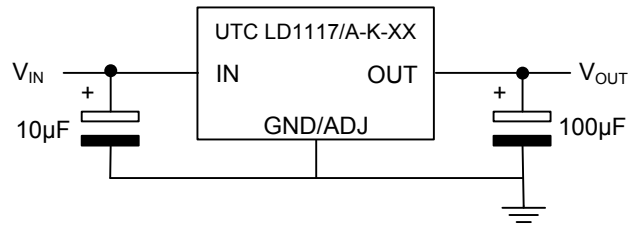


Fig.1 Tynca Application Circuit

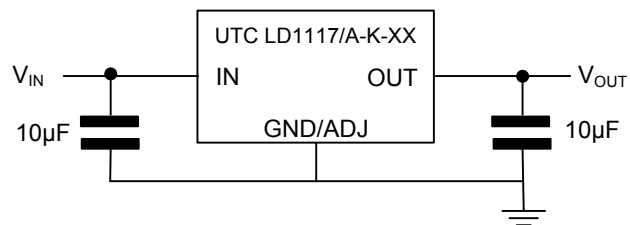


Fig.2 Tynca Application Circuit (FOR MLCC)

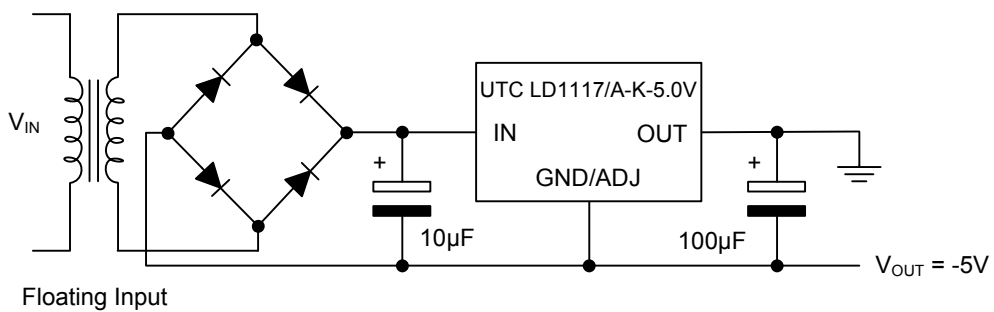


Fig.3 Negative Supply

■ TYPICAL APPLICATIONS (Cont.)

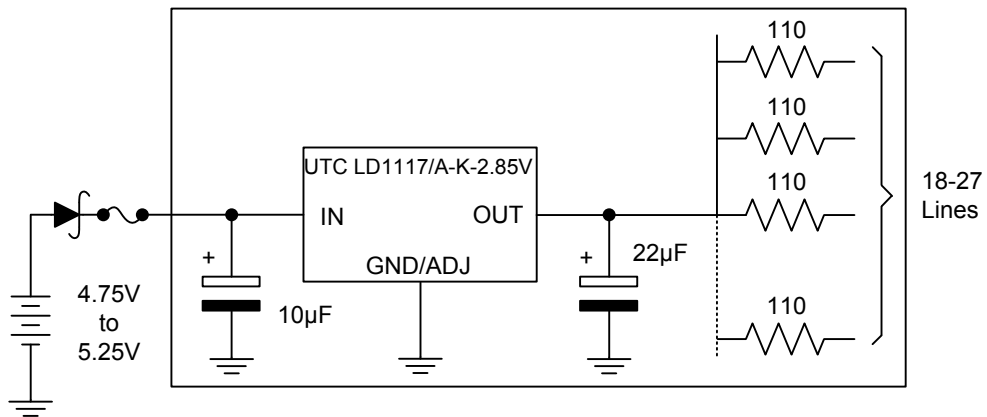


Fig.4 Active Terminator for SCSI-2 BUS

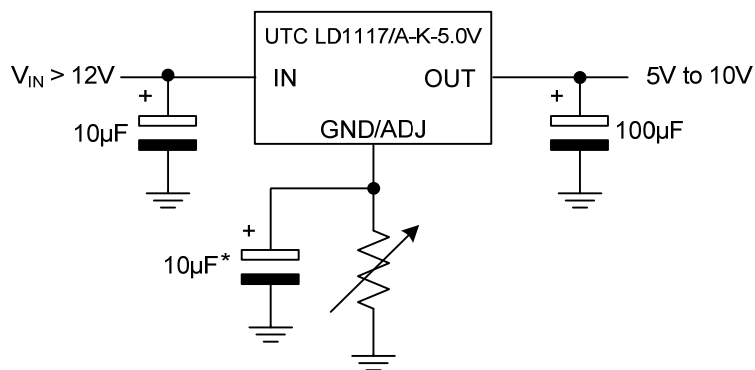


Fig.5 Circuit for Increasing Output Voltage

APPLICATION NOTE

The **LD1117/A-K** adjustable has a reference voltage of between the OUT and ADJ/GND pins. I_{ADJ} is 60µA typ. (120µA max.) and ΔI_{ADJ} is 1µA typ. (5µA max.).

R_1 is normally fixed to 120Ω.

From figure 1 we obtain:

$$V_{OUT} = V_{REF} + R_2(I_{ADJ} + I_{R1}) = V_{REF} + R_2(I_{ADJ} + V_{REF}/R_1) = V_{REF}(1 + R_2/R_1) + R_2 \times I_{ADJ}$$

Usually R_2 value is in the range of few KΩ, so the $R_2 \times I_{ADJ}$ product could be neglected; then the above expression becomes: $V_{OUT} = V_{REF}(1 + R_2/R_1)$

For better load regulation, realize a good Kelvin connection of R_1 and R_2 is important. Particularly R_1 connection must be realized very close to OUT and ADJ/GND pin, while R_2 ground connection must be placed as near as possible to the negative Load pin. Ripple rejection can be improved by introducing a 10µF electrolytic capacitor placed in parallel to the R_2 resistor (See Fig. 3)

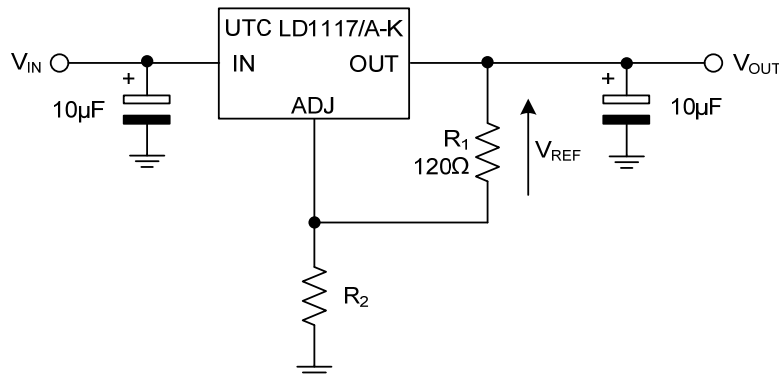


Fig.1 Adjustable Output Voltage Application Circuit

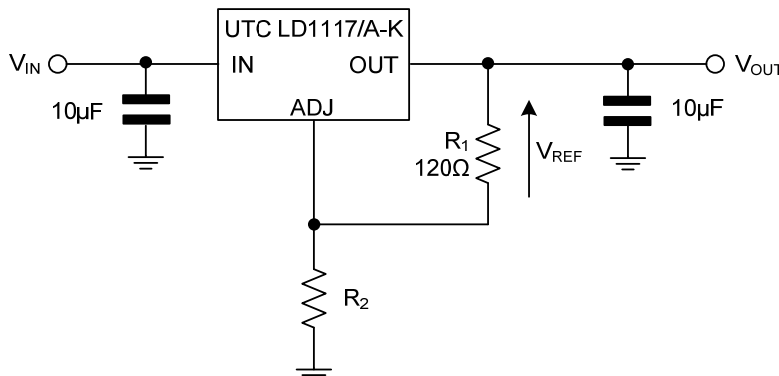


Fig.2 Adjustable Output Voltage Application Circuit (FOR MLCC)






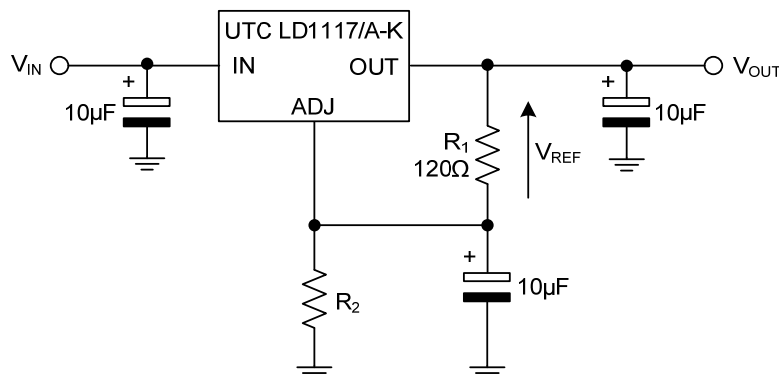


Fig.3 Adjustable Output Voltage Application with improved Ripple Rejection.

■ TYPICAL CHARACTERISTICS

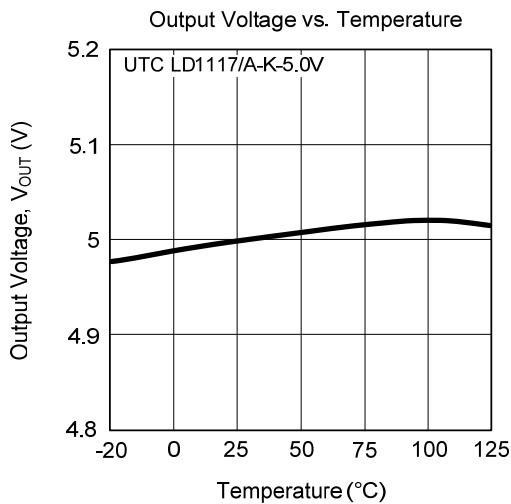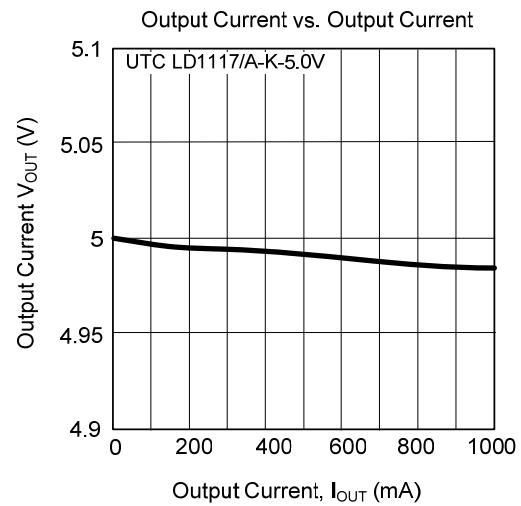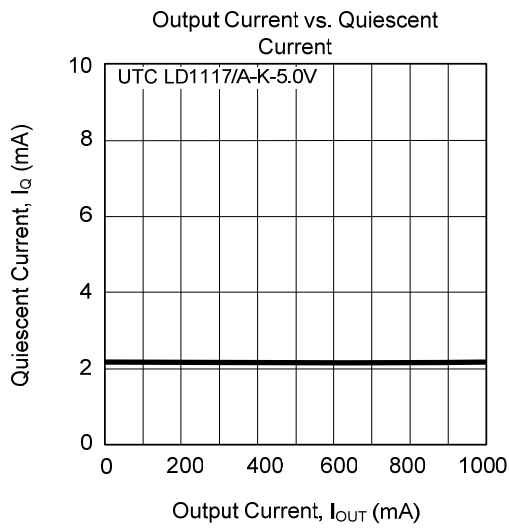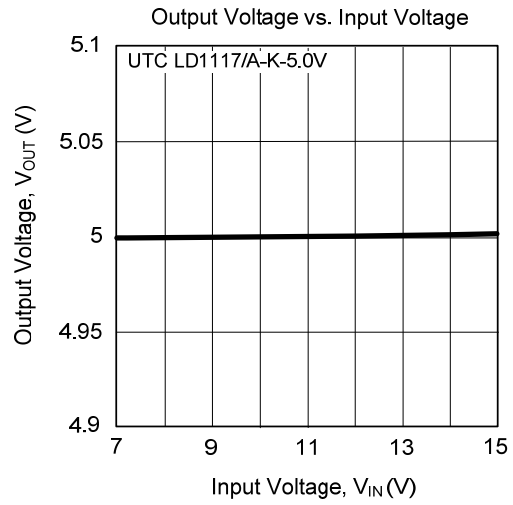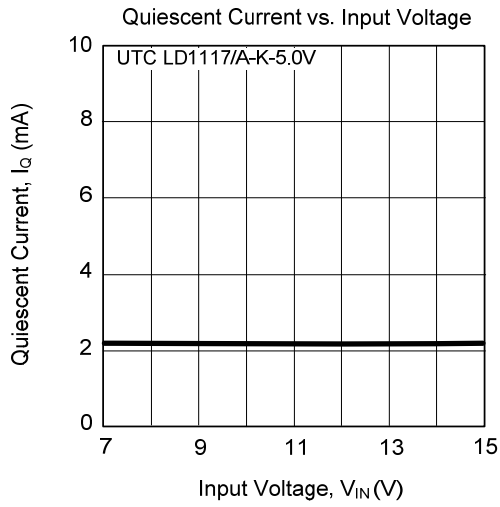

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.