

描述 / Descriptions

SOT-223 塑封封装 电压调整器。
voltage Regulator in a SOT-223 Plastic Package.


特征 / Features

高效率、低压差,输出电流达到 1.0A,内设过流、过热保护。
High efficiency, Low dropout voltage(1V TYP.)output current up to 1.0A, internal current and thermal limit.


用途 / Applications

电压调整器。
Voltage Regulator.

内部等效电路/应用电路 / Equivalent Circuit or Application Circuit

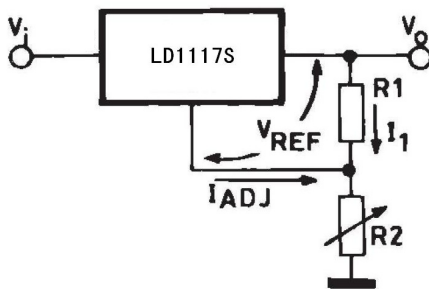

引脚排列 / Pinning



PIN 1 : GND/ADJ PIN 2 : OUT PIN 3 : IN

放大及印章代码 / h_{FE} Classifications & Marking

见印章说明。 See Marking Instructions.

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
DC Input Voltage	V _I	15	V
Thermal Resistance Junction-case	R _{θJC}	15	°C/W
Storage Temperature Range	T _{stg}	-40~150	°C

电性能参数 / Electrical Characteristics(T_j= -25 to 125°C)

参数 Parameter	符号 Symbol	型号 Type	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Reference Voltage	V _{ref}	LD1117S-ADJ	V _{in} -V _o =2V I _o =10mA T _j =25°C	1.238	1.250	1.262	V
			10mA≤I _o ≤1000mA, 1.4V≤(V _{in} -V _o)≤10V	1.225	1.250	1.275	
Output Voltage	V _o	LD1117S-1.8	V _{in} =3.8V I _o =10mA T _j =25°C	1.780	1.800	1.820	V
			0≤I _o ≤1000mA, 3.3V≤V _{in} ≤8V	1.760	1.800	1.840	
		LD1117S-2.5	V _{in} =4.5V I _o =10mA T _j =25°C	2.475	2.500	2.525	V
			0≤I _o ≤1000mA, 3.9V≤V _{in} ≤10V	2.450	2.500	2.550	
		LD1117S-3.3	V _{in} =5.3V I _o =10mA T _j =25°C	3.267	3.300	3.333	V
			0≤I _o ≤1000mA, 4.75V≤V _{in} ≤10V	3.235	3.300	3.365	
		LD1117S-5.0	V _{in} =7V I _o =10mA T _j =25°C	4.950	5.000	5.050	V
			0≤I _o ≤1000mA, 6.5V≤V _{in} ≤15V	4.900	5.000	5.100	
Load Regulation	ΔV _o	LD1117S-Adj	I _o =10mA 1.5V≤(V _{in} -V _o)≤13.75V		0.035	0.2	%
			V _{in} -V _o =3V 10mA≤I _o ≤1000mA		0.1	0.4	
		LD1117S-1.8	I _o =0mA 3.3V≤V _{in} ≤8.0V		1.0	6	mV
			V _{in} =3.3V 0mA≤I _o ≤1000mA		1.0	10	
		LD1117S-2.5	I _o =0mA 3.9V≤V _{in} ≤10V		1.0	6	mV
			V _{in} =3.9V 0mA≤I _o ≤1000mA		1.0	10	
		LD1117S-3.3	I _o =0mA 4.75V≤V _{in} ≤15V		1.0	6	mV
			V _{in} =4.75V 0mA≤I _o ≤1000mA		1.0	10	

电性能参数 / Electrical Characteristics (T_j = -25 to 125°C)


参数 Parameter	符号 Symbol	型号 Type	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit		
Load Regulation	ΔV_o	LD1117S-5.0	6.5V \leq V _{in} \leq 15V I _o =0mA		1.0	10	mV		
			V _{in} =6.5V 0mA \leq I _o \leq 1000mA		1.0	15			
Operating Input Voltage	V _{in}	LD1117S-Adj	I _o =100mA			15	V		
		LD1117S-1.8				10			
		LD1117S-2.5				15			
		LD1117S-3.3				15			
		LD1117S-5.0				15			
Adjustment Pin Current	I _{adj}	LD1117S-Adj	V _{in} \leq 15V		60	120	uA		
Adjustment Pin Current Change	ΔI_{adj}		1.4V \leq V _{in} -V _o \leq 10V 0mA \leq I _o \leq 1000mA		1	5			
Quiescent Current	I _d	LD1117S-1.8	V _{in} \leq 8V		5	10	mA		
		LD1117S-2.5	V _{in} \leq 10V						
		LD1117S-3.3	V _{in} \leq 15V						
		LD1117S-5.0							
Output Current	I _o	LD1117S-Adj	V _{in} -V _o =5V T _j =25°C	800	950	1300	mA		
		LD1117S-1.8							
		LD1117S-2.5							
		LD1117S-3.3							
		LD1117S-5.0							
Output Noise	e _N	LD1117S-Adj	10Hz \leq B \leq 10KHz T _j =25°C		0.003		%		
		LD1117S-1.8							
		LD1117S-2.5						100	uV
		LD1117S-3.3							
		LD1117S-5.0							
Supply Voltage Rejection	SVR	LD1117S-Adj	I _o =40mA f=120Hz T _j =25°C V _{in} -V _o =3V V _{ripple} =1V _{pp}	60	75		dB		
		LD1117S-1.8							
		LD1117S-2.5							
		LD1117S-3.3							
		LD1117S-5.0							

电性能参数 / Electrical Characteristics(Tj= -25 to 125°C)


参数 Parameter	符号 Symbol	型号 Type	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Dropout Voltage	Vd	LD1117S-Adj	Io=100mA Io=500mA Io=800mA Io=1000mA		1.00	1.10	V
		LD1117S-1.8					
		LD1117S-2.5					
		LD1117S-3.3					
		LD1117S-5.0					
Thermal Regulation		LD1117S-Adj	Ta=25°C 30ms Pulse		0.01	0.1	%W
		LD1117S-1.8					
		LD1117S-2.5					
		LD1117S-3.3					
		LD1117S-5.0					

电参数曲线图 / Electrical Characteristic Curve


Load regulation

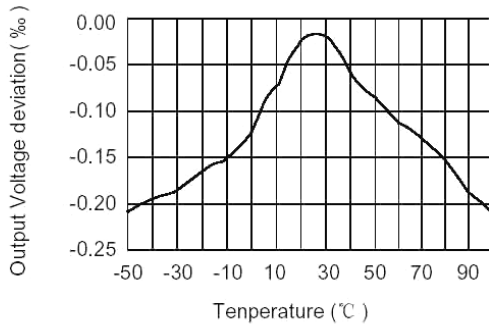


Short circuit current

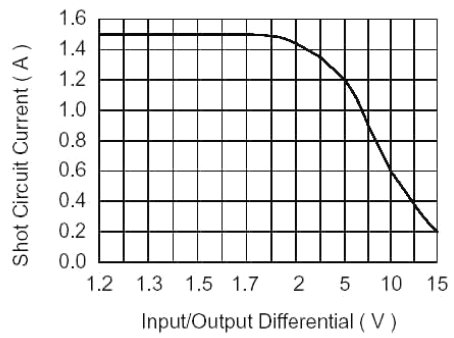


Temperature stability

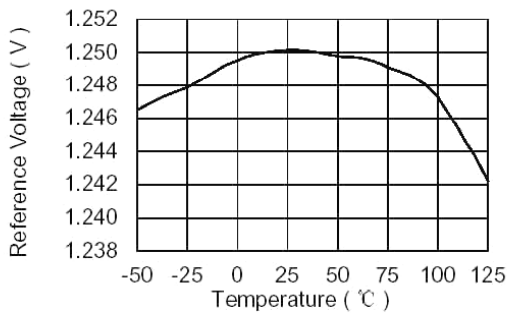


Dropout voltage

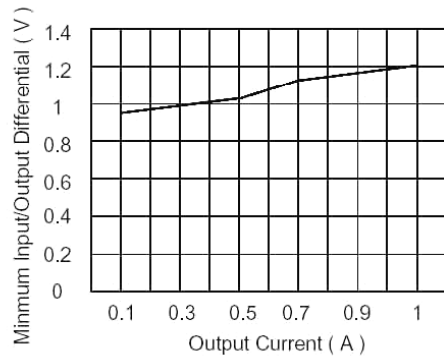


Adjust pin current

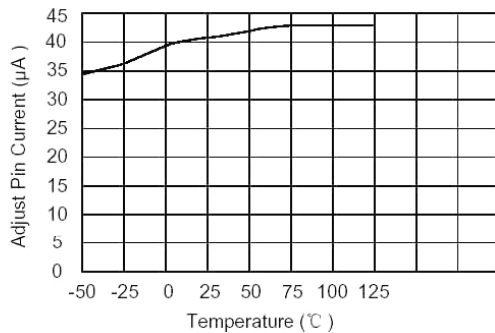


Minimum operating current

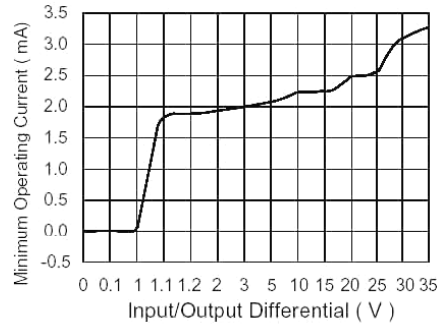

Load transient response

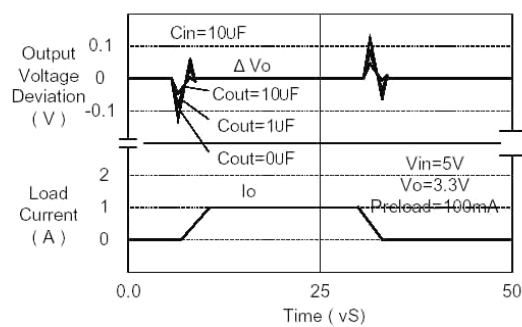


Line transient response

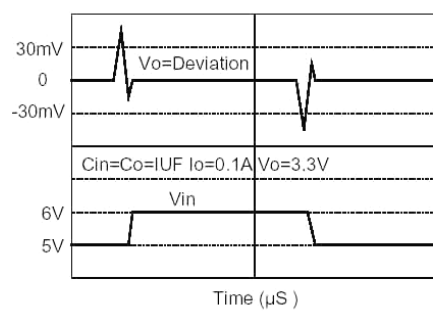

外形尺寸图 / Package Dimensions


SOT-223

单位: mm

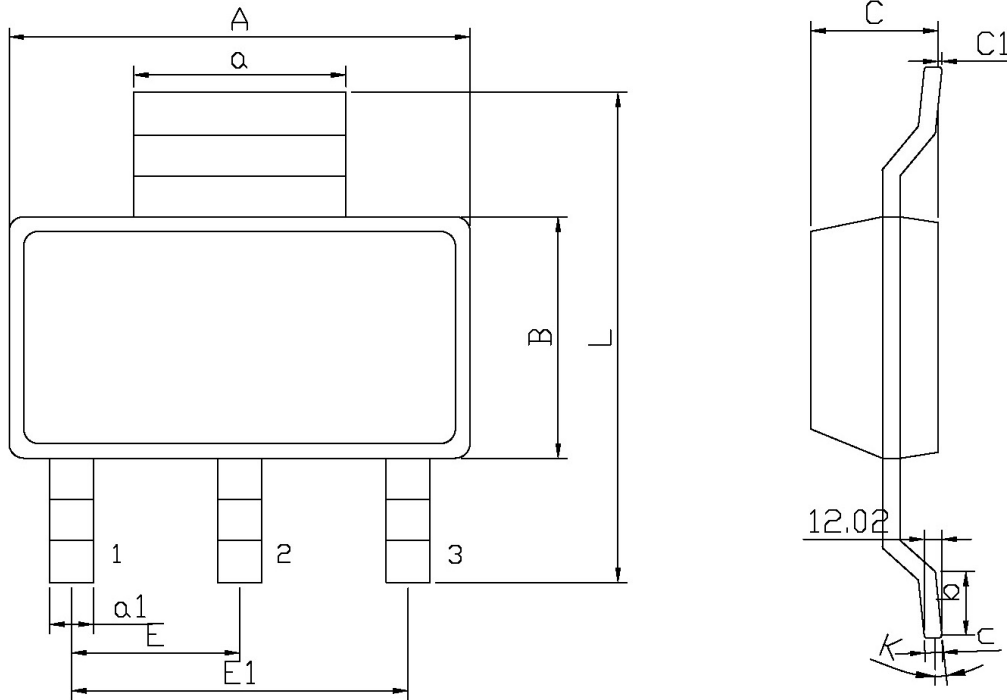

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	6.30	6.70	C	-	1.80
a	2.90	3.10	b	0.91	-
B	3.30	3.70	c	0.24	0.32
L	6.70	7.30	C1	0.02	0.10
a1	0.60	0.80	K	0°	10°
E1	4.10	5.10			
E	2.00	2.60			

印章说明 / Marking Instructions

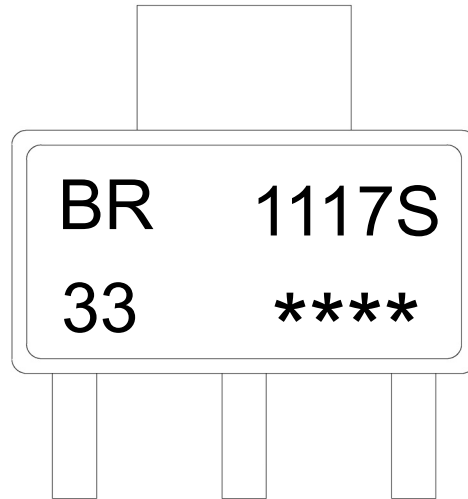

说明：

BR： 为公司代码

1117S： 为型号代码

33： 代表 3.3V

****： 为生产批号代码，随生产批号变化

Note:


BR: Company Code.

1117S Product Type.

33: Deputy 3.3V

****: Lot No. Code, code change with Lot No.

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

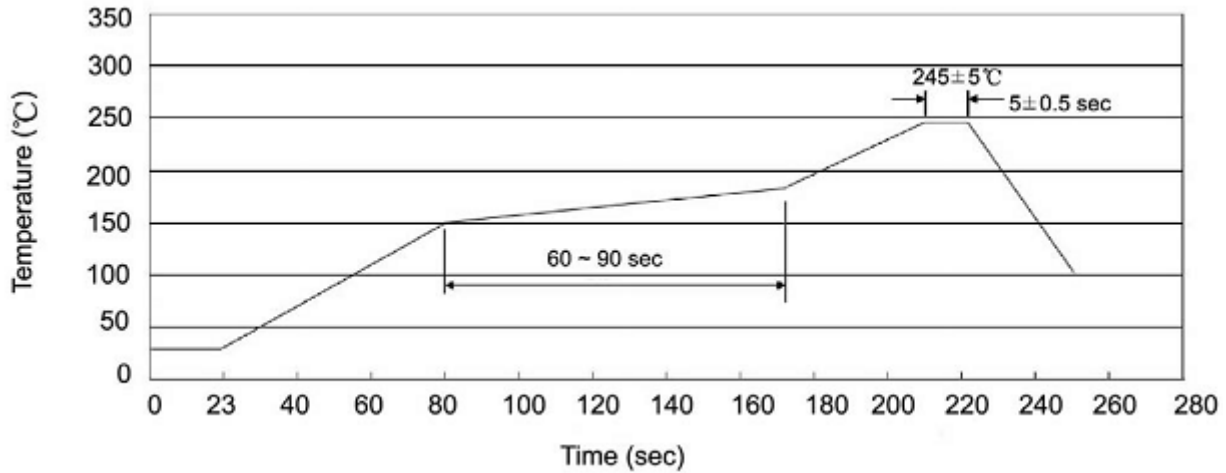

说明：

- 1、预热温度 25~150°C，时间 60~90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-223	2,500	2	5000	5	25,000	13" ×12	340×340×50	385×257×392

使用说明 / Notices